



AGS-Electronics, Ph: 505-550-6501 & 505-565-5102

Fx: 505-814-5778, Em: sales@ags-electronics.com

Web: <http://www.ags-electronics.com>

CATALOG FOR OUR VANDAL-PROOF IP65 / IP67 / IP68 KEYBOARDS, KEYPADS, POINTING DEVICES, ATM PINPADs, MEDICAL & MILITARY KEYBOARDS AND OTHER SIMILAR RUGGED COMPUTER PERIPHERALS



About Us

Factory was established in 2006, is an ISO9001-2015 company specialized in providing industrial/medical/military keyboard solutions. Building a respected, reputable, well known company name demands that we respect our employees, our customers and our partners. By keeping up an honest dialogue, both internally and externally, we get our organization to work together. This foundation is necessary for the forming of lasting partnerships, lasting commitment and lasting mutual gain. We possess the professional experience and empirical knowledge to design, develop, manufacture, market and sell most complete line of vandal proof IP65/IP67/IP68 keyboards, keypads, pointing devices, ATM PINPADs; Medical keyboards and Military keyboards etc.

We are the one-stop-shop for your requirements of products and services in the areas of industrial input devices. Satisfied customers include Finance, Aerospace, Chemicals/Petro, Food & Beverage, Healthcare, Telecom/Media, High Technology, Transportation-Automotive, Manufacturing, Utilities & Resources, Pulp and Paper, Government/Defense, Universities and Academia, Museums/Public Displays and Miscellaneous industries.





An ISO 9001:2015 registered company

PRODUCTION FACTORY IS ISO9001:2015 CERTIFIED



Content

Pointing device	
Pointing device description.....	3
Stainless steel desktop mouse.....	4
Waterproof trackballs.....	5
Force sensing resistor.....	23
Waterproof touchpads.....	26
Keypads integrated with mouse.....	37
Dynamic waterproof Keypads	
Waterproof keypads description.....	40
Dynamic waterproof keypads.....	41
Rugged waterproof Mice & Keyboards	
Waterproof stainless steel keyboards description.....	68
Waterproof stainless steel keyboards	69
Backlight metal keyboards.....	89
Vehicle keyboard description.....	99
Vehicle keyboard.....	100
Medical rubber mice & keyboards description.....	105
Medical rubber mice & keyboards.....	106
Ruggedized rubber mice & keyboards description.....	119
Ruggedized rubber mice & keyboards	120
Rugged membrane keyboards description.....	155
Rugged membrane keyboards	156
Marine/Navy mice & keyboards description.....	170
Marine/Navy mice & keyboards.....	171
Drawer/Plastic keyboards.....	196
Vandal proof phone set.....	207

Waterproof Pointing Device

This series includes the latest design of factory's various pointing devices.

Choosing a right pointer can easily narrow down our extensive products and pin down the perfect one for your application.

Below are our most common options:

- Trackball

When ultra-precise pointing technology is crucial, stainless steel trackball that is vandal-proof for public kiosks/areas.

Factory manufactures four types of trackball:

MTB - IP65 mechanical trackball at 400dpi

OTB - IP68 optical trackball at 800dpi

LTB - IP68 laser trackball at 1200dpi

CTB - IP65 chameleon trackball with backlit at 400dpi

- Touchpad

Fully sealed & tough touchpad, this is a popular choice by customer.

Factory also provides Resistor type touchpad as optional which can be worked with gloves.

Easily be wiped clean, this is also an excellent choice for beverage factories and other industrial areas.


- Force Sensing Resistor pointer

It is a fully sealed pointer that functions similar to a joystick, saving space over a touchpad or trackballs.

This is an excellent choice for outdoor application and military application or in areas where the device is frequently wet, operation with gloves are allowed.

- Joystick

It provides users with a 3-axis joystick function, and can control the output of X (left and right) and Y axis (front and rear) by moving the handle in any direction by $(25^\circ \pm 2^\circ)$; and surely control the Z axis output by rotating $(40^\circ \pm 3^\circ)$. Mouse function optional. With one button on the top of the joystick (2 buttons optional), which can be set as left mouse button or right button before ex-factory.

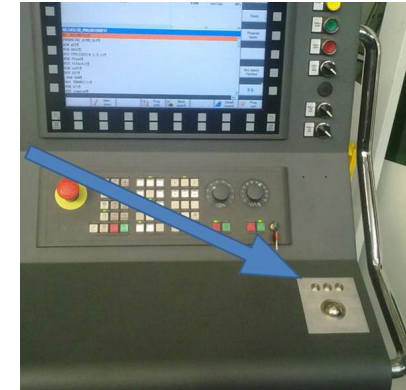




- Sealing to IP68
- Optical mouse for fast moving
- With 2 mouse buttons for right & left clicking
- Complete stainless steel material
- Designed for public outdoor application
- Vandal proof, rugged design

IP Grade	IP68
Interfaces	USB/PS2
Color	Plain stainless steel
Mouse buttons	2
Dimension	125.6mm x 68.0mm x 38.0mm

Close-up



K-TEK-B68-OMS-DT-DWP

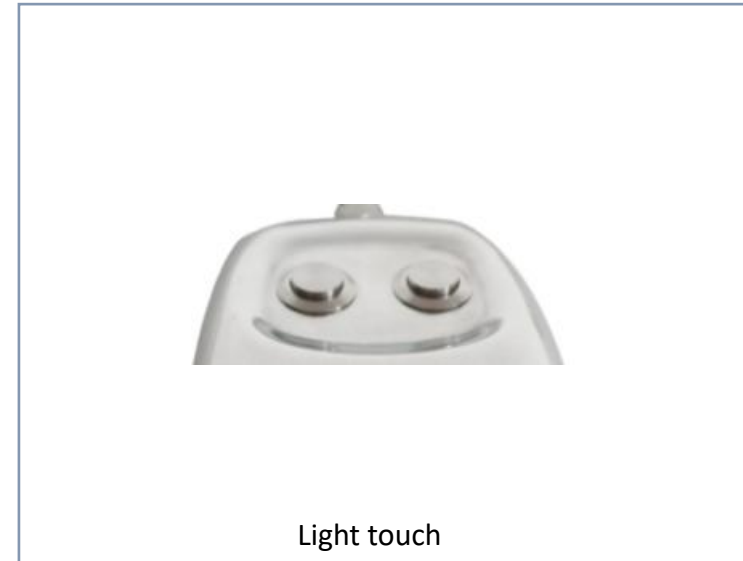

Light touch

K-TEK-38-MTB-AVB-151B




- Sealing to IP65
- 38mm diameter mechanical trackball with 400DPI resolution
- Operating Temperature: -40°C~+ 80° C
- Designed to meet MIL-STD-461G and MIL-STD-810F, military level, strong anti-interference, and low radiation etc.
- 50mm diameter mechanical trackball optional

IP Grade	IP65
Interfaces	USB
Diameter	38mm
Ball color	black harden resin ball
Dimension	60.3.0mm x 60.3mm x 25.43mm


Alternatives



Back view of the item

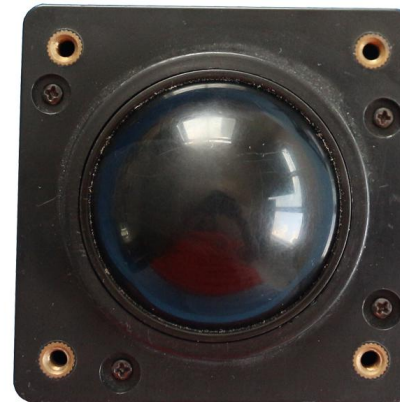

K-TEK-50-MTB-AVB-EMC-151B

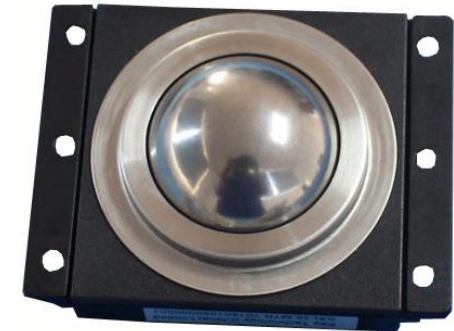

K-TEK-38-MTB

K-TEK-50-MTB-AVB-EMC-151B



- Sealing to IP65
- 50mm mechanical trackball with 400 DPI
- Wide temperature: -40°C to +85°C
- Meets MIL-STD-461G with EMC & MIL-STD-810F
- Rear panel mount solution
- 38mm diameter mechanical trackball optional

IP Grade	IP65
Interfaces	USB 2.0
Diameter	50.0mm
Ball color	black harden resin ball
Dimension	72.6mm x 72.6mm x 34.5mm

Close-up




Back view



- Sealing to IP54
- Ergonomic industrial laser trackball mouse
- With 34mm ergonomic laser trackball with 1200DPI resolutions
- With 3 mouse buttons
- Rugged black color aluminum mounting plate with 4 sinking holes for top panel mounted

IP Grade	IP54
Interfaces	Aviation plug or USB port
Diameter	34mm
Mouse buttons	3
Dimension	105.00mm x 167.00mm(top panel)

Close-up

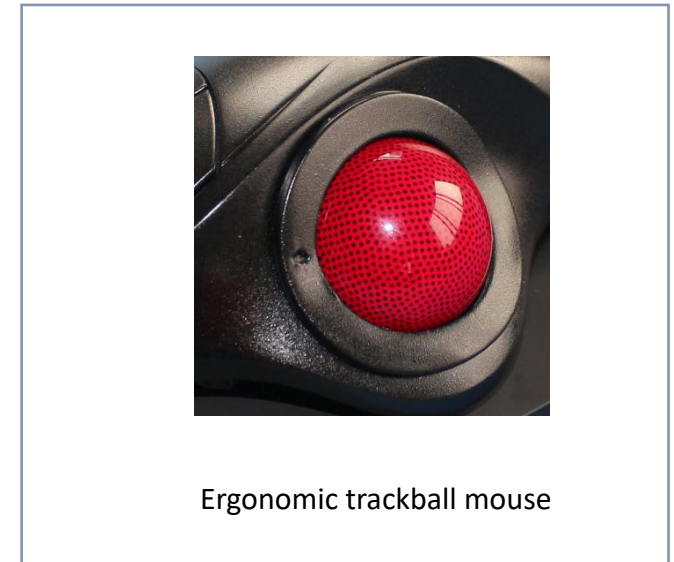

K-TEK-M110-38-MTB-AVB-NV-151B



- 38mm mechanical trackball with 400 DPI
- Black hardened resin ball
- Meets MIL-STD-461G with EMC & MIL-STD-810F
- Aluminum black mouse buttons for right/left clicking, scrolling up and down with ball rolling
- With threaded bolts for top panel mounting solution
- Strong anti-interference, stability and low radiation ability
- Military level, wide Temperature: -40°C to +60°C

IP Grade	IP54(trackball) + IP66(mouse buttons)
Interfaces	Aviation plug or USB port
Diameter	38mm
Mouse buttons	3
Dimension	110.0mm x 126.0mm (Front panel)

Close - up




K-TEK-M120-50-MTB-AVB-NV-151B



- 50mm mechanical trackball with 400 DPI
- Black hardened resin ball
- Meets MIL-STD-461G with EMC & MIL-STD-810F
- Mouse buttons for right/left clicking, scrolling up and down with ball rolling
- With 4 sinking holes for top panel mounting solution
- Strong anti-interference, stability and low radiation ability
- Military level, wide Temperature: -40°C to +60°C

IP Grade	IP54(trackball) + IP66(mouse buttons)
Interfaces	Aviation plug or USB port
Diameter	50mm
Mouse buttons	3
Dimension	120.0mm x 141.0mm (Front panel)

Close - up

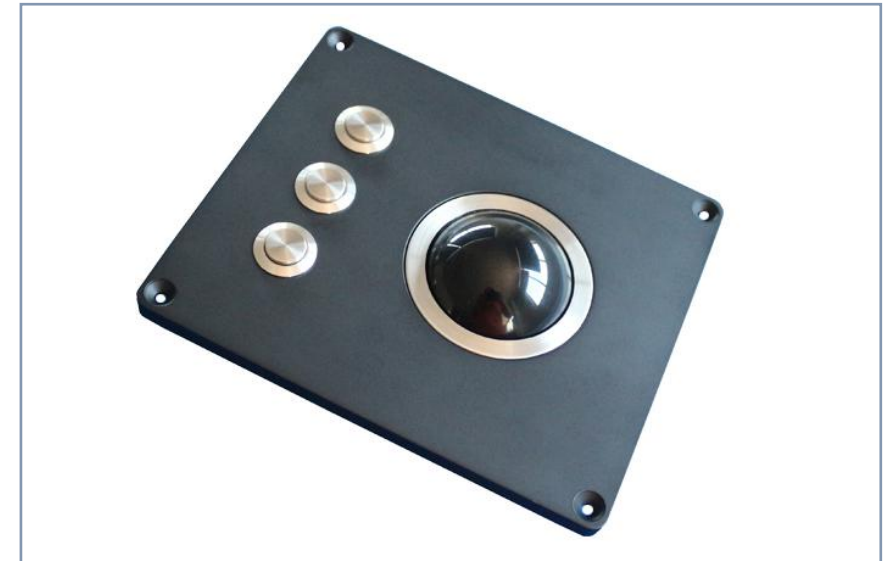



- 38mm mechanical trackball with 400 DPI
- 3 mouse buttons with OMRON key switch technology
- Black titanium electroplated aluminum back plate to be scratch proof and anti-salt mist
- Meets MIL-STD-461G with EMC & MIL-STD-810F
- Rear panel mount solution
- Military level, strong anti-interference, low radiation
- Wide temperature: -40°C to +85°C

IP Grade	IP65 (static)
Interfaces	aviation plug with model J14A-9ZJB, or USB interface
Diameter	38mm
OS	All Windows, Linux, Unix
Dimension	134mm x 159mm (Front panel)

Close - up



K-TEK-B100-JS



- Hall joystick with dual function(joystick/mouse function) optional
- With one button on the top
- Mouse function optional
- 2 stainless steel mouse buttons designed for right & left clicking
- Top panel mounted solution with threaded bolts
- Designed for harsh industrial applications, navigation controls etc.

IP Grade	IP66
Interfaces	USB
G.W.	0.5KGs
Mouse buttons	3
Dimension	100.0mm x 116.0mm x 41.5mm

Alternatives



K-TEK-38-OTB



- Sealing to IP68
- 38.0mm stainless steel optical trackball at 800DPI
- With mouse buttons optional
- Mechanical or backlit trackball optional
- Hardened resin plastic ball optional
- All Windows, Linux, Unix, Mac OSX, Vxworks, Android

IP Grade	IP68
Interfaces	USB/PS2/Y cable
Diameter	16/19/25/38mm
Trackball	Optical trackball at 800DPI
Dimension	54.0mm x 74.0mm (Front panel)

Alternatives




K-TEK-50-MTB



- Sealing to IP65
- 50.0mm mechanical trackball at 400DPI
- With mouse buttons optional
- Laser trackball optional
- With housing optional
- Military level optional
- Wide temperature: -40° C to +80° C

IP Grade	IP65
Interfaces	USB/PS2/Y cable
Diameter	50mm
Trackball	Mechanical trackball at 400DPI
Dimension	77.5mm x 77.5mm (Front panel)

Alternatives

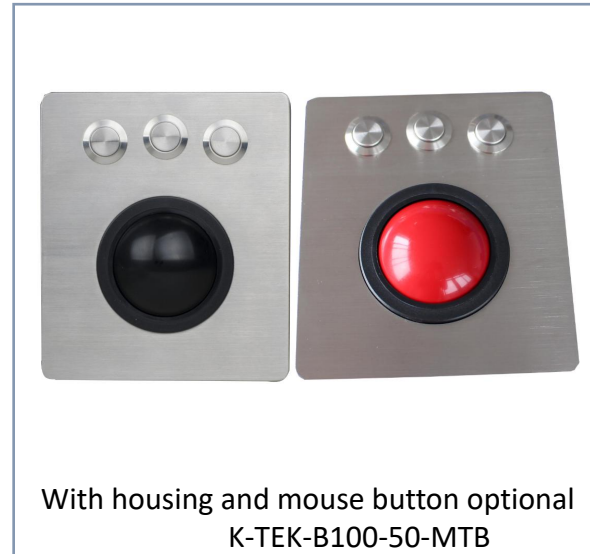



- Sealing to IP67
- Robust design, vandal proof structure
- Brushed stainless steel
- Stainless steel protecting ring along with the trackball
- IP68 washable 25.0mm stainless steel optical trackball module at 800DPI
- With water tight gasket
- Rear panel mount with mounting holes

IP Grade	IP67
Interfaces	USB/PS2/Y cable
Diameter	25.0mm
Mouse buttons	3
Dimension	65.0mm x 80.0mm(Front panel)

Alternatives



Black titanium electroplated
K-TEK-B65-25-OTB-BT-DWP



K-TEK-B95-25-OTB-UT-DWP



Back view of the item
K-TEK-B65-25-OTB-DWP



- Sealing to IP67
- Robust design, vandal proof structure
- Brushed black titanium electroplated on the top surface optional
- Stainless steel protecting ring along with the trackball
- Fully sealed waterproof stainless steel push buttons
- IP68 washable 38.0mm stainless steel optical trackball module at 800DPI
- Hardened silver resin ball for optional
- With water tight gasket
- Top panel mount with thread bolts

IP Grade	IP67
Interfaces	USB/PS2/Y cable
Diameter	38.0mm
Mouse buttons	2
Dimension	78.0mm x 100.0mm(Front panel)

Alternatives



Black titanium electroplated on surface optional
K-TEK-B78-38-OTB-BT-DWP



Hardened silver resin ball optional
K-TEK-B78-38-OTB-DWP



Back view of the item
K-TEK-B78-38-OTB-DWP

K-TEK-A83-38-MTB



- Sealing to IP65
- Robust design, vandal proof structure
- Brushed stainless steel on top surface
- IP65 mechanical 38.0mm stainless steel trackball module at 400DPI
- Hardened black color resin ball for optional
- Rear panel mount with mounting holes around

IP Grade	IP65
Interfaces	USB/PS2/Y cable
Diameter	38.0mm
Mouse buttons	3
Dimension	83.0mm x 110.0mm (Front panel)

Alternatives



www.ags-electronics.com
Model No. K-TEK-A83-38MTB
S/N: A83-38-MTB-20160129K00023
Operating Voltage: DC +5V
MADE IN CHINA

K-TEK-B83-38-OTB-DWP



- Sealing to IP67
- Robust design, vandal proof structure
- Brushed stainless steel on top surface
- Stainless steel protecting ring along with the trackball
- Fully sealed waterproof stainless steel push buttons
- IP68 washable 38.0mm stainless steel optical trackball module at 800DPI
- Hardened silver resin ball for optional
- With water tight gasket
- Rear panel mount with mounting holes around

IP Grade	IP67
Interfaces	USB/PS2/Y cable
Diameter	38.0mm
Mouse buttons	3
Dimension	83.0mm x 110.0mm (Front panel)

Alternatives



Black titanium electroplated
K-TEK-B83-38-OTB-BT-DWP



Hardened resin trackball optional
K-TEK-B83-38-OTB-DWP



K-TEK-B83TP-DWP



- Sealing to IP67
- Robust design, vandal proof structure
- Brushed stainless steel on top surface
- Stainless steel protecting ring along with the trackball
- IP68 washable 25.0mm stainless steel trackball module at 800DPI
- Hardened silver resin ball for optional
- With water tight gasket
- Top panel mount with threaded bolts

IP Grade	IP67
Interfaces	USB/PS2/Y cable
Diameter	25.0mm
Mouse buttons	3
Dimension	88.0mm x 88.0mm (Front panel)

Alternatives



K-TEK-M90-25-MTB-BT



- Sealing to IP65
- Robust design, vandal proof structure
- Scratch-proof black titanium electroplated
- Stainless steel protecting ring along with the trackball
- 25.0mm hardened resin or stainless steel trackball optional
- Integrated with IP65 mechanical trackball at 400DPI
- 25.0mm washable optical trackball with 800DPI optional
- With countersink for panel mount

IP Grade	IP65
Interfaces	USB/PS2/Y cable
Diameter	25.0mm
Mouse buttons	3
Dimension	90.0mm x 105.0mm (Front panel)

Alternatives



K-TEK-A107-38-MTB



- Sealing to IP65
- Robust design, vandal proof structure
- Brushed stainless steel surface
- Stainless steel long stroke mouse buttons
- 38.0mm stainless steel mechanical trackball at 400DPI
- IP68 washable optical trackball at 800DPI optional
- Top panel mounting with threaded bolts

IP Grade	IP65
Interfaces	USB/PS2/Y cable
Diameter	38.0mm
Mouse buttons	3
Dimension	107.0mm x 120.0mm(Front panel)

Alternatives




K-TEK-B107-38-OTB-DWP



- Sealing to IP67
- Robust design, vandal proof structure
- Brushed stainless steel on top surface
- Stainless steel protecting ring along with the trackball
- Fully sealed waterproof stainless steel push buttons
- IP68 rated 38.0mm stainless steel trackball module at 800DPI
- Hardened silver resin ball for optional
- Top panel mount with thread bolts

IP Grade	IP67
Interfaces	USB/PS2/Y cable
Diameter	38.0mm
Mouse buttons	3
Dimension	107.0mm x 120.0mm(Front panel)

Alternatives

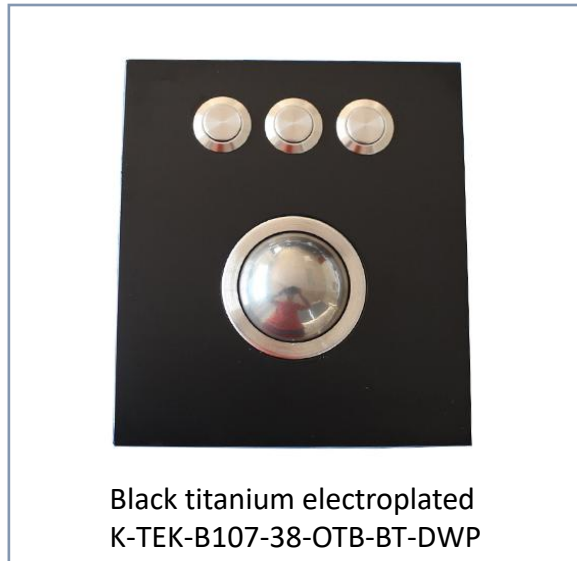

K-TEK-B111-50-MTB-BT




- Sealing to IP65
- Robust design, vandal proof structure
- Integrated with mechanical trackball at 400DPI
- With 3 mouse buttons for left, right and scrolling
- Scratch-proof high quality black titanium electroplated on Stainless steel top surface
- Top panel mount with threaded bolts

IP Grade	IP65
Interfaces	USB/PS2
Diameter	50mm
Mouse buttons	2
Dimension	106.8 x 171.8 x 48.0 mm(Lx W x H)

Close-up



Back view

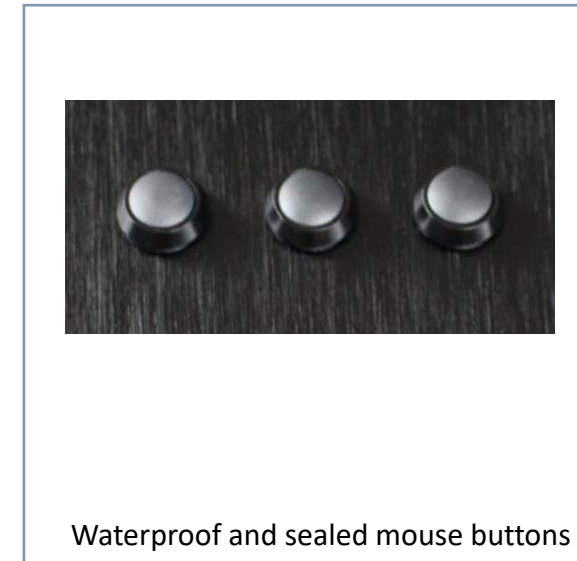



Waterproof and sealed mouse buttons



- Sealing to IP67
- Force sensing resistor type pointing device
- Good for much oil, water, sand etc. application
- Allowed for operation with gloves
- Durable silicone cover
- Panel mount with mounting holes around
- Meet MIL-STD-461G with EMC & MIL-STD-810F

IP Grade	IP67
Interfaces	USB/PS2
Silicone rubber	Logo customizable
Mouse buttons	2 keys + 1 Hula Point button
Dimension	78.5mm X 35.2mm X 8.6mm

Alternatives

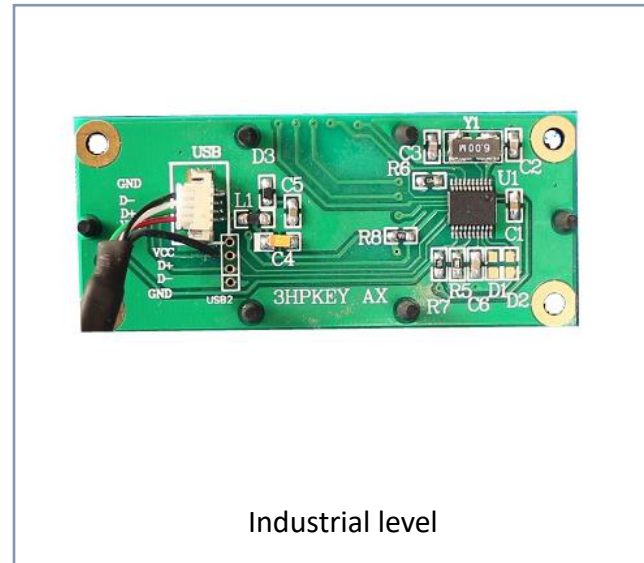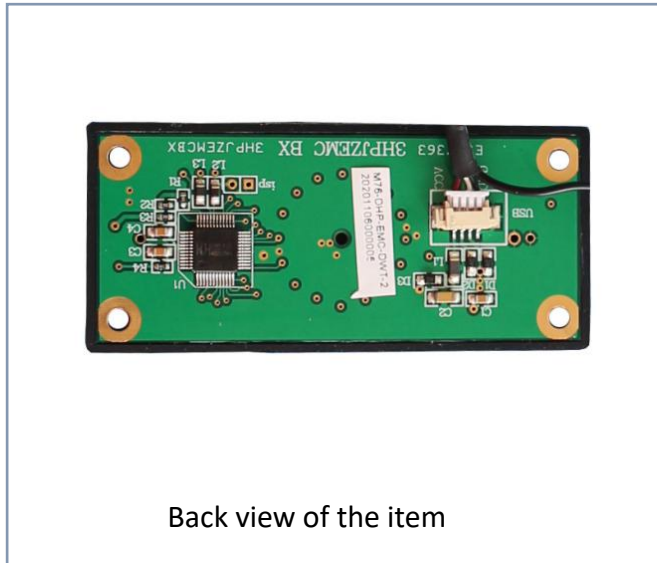




- Sealing to IP67
- Tiny compact design
- Force sensing resistor type pointing device
- Good for much oil, water, sand etc. application
- Allowed for operation with gloves
- Durable silicone cover
- Panel mount with mounting holes around

IP Grade	IP67
Interfaces	USB/PS2
Silicone rubber	Logo customizable
Mouse buttons	2 keys + 1 Hula Point button
Dimension	76.0mm x 32.6mm (Front panel)

Close-up

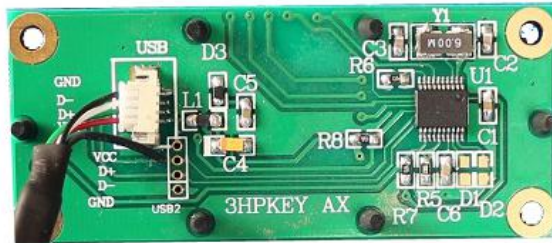

Back view of the item



Military level EMC version




Desktop version for optional K-TEK-M76HP-2-DT-SS



- Sealing to IP67
- Tiny compact design
- Force sensing resistor type pointing device
- Good for much oil, water, sand etc. application
- Allowed for operation with gloves
- Durable silicone cover
- Panel mount with mounting holes around

IP Grade	IP67
Interfaces	USB/PS2
Silicone rubber	Logo customizable
Mouse buttons	3 keys + 1 Hula Point button
Dimension	76.0mm x 32.6mm (Front panel)

Close-up

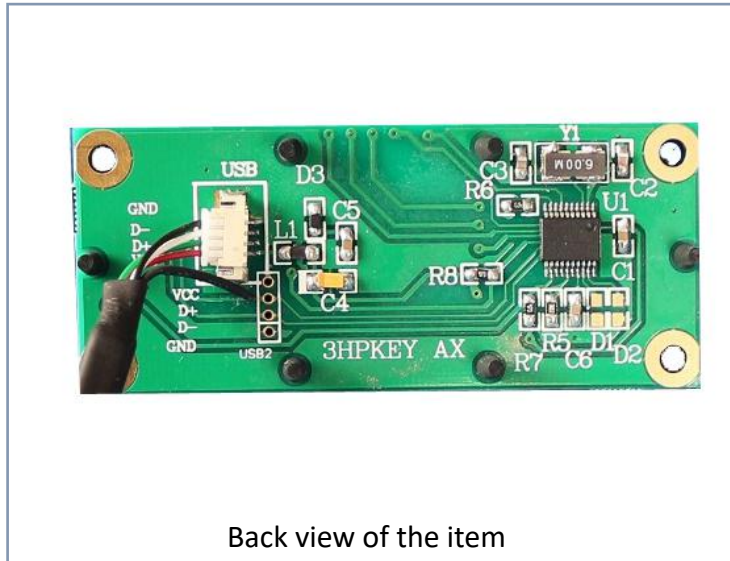

Back view of the item



Desktop version available



- Sealing to IP67
- Electronics controller shielded by aluminum backplate
- Integrated with rugged and tough touchpad
- With 2 mouse buttons
- Rear panel mounting with mounting holes
- Wide temperature of -40 to +80° C optional

IP Grade	IP67
Interfaces	USB/PS2
Color	black
Mouse buttons	2
Dimension	73.0 x 73.0 mm (front panel)


Alternatives



Back view of the item



K-TEK-M270-FN-MS-BL-NV-151B+M73TP

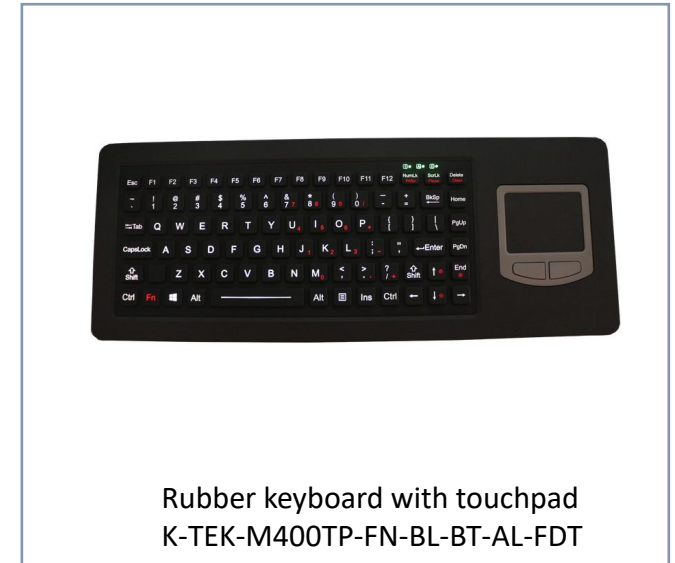

Rubber keyboard with touchpad
K-TEK-M400TP-FN-BL-BT-AL-FDT



- 3 mouse buttons for right & left clicking and scrolling up and down
- With 1.2mm key stroke, domestic brand hula pointer
- Meets MIL-STD-461G with EMC & MIL-STD-810F
- Operation Temperature: -40°C to +60°C
- With mounting holes for rear panel mounting
- Strong anti-interference, stability and low radiation ability

IP Grade	IP67
Interfaces	USB
Switch life	More than 5 million of operations
Mouse buttons	2 keys +1 Hula point button
Dimension	90.0mm x 90.0mm (Front panel)

Alternatives



Back view of the item



K-TEK-M76-DHP-EMC-DWT-2



K-TEK-M90TP-ML




- Military level, sealing to IP67
- Meets MIL-STD-461G with EMC & MIL-STD-810F
- Working Temperature: -40°C to +60°C
- With threaded bolts for top panel mounting solution
- High quality durable black titanium electroplated
- Strong anti-interference, stability and low radiation ability

IP Grade	IP67
Interfaces	Aviation plug or USB connection cable
Lifespan	> 5 years
Mouse buttons	2 keys +1 Hula point button
Dimension	110.0mm x 126.0mm (Front panel)

Close - up



Back view of the item

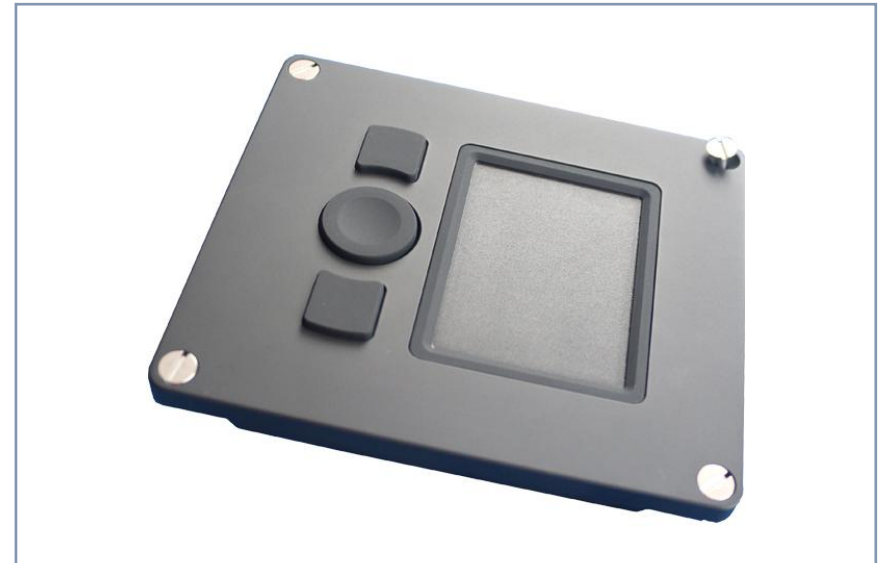





- Sealing to IP65
- Industrial level touchpad module
- USB or PS2 optional
- Different size and color available
- Plug and play
- Multi-touch functionality

IP Grade	IP65
Interfaces	USB/PS2
Mouse buttons	NO
Dimension	65.0mm x 49.0mm (Front panel)

Alternatives

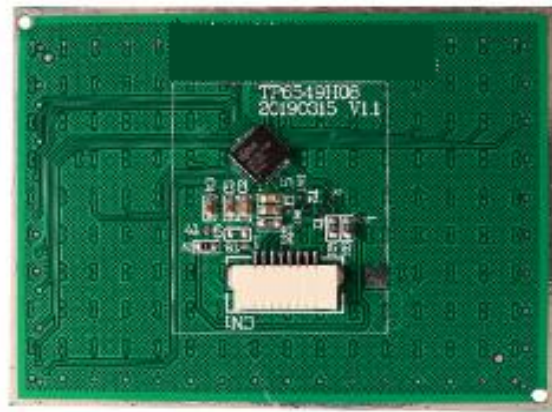

Back view of the item

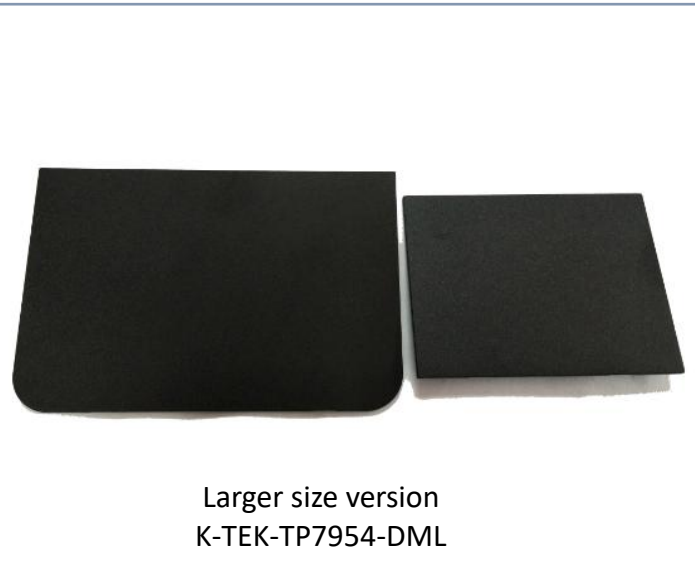

Larger size version
K-TEK-TP7954-DML



Other colors available



- Sealing to IP67
- Industrial level rubber silicone material
- Integrated with rugged and tough touchpad
- With 2 mouse buttons
- Rear panel mounting with mounting holes
- Match with our silicone keyboard for a combo set

IP Grade	IP67
Interfaces	USB/PS2
Diameter	/
Mouse buttons	2
Dimension	90.0mm x 90.0mm (Front panel)

Alternatives



Back view of the item



Military level optional
K-TEK-M90TP-ML



Stainless steel backplate optional
K-TEK-M90TP-IL-SS



- Sealing to IP67
- Robust design, vandal proof structure
- Brushed stainless steel on top surface
- Integrated with rugged and tough touchpad
- With 2 raised stainless steel mouse buttons for left and right clicking
- Rear panel mounting with aluminium plate

IP Grade	IP67
Interfaces	USB/PS2
Diameter	/
Mouse buttons	2
Dimension	80.0mm x 80.0mm (Front panel)

Alternatives





- Sealing to IP67
- Robust design, vandal proof structure
- Brushed stainless steel on top surface
- Integrated with rugged and tough touchpad
- Stainless steel short stroke mouse buttons
- With waterproof gasket
- Rear panel mount with mounting holes

IP Grade	IP67
Interfaces	USB/PS2
Touchpad size	60.0mm x 45.0mm
Mouse buttons	2
Dimension	80.0mm x 80.0mm (Front panel)

Close-up



Back view of the item K-TEK-B80TP-DWP



K-TEK-B80-25-OTB-UT-DWP



Top panel mounting K-TEK-B95TP-DWP



- Sealing to IP67
- Robust design, vandal proof structure
- Brushed stainless steel on top surface
- Integrated with rugged and tough touchpad
- Fully sealed waterproof stainless steel short stroke keys
- Water tight gasket
- Rear panel mount with mounting holes

IP Grade	IP67
Interfaces	USB/PS2
Diameter	/
Mouse buttons	2
Dimension	83.0mm x 110.0mm (Front panel)

Alternatives



Back view of the item
K-TEK-B83TP-DWP



K-TEKB85TP-DT-DWP

B
WATERPROOF



waterproof & rugged push buttons

K-TEK-A107TP



- Sealing to IP65
- Robust design, vandal proof structure
- Brushed stainless steel on top surface
- Integrated with rugged and tough touchpad
- With 2 raised stainless steel mouse buttons
- Top panel mount with threaded bolts

IP Grade	IP65
Interfaces	USB/PS2
Diameter	/
Mouse buttons	2
Dimension	107.0mm x 120.0mm (Front panel)

Alternatives




K-TEK-B107TP-DWP



- Sealing to IP67
- Robust design, vandal proof structure
- Brushed stainless steel on top surface
- Integrated with rugged and tough touchpad
- Fully sealed waterproof stainless steel push buttons
- With waterproof gasket
- Top panel mount with threaded bolts

IP Grade	IP67
Interfaces	USB/PS2
Diameter	/
Mouse buttons	2
Dimension	107.0mm x 120.0mm (Front panel)

Alternatives

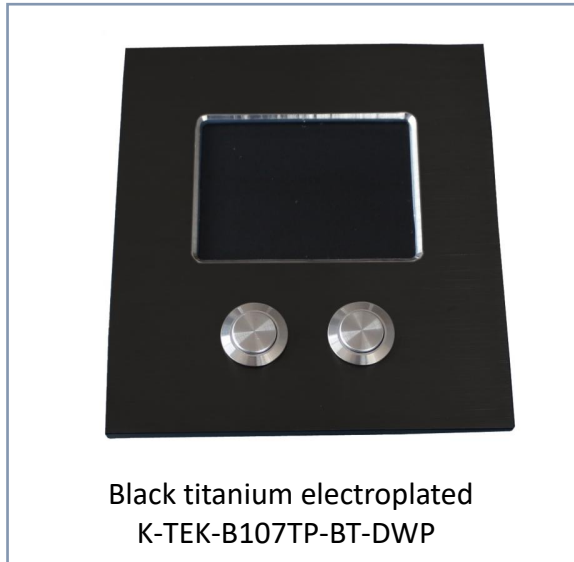


K-TEK-B110TP



- Sealing to IP65
- Robust design, vandal proof structure
- Brushed stainless steel on top surface
- Integrated with rugged and tough touchpad
- With 2 raised stainless steel mouse buttons
- Panel mount with countersink

IP Grade	IP65
Interfaces	USB/PS2
Diameter	/
Mouse buttons	2
Dimension	110.0mm x 90.0mm (Front panel)

Alternatives

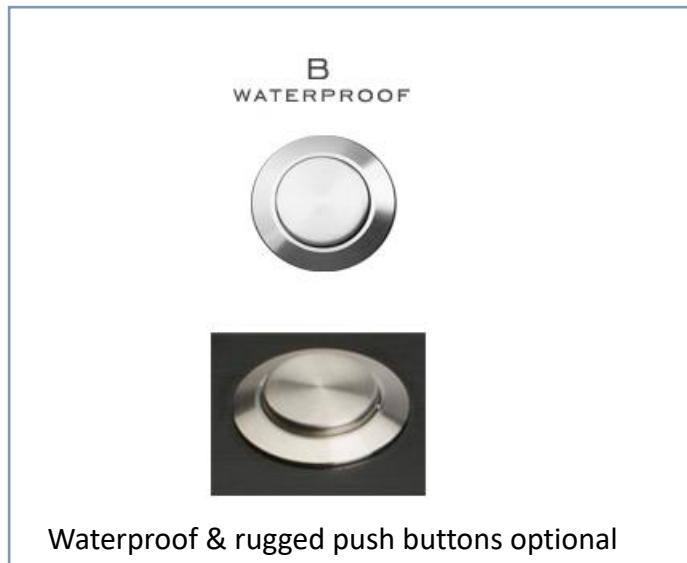

K-TEK-A160TP-KP



- Sealing to IP65
- Robust design, vandal proof structure
- Brushed stainless steel on top surface
- Integrated with rugged and tough touchpad
- Integrated with function keypad
- Long stroke Key switch (2.0mm)
- Top panel mount with threaded bolts

IP Grade	IP65
Interfaces	USB/PS2
Diameter	/
Mouse buttons	2
Dimension	160.0mm x 125.0mm (Front panel)

Alternatives



Desk Top Model
K-TEK-A160TP-KP-DT



Flat keys with short stroke
K-TEK-B160TP-KP



Back view of the item
K-TEK-A160TP-KP


K-TEK-A160-38-MTB-KP



- Sealing to IP65
- Robust design, vandal proof structure
- Brushed stainless steel surface
- Stainless steel long stroke mouse buttons
- Integrated with function keypad
- 38.0mm stainless steel Mechanical trackball at 400DPI
- With washable IP68 optical trackball at 800DPI optional
- Top panel mount with threaded bolts
- Any customized layouts are available

IP Grade	IP65
Interfaces	USB/PS2
Diameter	38.0mm
Mouse buttons	3
Dimension	160.0mm x 125.0mm(Front panel)

Alternatives

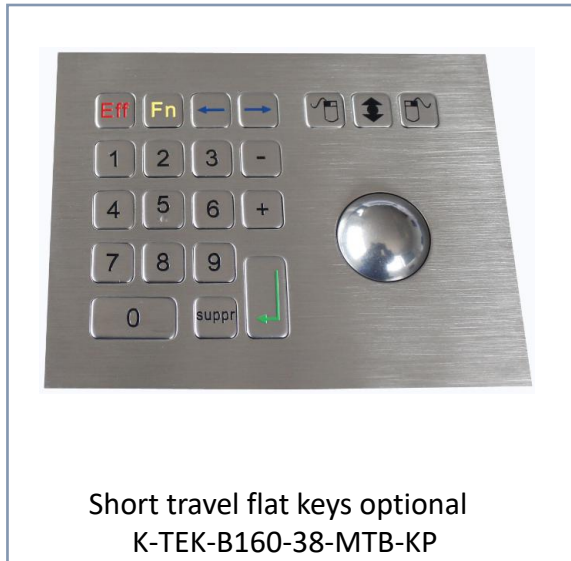

K-TEK-B190TP-KP-BL-IL-DWP




- Sealing to IP67, 31 keys.
- Compact design
- Integrated with rugged and tough touchpad
- Robust design, vandal proof structure
- Brushed high quality stainless steel surface
- With water tight gasket
- With red, blue, white, green backlight optional
- Rear panel mount with mounting holes

IP Grade	IP67
Interfaces	USB/PS2
Keys	31
Mounting	Panel mount
Dimension	190.0mm x 114.0mm (Front panel)

Alternatives



Non-backlit version
K-TEK-B190TP-KP-IL-DWP

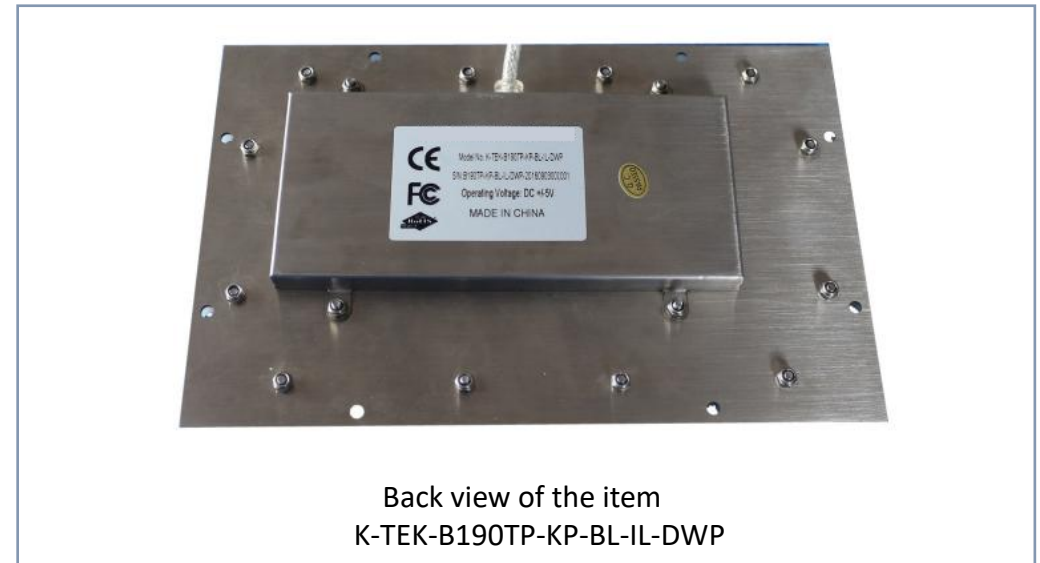

Back view of the item
K-TEK-B190TP-KP-BL-IL-DWP

Dynamic Waterproof Keypad

Waterproof keypads are mainly targeted for unsupervised or semi-supervised positions of various access applications.

Below are our most common options:

- 4/5/6/12/15/16/19/20/24/28/40 keys

Different keys to suit different needs. Production can also adjust the keys in accordance with customer's requirements.

- With or without backlight

When working in dim working environment, luminous keypad is always a primary need.

Factory manufactures high-contrast blue/white/red/yellow/green color backlit keypads.

Non-backlit keypad as optional too.

- Dynamic waterproof

This is patented technology which is known as DWP version. DWP is the core and mature technology which earned a good reputation from our customers. They are designed to meet: IP67 rated for DWP panel mount keypads, IP68 rated for DWP desk top keypads.

- USB/PS2/RS232/RS485/TTL/Dot matrix

Any other customization needed, consult with your regional sales manager.

- Panel mount or desk top version/mountable desk top version

Any other customization needed, consult with your regional sales manager.

- Integrated with optional LCD/VFD display





- Sealing to IP67, 4 keys.
- Tiny compact design
- Robust design, vandal proof structure
- Brushed high quality stainless steel surface
- With water tight gasket
- With red, blue, white, green backlight optional
- Rear panel mount with mounting holes

IP Grade	IP67
Interfaces	dot matrix/USB/PS2
Keys	4
Mounting	Panel mount
Dimension	110.0mm x 30.0mm (Front panel)

Alternatives



Back view of the item



Backlit version
K-TEK-B110FK-4-AC-BL-DWP



PS2/RS232/USB for optional



- Sealing to IP67, 5 keys.
- Tiny compact design
- Robust design, vandal proof structure
- Brushed high quality stainless steel surface
- With water tight gasket
- With red, blue, white, green backlight optional
- Rear panel mount with mounting holes

IP Grade	IP67
Interfaces	dot matrix/USB/PS2
Keys	5
Mounting	Panel mount
Dimension	135.0mm x 30.0mm(Front panel)

Alternatives



Back view of the item



Backlit version
K-TEK-B135FK-5-AC-BL-DWP



Black color optional



- Sealing to IP67, 6 keys.
- Tiny compact design
- Robust design, vandal proof structure
- Brushed high quality stainless steel surface
- With water tight gasket
- With red, blue, white, green backlight optional
- Rear panel mount with mounting holes

IP Grade	IP67
Interfaces	dot matrix/USB/PS2
Keys	6
Mounting	Panel mount
Dimension	160.0mm x 30.0mm(Front panel)

Alternatives



Back view of the item



Backlit version
K-TEK-B160FK-6-AC-BL-DWP



PS2/RS232/USB for optional

K-TEK-A12KP-AC-BL

Waterproof Keypads



- Sealing to IP65, 12 keys.
- Tiny compact design
- Zinc alloy chromed keys and frame
- Metal dot matrix keypad
- With Blue backlight
- Rear panel mount with mounting holes

IP Grade	IP65
Interfaces	Dot matrix
Keys	12
Mounting	Panel mount
Dimension	69.0mm x 72.00mm (Front panel)

Close-up



Back view of the item



Application photo

K-TEK-B48KP-AC-BL-DWP



- Sealing to IP67, 12 keys.
- Tiny compact design
- Robust design, vandal proof structure
- Brushed high quality stainless steel surface
- With water tight gasket
- With red, blue, white, green backlight optional
- Rear panel mount with mounting holes

IP Grade	IP67
Interfaces	dot matrix/USB/PS2/RS232/RS485
Keys	12
Mounting	Panel mount
Dimension	48.0mm x 60.0mm(Front panel)

Alternatives



K-TEK-B60-16-KP-BL-DWP



- Sealing to IP67, 16 keys.
- Tiny compact design
- Robust design, vandal proof structure
- Brushed high quality stainless steel surface
- With water tight gasket
- With red, blue, white, green backlight optional
- Rear panel mount with mounting holes

IP Grade	IP67
Interfaces	USB/PS2/RS232/RS485/dot matrix
Keys	16
Mounting	Panel mount
Dimension	60.0mm x 60.0mm (Front panel)

Alternatives



Back view of the item



Non-backlight version
K-TEK-B60-16-KP-AC-DWP



Black titanium electroplated optional
K-TEK-B60-16-KP-AC-BT-DWP

K-TEK-A68KP-AC-BL-DWP



- Sealing to IP67, 12 keys.
- Mini compact design
- Robust design, vandal proof structure
- Brushed high quality stainless steel surface
- Industrial backlight color can be optional
- Rear panel mount with mounting holes

IP Grade	IP67
Interfaces	dot matrix/USB/PS2/RS232/RS485
Keys	12
Mounting	Panel mount
Dimension	68.0mm x 90.0mm (Front panel)

Alternatives






- Sealing to IP67, 12 keys.
- Comfortable button size 14x21mm
- Robust design, vandal proof structure
- Brushed high quality stainless steel surface
- With water tight gasket
- With red, blue, white, green backlight optional
- Rear panel mount with mounting holes

IP Grade	IP67
Interfaces	dot matrix/USB/PS2/RS232/RS485
Keys	12
Mounting	Panel mount
Dimension	86.0mm x 89.0mm (Front panel)

Alternatives



Back view of the item

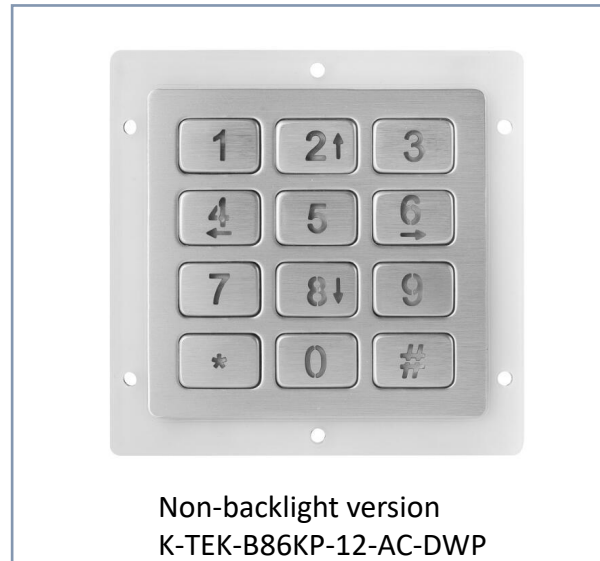

Non-backlight version
K-TEK-B86KP-12-AC-DWP



PS2/RS232/USB for optional


K-TEK-A88KP-AC-BL-DWP



- Sealing to IP67, 12 keys.
- Mini compact design
- Robust design, vandal proof structure
- Brushed high quality stainless steel surface
- Industrial backlight can be optional
- With water tight gasket
- Top panel mount with threaded bolts

IP Grade	IP67
Interfaces	dot matrix/USB/PS2/RS232/RS485
Keys	12
Mounting	Panel mount
Dimension	88.0mm x 102.0mm (Front panel)

Alternatives

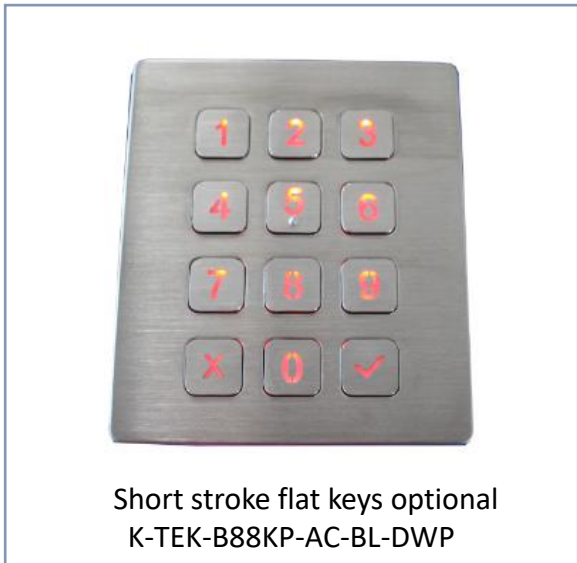


K-TEK-B90KP-16-AC-BL-DWP



- Sealing to IP67, 16 keys.
- Tiny compact design
- Robust design, vandal proof structure
- Brushed high quality stainless steel surface
- With water tight gasket
- With red, blue, white, green backlight optional
- Rear panel mount with mounting holes

IP Grade	IP67
Interfaces	dot matrix/USB/PS2/RS232/RS485
Keys	16
Mounting	Panel mount
Dimension	90.0mm x 83.0mm (Front panel)

Alternatives

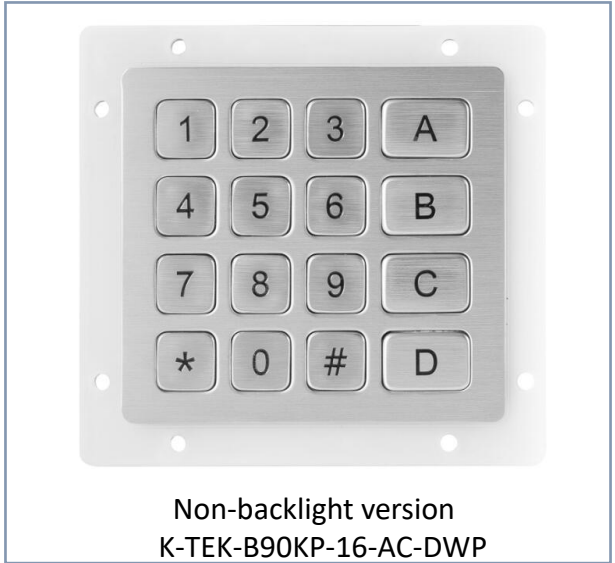


K-TEK-A100-90KP-AC-RP-DWP



- Sealing to IP67, 16 keys.
- Compact design
- Robust design, vandal proof structure
- Brushed high quality stainless steel surface
- With water tight gasket
- Rear panel mount with mounting holes

IP Grade	IP67
Interfaces	dot matrix/USB/PS2/RS232/RS485
Keys	16
Mounting	Panel mount
Dimension	100.0mm x 90.0mm (Front panel)

Alternatives

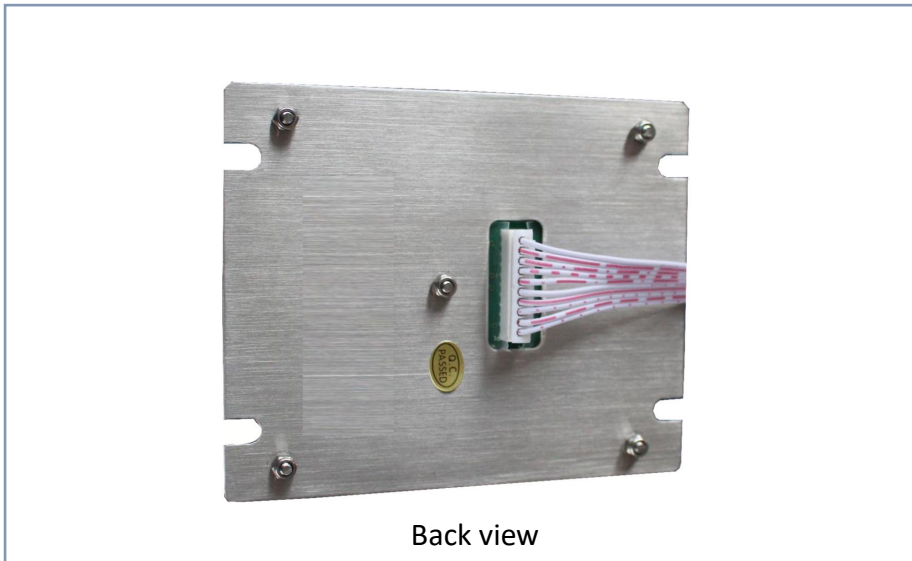




- Sealing to IP67, 16 keys.
- Compact format design
- Robust design, vandal proof structure
- Brushed high quality stainless steel surface
- With water tight gasket
- Rear panel mount with mounting holes
- Customized layout available

IP Grade	IP67
Interfaces	USB/PS2/RS232/RS485/dot matrix
Keys	16
Mounting	Panel mount
Dimension	100.0mm x 91.5mm (Front panel)

Alternatives

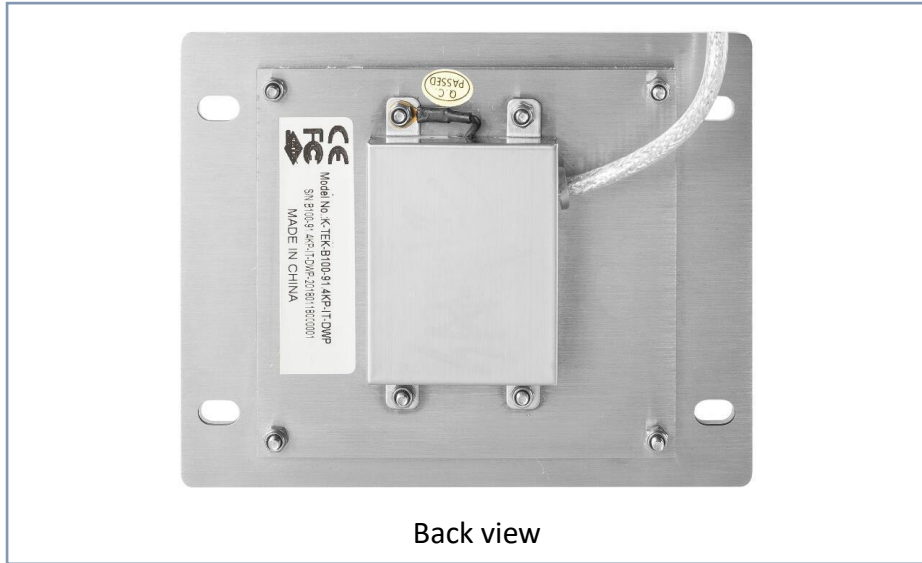

Back view



PS2/RS232/USB/dot matrix

K-TEK-B100-90KP-AC-BL-RP-DWP

Dynamic Waterproof Keypads



- Sealing to IP67, 16 keys.
- Compact design
- Robust design, vandal proof structure
- Brushed high quality stainless steel surface
- With water tight gasket
- With red/blue/white/green backlight optional
- Rear panel mount with mounting holes

IP Grade	IP67
Interfaces	dot matrix/USB/PS2/RSS232/RS485
Keys	16
Mounting	Panel mount
Dimension	100.0mm x 90.0mm (Front panel)

Alternatives



Non-backlit version optional
K-TEK-B100-91.5KP-RP-IT-DWP



Smaller buttons optional
K-TEK-B100-100KP-16S-RP-BL-DWP



15 keys optional
K-TEK-B100KP-15-AC-BL-RP-DWP



K-TEK-A100-90KP-AC-RP-DWP



- Sealing to IP67, 19 keys.
- Compact format design
- Robust design, vandal proof structure
- Brushed high quality stainless steel surface
- With water tight gasket
- Lock key to freeze keypad while cleaning
- Top panel mount with threaded studs

IP Grade	IP67
Interfaces	USB/PS2/RS232/RS485/dot matrix
Keys	19
Mounting	Panel mount
Dimension	118.0mm x 122.0mm (Front panel)

Alternatives



Back view



Desk top version available
K-TEK-A118KP-DT-DWP



K-TEK-A118KP-FDT-DWP



- Compact format design
- Robust design, vandal proof structure
- With water tight gasket
- Top panel mount with threaded studs
- With red/blue backlight optional

IP Grade	IP67
Interfaces	PS2, USB, RS232, RS485 available
Keys	16
Mounting	Panel mount
Dimension	120.0mm x 102.0mm (top panel)

Alternatives



Back view



K-TEK-M120KP-BL-BT-DWP



K-TEK-M88KP-BL-DWP

K-TEK-B120KP-AC-BL-DWP



- Sealing to IP67, 16 keys.
- Compact format design
- Robust design, vandal proof structure
- Brushed high quality stainless steel surface
- With water tight gasket
- With red/blue/white/green backlight optional
- Top panel mount with thread bolts

IP Grade	IP67
Interfaces	dot matrix/USB/PS2/RS232/RS485
Keys	16
Mounting	Panel mount
Dimension	120.0mm x 98.0mm (Front panel)

Alternatives






- Sealing to IP67, 16 keys.
- Compact format design
- Robust design, vandal proof structure
- Brushed high quality stainless steel surface
- With water tight gasket
- Top panel mount with thread bolts

IP Grade	IP67
Interfaces	USB/PS2
Keys	16
Mounting	Panel mount
Dimension	124.0mm x 98.0mm (Front panel)


Alternatives



Back view

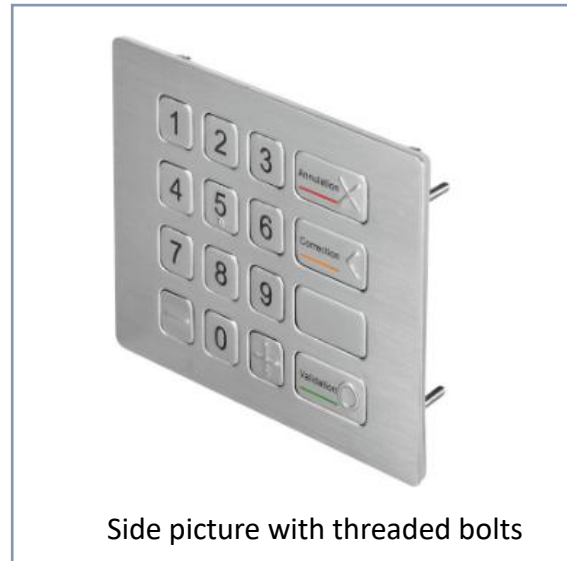

Side picture with threaded bolts

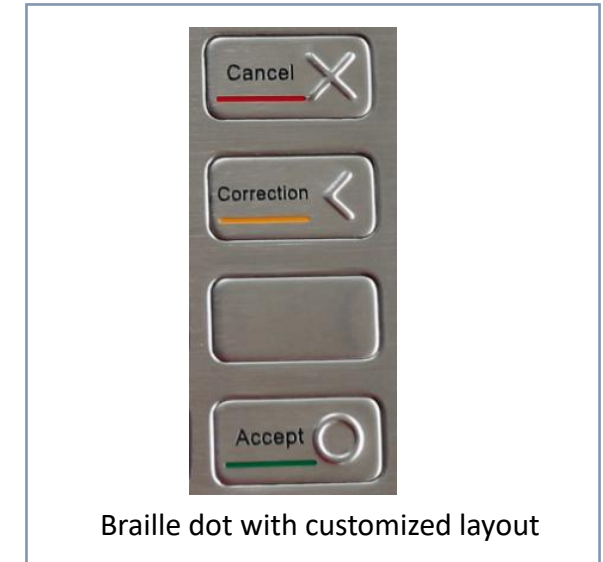

Braille dot with customized layout



- Sealing to IP67, 15 keys.
- Compact format design
- Robust design, vandal proof structure
- Brushed high quality stainless steel surface
- With water tight gasket
- With red/blue/white/green backlight optional
- Top panel mount with thread bolts

IP Grade	IP67
Interfaces	dot matrix/USB
Keys	15
Mounting	Panel mount
Dimension	120.0mm x 155.0mm (Front panel)

Alternatives



Back view



PS2/RS232/USB/dot matrix

K-TEK-B120KP-24-AC-BL-DWP



- Sealing to IP67, 24keys.
- Compact format design
- Flat keys with short stroke 0.45mm
- Robust design, vandal proof structure
- With water tight gasket
- Brushed high quality stainless steel surface
- With red/blue/white/green backlight optional
- Rear panel mount with mounting holes

IP Grade	IP67
Interfaces	dot matrix/USB/PS2/RS232/RS485
Keys	24
Mounting	Panel mount
Dimension	120.0mm x 83.0mm (Front panel)


Alternatives



Back view



Red backlight optional
K-TEK-B120KP-24-AC-BL-DWP

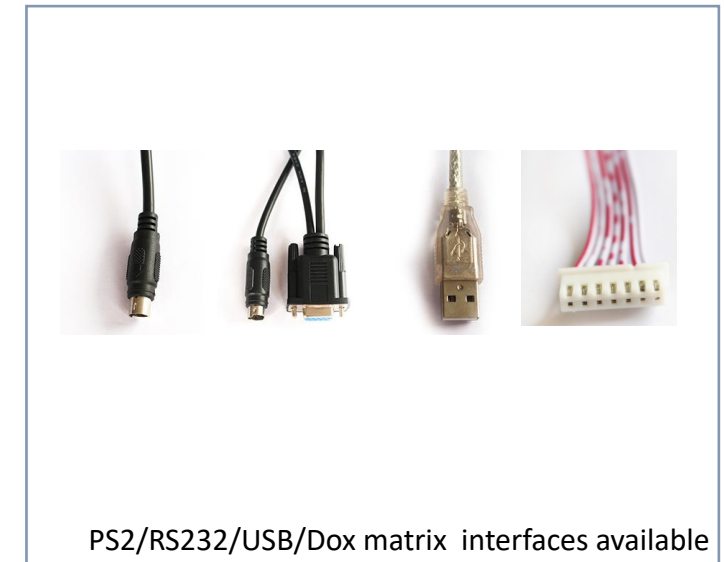

PS2/RS232/USB/Dox matrix interfaces available

K-TEK-B123KP-20-AC-BL-FP-DWP



- Sealing to IP67, 20 keys.
- Compact format design
- Robust design, vandal proof structure
- Brushed high quality stainless steel surface
- With water tight gasket
- With red/blue/white/green backlight optional
- Top panel mount with thread bolts

IP Grade	IP67
Interfaces	dot matrix/USB
Keys	20
Mounting	Panel mount
Dimension	123.0mm x 237.0mm (Front panel)

Alternatives



Back view



PS2/RS232/USB/dot matrix interfaces available

K-TEK-B116KP-LCD-DT-DWP



- Sealing to IP67, 16 keys.
- Compact design
- LCD display integrated, white/yellow/green backlight
- Flat keys with short stroke 0.45mm
- Robust design, vandal proof structure
- Brushed high quality stainless steel surface
- Any layouts can be customized

IP Grade	IP67
Interfaces	USB/PS2/RS232/RS485/dot matrix
Keys	16
Mounting	mountable desktop
Dimension	116.0mm x 166.0mm (Front panel)

Alternatives



Back view



Yellow or white color backlit LCD



Mounting holes

K-TEK-B134KP-VFD-BL-DWP




- Sealing to IP67, 16 keys
- Compact design
- VFD display integrated, LCD optional
- Flat keys with short stroke 0.45mm
- Robust design, vandal proof structure
- Brushed high quality stainless steel surface
- Any layouts can be customized
- Top panel mount with threaded bolts

IP Grade	IP67
Interfaces	USB/PS2/RS232/RS485 dot matrix w/o electronic controller
Keys	16
Mounting	Panel mount
Dimension	134.0mm x 160.0mm (Front panel)

Alternatives



Back view

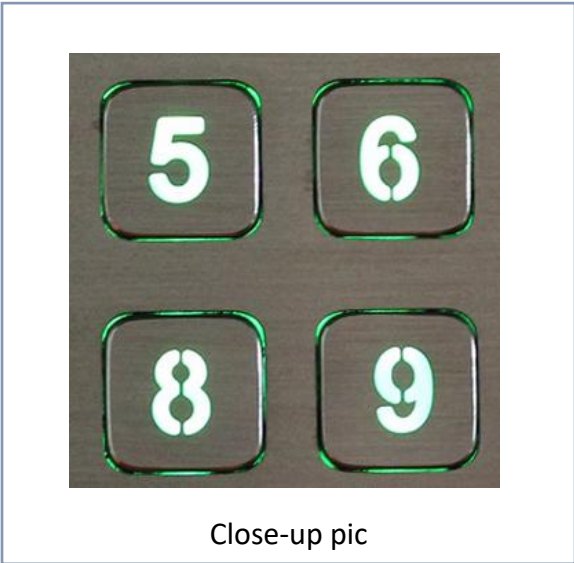

Close-up pic



K-TEK-A134KP-LCD-DWP



- Sealing to IP67, 28 keys.
- Compact format design
- Robust design, vandal proof structure
- Brushed high quality stainless steel surface
- With water tight gasket
- With red/blue/white/green backlight optional
- Rear panel mount with mounting holes

IP Grade	IP67
Interfaces	USB/PS2/RS232/dot matrix
Keys	28
Mounting	Panel mount
Dimension	138.0mm x 83.0mm (Front panel)


Alternatives



Back view



Non-Backlight version
K-TEK-B138KP-28-DWP

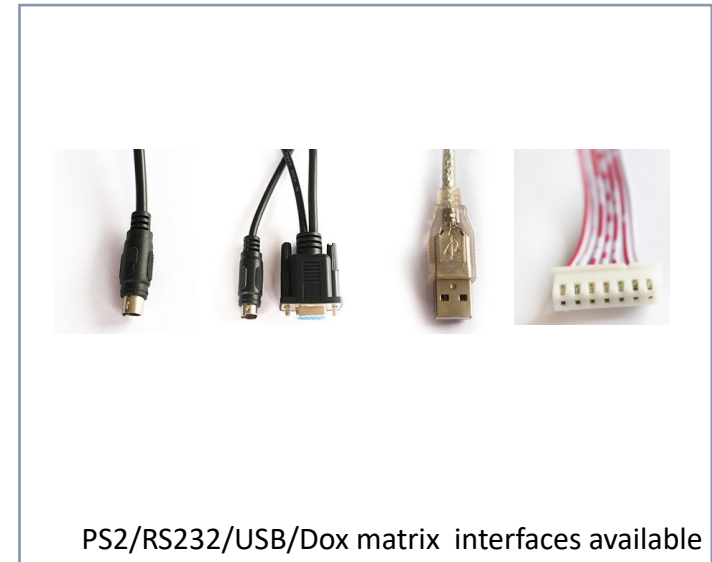

PS2/RS232/USB/Dox matrix interfaces available



- Sealing to IP67, 20 keys.
- Compact format design
- Robust design, vandal proof structure
- Brushed high quality stainless steel surface
- With water tight gasket
- Top panel mount with threaded studs

IP Grade	IP67
Interfaces	USB/PS2/RS232/dot matrix
Keys	20
Mounting	Panel mount
Dimension	139.0mm x 98.0mm(Front panel)

Alternatives



Back view



With 24keys optional
K-TEK-B139KP-24-DWP



PS2/RS232/USB/Dox matrix available



Desktop version optional
K-TEK-B139KP-20-DT-DWP



- Sealing to IP65, 16 keys
- Compact design
- Flat keys with short stroke 0.45mm
- Robust design, vandal proof structure
- Brushed high quality stainless steel surface
- Any layouts can be customized
- Rear panel mount with mounting holes

IP Grade	IP65
Interfaces	USB/PS2/RS232/RS485 dot matrix
Keys	16
Mounting	Panel mount
Dimension	160.0mm x 102.3mm (Front Panel)

Alternatives






- Sealing to IP67, 40 keys.
- Compact design
- Robust design, vandal proof structure
- Key switch with short stroke 0.45mm
- Brushed high quality stainless steel surface
- With water tight gasket
- Rear panel mount with mounting holes

IP Grade	IP67
Interfaces	USB/PS2/RS232/dot matrix
Keys	40
Mounting	Panel mount
Dimension	80.0mm x 140.0mm (Front panel)


Alternatives



Back view

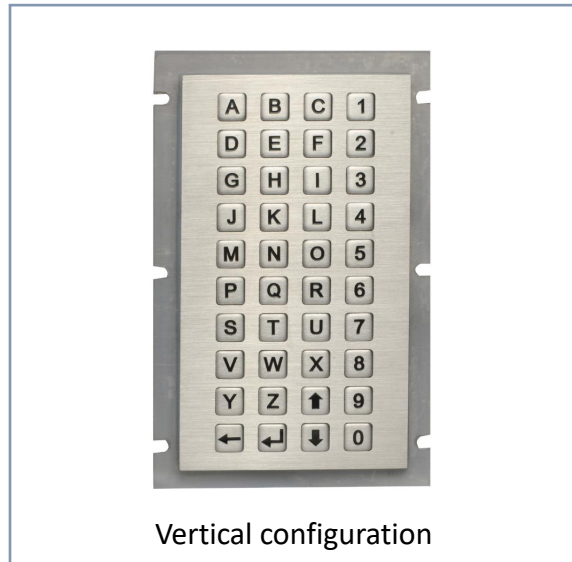

Vertical configuration

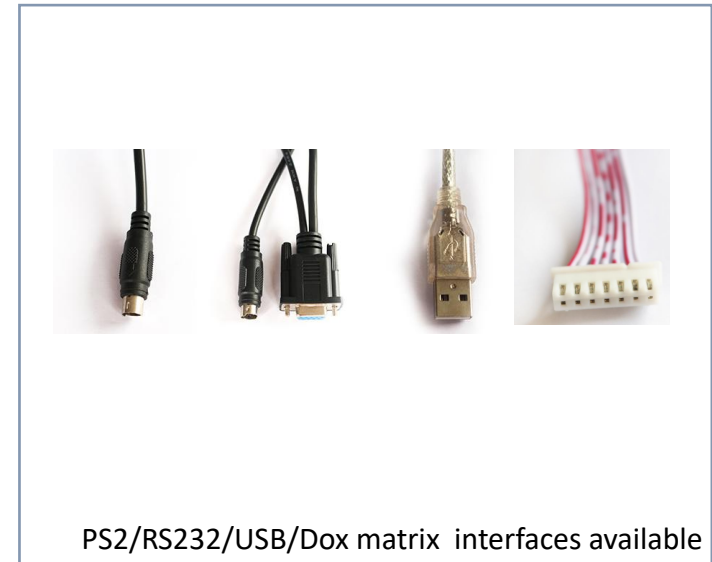


PS2/RS232/USB/Dox matrix interfaces available



- Sealing to IP67
- Compact format design
- Robust design, vandal proof structure
- Brushed high quality stainless steel surface
- 2.0mm long stroke keys for fast input
- Rear panel mount with mounting holes
- With water tight gasket
- Ease of customizing with multiple languages
- PS/2 or USB interface for optional

IP Grade	IP67
Interfaces	USB/PS2
Keys	40
Mouse	without mouse
Dimension	191.0mm x 88.0mm (Front panel)

Alternatives

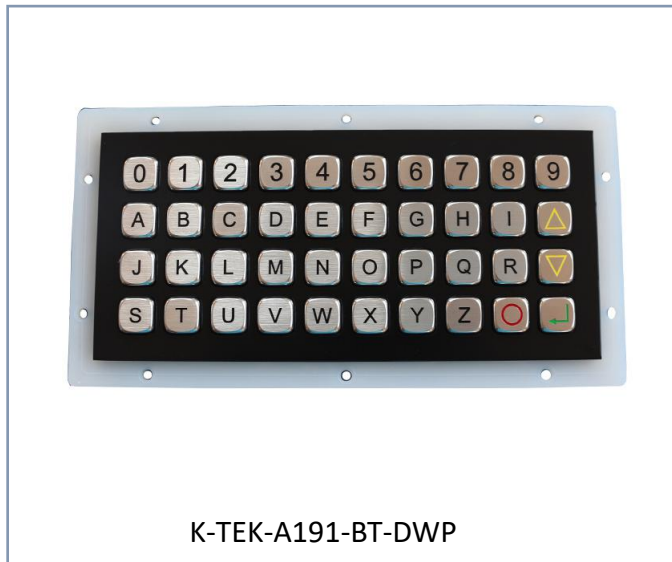

Waterproof Stainless Steel Keyboard

Factory's DWP keyboards are mainly targeted for unsupervised or semi-supervised positions of various access applications.

DWP means Dynamic Water Proof, Dynamic Washable Proof, Deep Water Proof, Direct Water proof, Dive Water proof. Which is good for outdoor application with direct rain and very harsh environments with humidity, much dynamic water, oil, dirt, salt mist etc, no rust risk and anti-salt spray corrosion.

- With or without mouse(Touchpad/trackball)
- With or without black titanium electroplated on stainless steel surface
- With or without backlight
- With or without braille dots
- Dynamic waterproof (IP65/IP67 rated for DWP panel mount keyboards, IP68 rated for DWP desktop keyboards)
- Panel mount/ desktop version/mountable desktop version



K-TEK-A365TP-FN-DT-DWP-2.4G


Dynamic Waterproof Keyboard



- Sealing to IP67
- 2.4GHz wireless stainless steel keyboard with one receiver for signal transmitting up to 10m
- An excellent tactile feeling for fast data input
- SUS304 Brushed stainless steel housing
- With touchpad and FN keys integrated
- movable stand alone DESK TOP VERSION
- Customized layout available

IP Grade	IP67
Key	85 keys
Key travel	2.0mm
Switch life:	5 million
Dimension	365.0mm x 165.0mm x 28.5mm

Alternatives

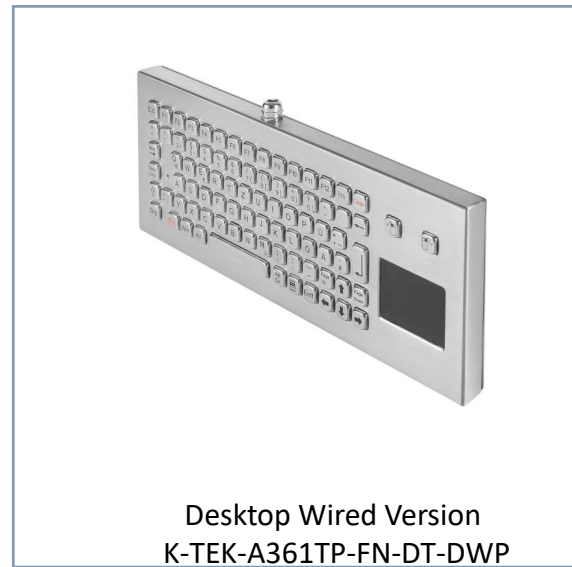



- Sealing to IP67
- Ideal for coal and mine applications
- With ruggedized tough domestic brand hula pointer mouse
- Touchpad or trackball optional
- Rear panel mount solution
- Extremely good tactile feeling

IP Grade	IP67
Key	71 keys
Key travel	2.0mm
Switch life:	5 million
Dimension	343.0mm x 105.0mm(front panel)

Alternatives



Back View



K-TEK-A382TP-DHP-FN-DT-DWP



K-TEK-A361-JS-FN-DT-DWP



- Sealing to IP68, high configuration
- Integrated with joystick and optical trackball
- FN+Clean combination keys for easy cleaning
- Good for outdoor and marine applications
- Desktop version
- Panel mounted version available

IP Grade	IP68
Key	83 keys
Key travel	2.0mm
Switch life:	5 million
Dimension	443.0mm x 145.0mm

Alternatives



K-TEK-A343TP-MDT-DWP



- With IP65 sealed tough touchpad
- Customized layout available
- Mechanical/Optical trackball optional
- Robust design, vandal proof structure
- Mountable desktop solution
- Braille dots optional

IP Grade	IP68
Key	70 keys
Key travel	2.0mm
Switch life:	5 million
Dimension	403.0mm x 165.0mm x 60.0mm (L x W x H)

Alternatives



Back View



K-TEK-A343-MTB-MDT-DWP



K-TEK-A420-OTB-KP-FN-MDT-DWP


K-TEK-A19U-MTB-KP-FN




- Sealing to IP65, 100Keys
- An excellent tactile feeling for fast data input
- SUS304 Brushed stainless steel surface
- 4 in 1 keyboard with full functionality
- With IP65 mechanical trackball at 400DPI
- Top panel mount for 1U rack
- Customized layout available

IP Grade	IP65
Interfaces	USB/PS2
Key travel	2.0mm
Switch life	5 million
Dimension	482.6mm x 133.3mm (Front panel)

Alternatives

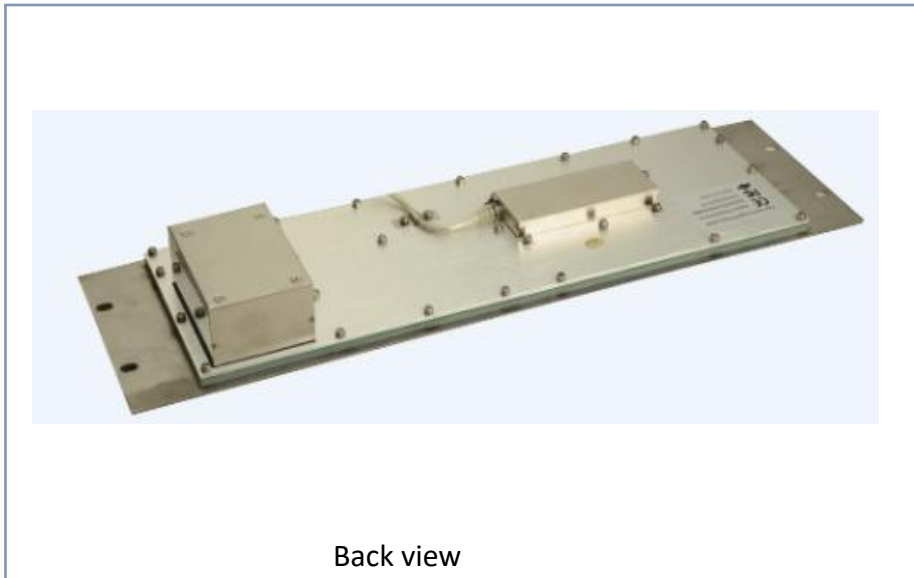

Back view

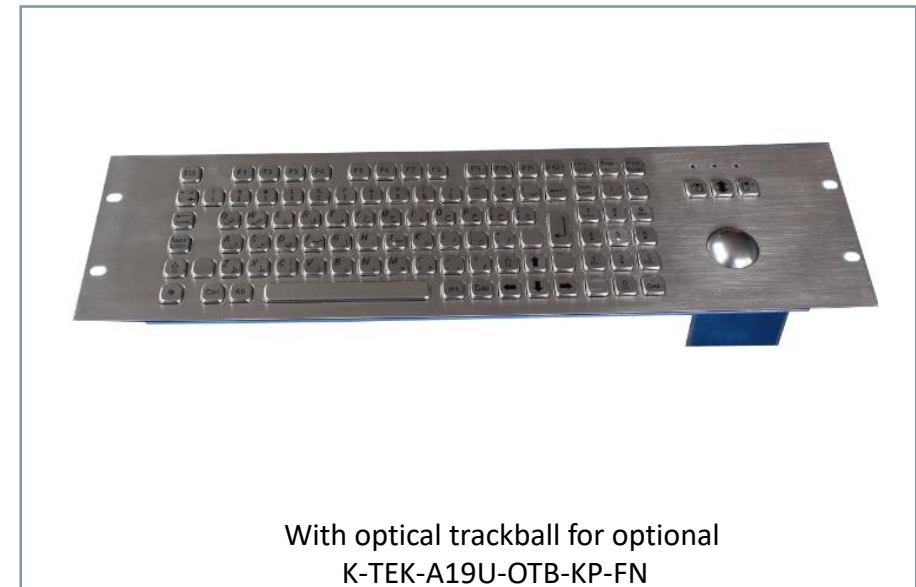

With optical trackball for optional
K-TEK-A19U-OTB-KP-FN



- Sealing to IP65, 94Keys
- Highly robust, vandal proof structure
- An excellent tactile feeling for fast data input
- SUS304 Brushed stainless steel housing
- With touchpad and FN keys integrated
- Top panel mount with threaded bolts
- Customized layout available

IP Grade	IP65
Interfaces	USB/PS2
Key travel	2.0mm
Switch life:	5 million
Dimension	238.0mm x 152.0mm(Front panel)


Alternatives



Back View



Desktop Version
K-TEK-A228TP-FN-DT

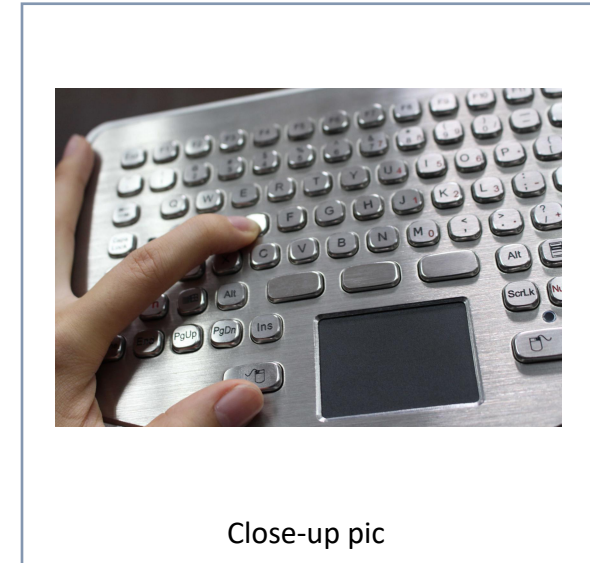

Close-up pic


K-TEK-A224-UT-DWP



- Sealing to IP67, 53Keys
- Ultra thin, overall thickness 7.2mm only
- An excellent tactile feeling for fast data input
- SUS304 Brushed stainless steel surface
- Dynamic washable via pouring water
- Rear panel mount with mounting holes
- With tight water gasket
- Customized layout available

IP Grade	IP67
Interfaces	USB/PS2
Key travel	2.0mm
Switch life	5 million
Dimension	224.0mm x 110.0mm (Front panel)


Alternatives

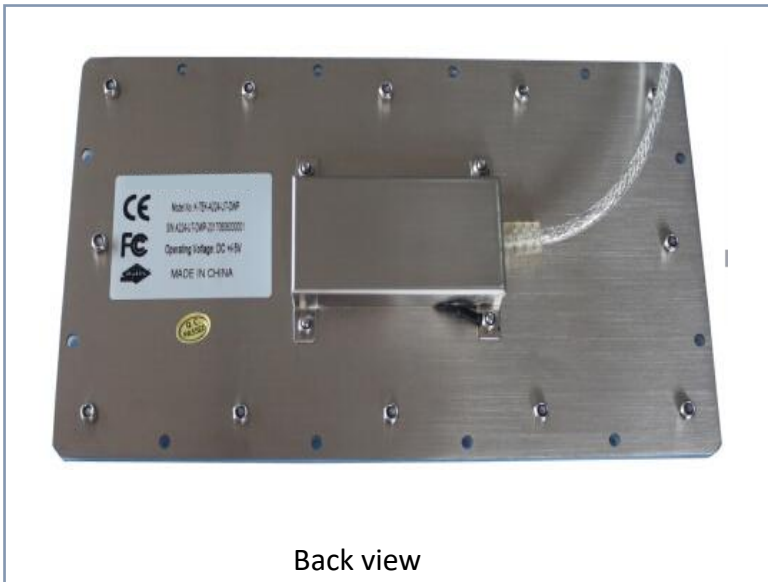

Back view



K-TEK-B210-UT-DWP

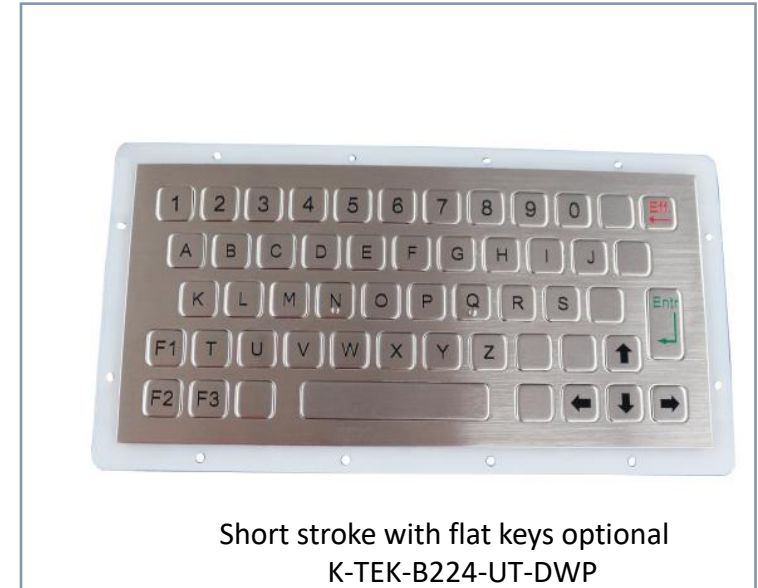

Short stroke with flat keys optional
K-TEK-B224-UT-DWP




- Sealing to IP67, 68Keys
- Robust design, vandal proof structure
- An excellent tactile feeling for fast data input
- SUS304 Brushed stainless steel surface
- FN+Clean key to lock keyboard when cleaning
- Rear panel mount with mounting holes
- Customized layout available

IP Grade	IP67
Interfaces	USB/PS2
Key travel	2.0mm
Switch life	5 million
Dimension	272.0mm x 105.0 mm (Front panel)


Alternatives




Back view

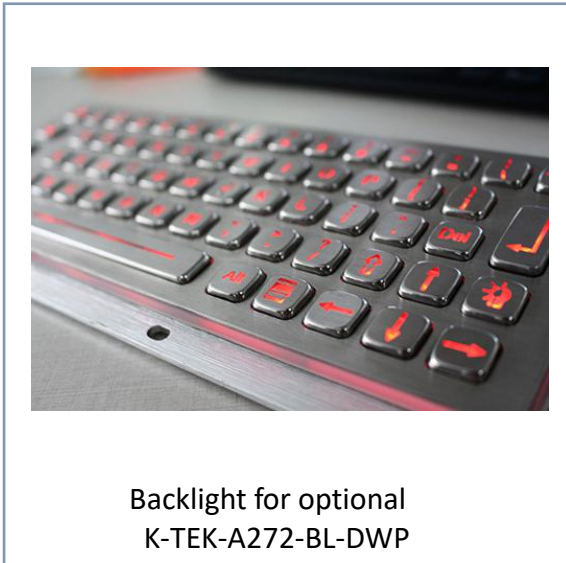

Backlight for optional
K-TEK-A272-BL-DWP

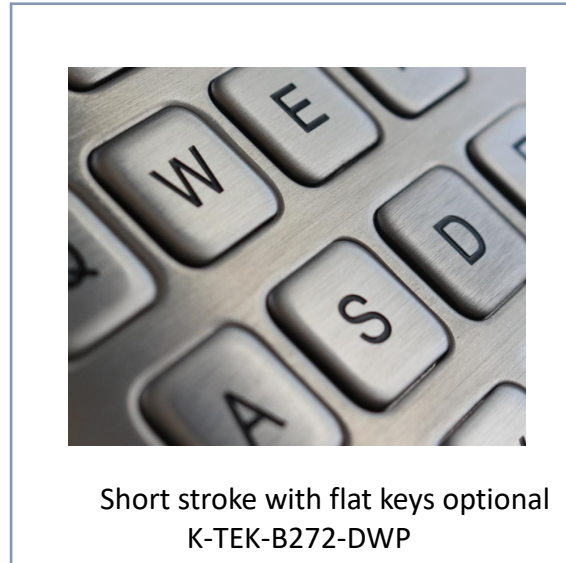


Short stroke with flat keys optional
K-TEK-B272-DWP

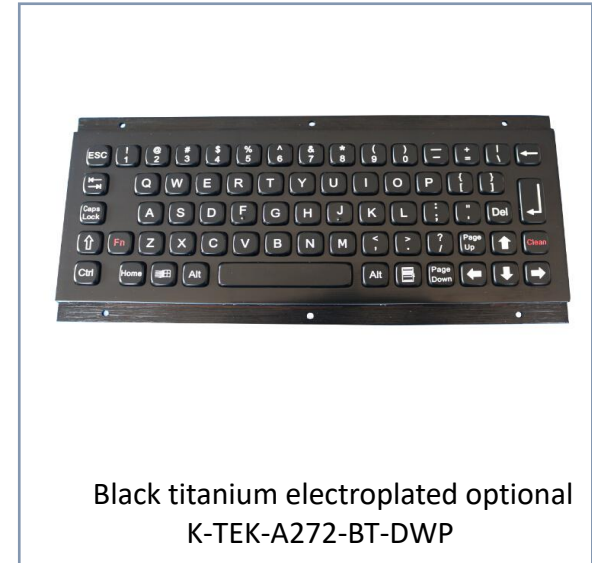

Black titanium electroplated optional
K-TEK-A272-BT-DWP

K-TEK-A290-FN-DWP

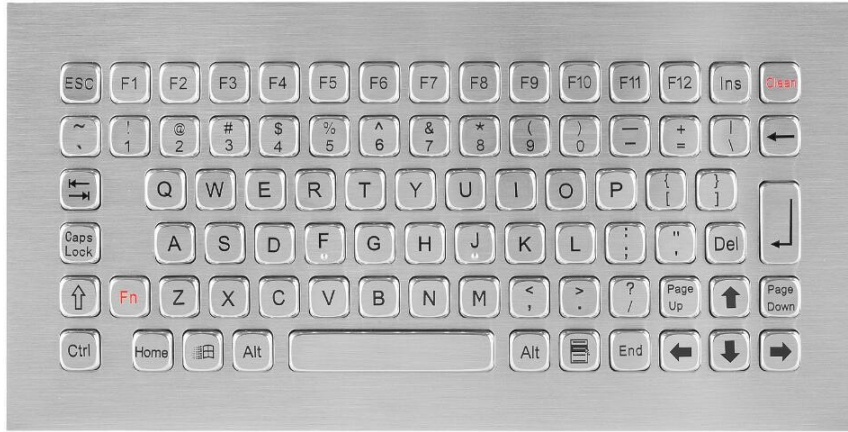


- Sealing to IP67, 81Keys
- Robust design, vandal proof structure
- SUS304 Brushed stainless steel surface
- F1,F2...F12 on top line of keyboard
- FN+Clean key to lock keyboard when cleaning
- Top panel mount with threaded bolts
- With tight water gasket
- Customized layout, braille dots available

IP Grade	IP67
Interfaces	USB/PS2
Key travel	2.0mm
Switch life	5 million
Dimension	290.0 mm x 145.0 mm (Front panel)


Alternatives



Back view

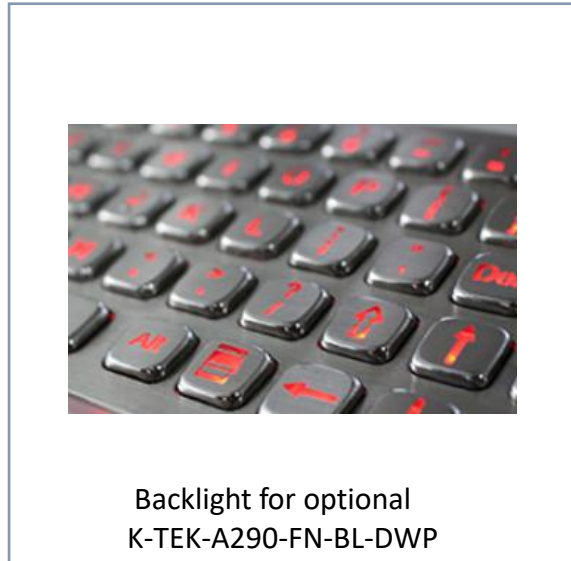

Backlight for optional
K-TEK-A290-FN-BL-DWP

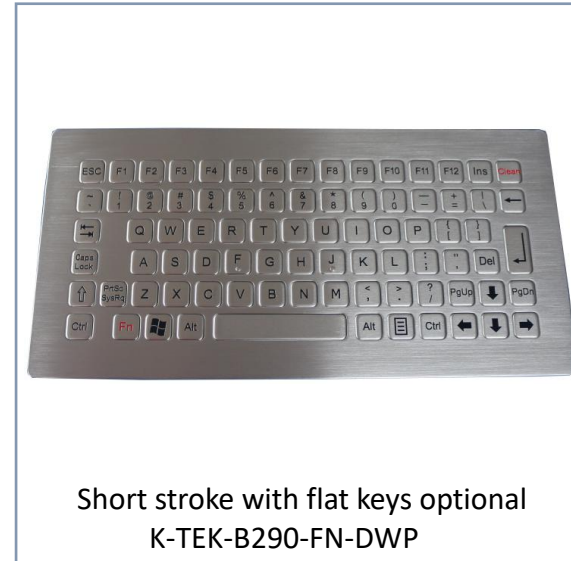

Short stroke with flat keys optional
K-TEK-B290-FN-DWP



Desktop version
K-TEK-A290-FN-DT-DWP



- Sealing to IP67,68Keys
- Robust design, vandal proof structure
- Stable and accurate data input
- SUS304 Brushed stainless steel surface
- FN+Clean key lock keyboard when cleaning
- Rear panel mount with mounting holes
- Customized layout available

IP Grade	IP67
Interfaces	USB/PS2
Key travel	0.45mm
Switch life:	1 million
Dimension	210.0mm x 90.0mm (Front panel)

Alternatives






- Sealing to IP67, 81Keys
- Robust design, vandal proof structure
- Combination FN keys included
- SUS304 Brushed stainless steel surface
- With numeric keypad integrated
- FN+Clean key lock keyboard when cleaning
- Top panel mount with threaded bolts
- Customized layout available

IP Grade	IP67
Interfaces	USB/PS2
Key travel	0.45mm
Switch life:	1 million
Dimension	340.0mm x 125.0mm (Front panel)

Alternatives

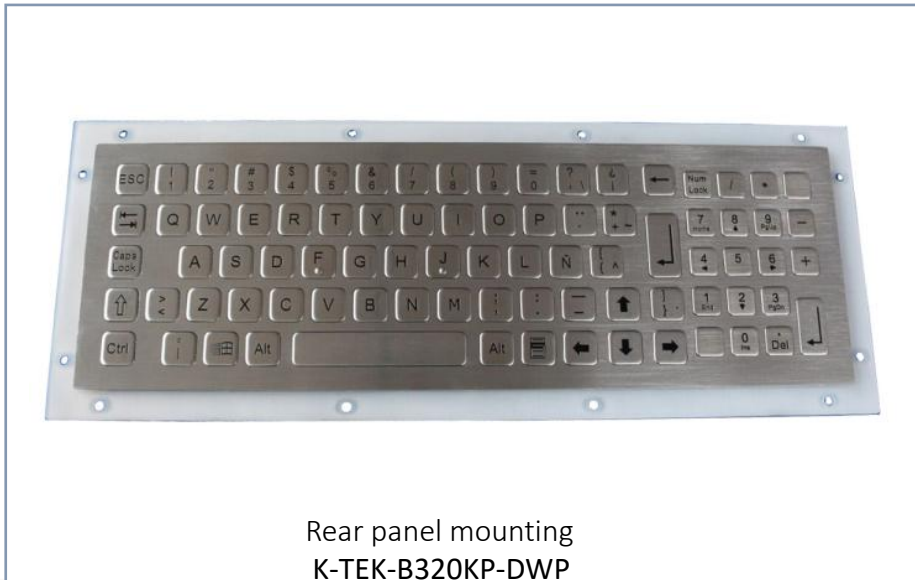

Rear panel mounting
K-TEK-B320KP-DWP




Desktop Version
K-TEK-B340KP-DT-DWP



- Sealing to IP67, 102Keys
- Robust design, vandal proof structure
- An excellent tactile feeling for fast data input
- SUS304 Brushed stainless steel surface
- With numeric pad and FN keys integrated
- With waterproof gasket
- Rear panel mount with mounting holes
- Customized layout and backlight color available

IP Grade	IP67
Interfaces	USB/PS2
Key travel	2.0mm
Switch life:	5 million
Dimension	340.0mm x 125.0mm (Front panel)


Alternatives

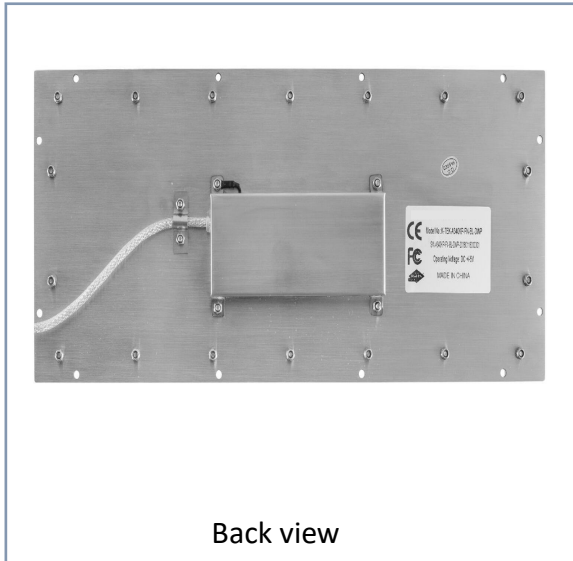

Back view



Backlight for optional
K-TEK-A340KP-FN-BL-DWP

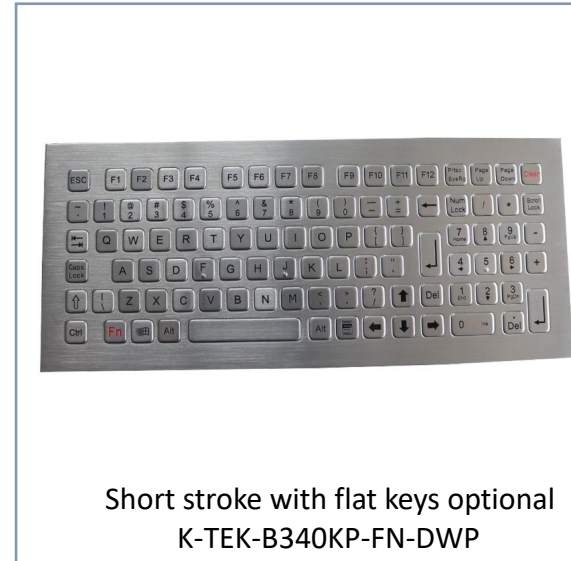

Short stroke with flat keys optional
K-TEK-B340KP-FN-DWP





Desktop version
K-TEK-A360KP-FN-DT-DWP



- Sealing to IP67, 111Keys
- Robust design, vandal proof structure
- An excellent tactile feeling for fast data input
- SUS304 Brushed stainless steel surface
- With numeric pad and FN keys integrated
- Rear panel mount with mounting holes
- Customized layout available

IP Grade	IP67
Interfaces	USB/PS2
Key travel	2.0mm
Switch life:	5 million
Dimension	396.0mm x 125.0mm (Front panel)

Alternatives

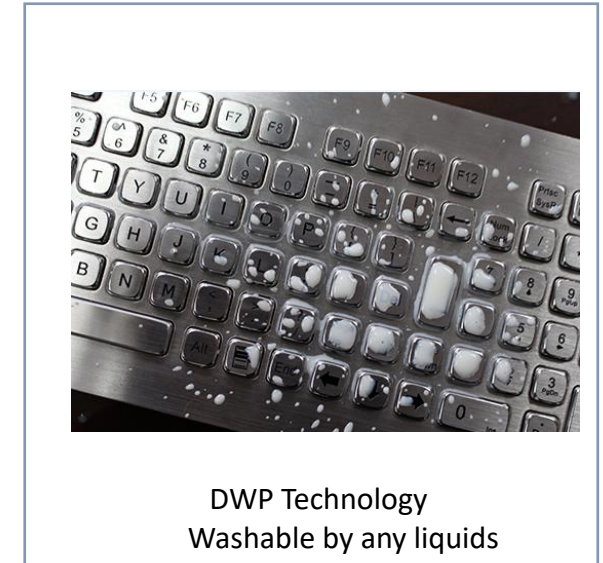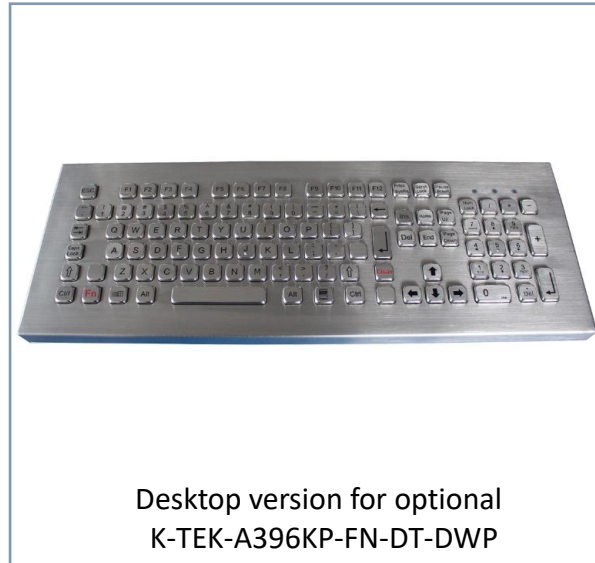

K-TEK-A343-OTB-DWP



- Sealing to IP67, 71Keys
- Robust design, vandal proof structure
- An excellent tactile feeling for fast data input
- SUS304 Brushed stainless steel surface
- With IP68 optical trackball at 800DPI
- With waterproof gasket
- Rear panel mount with mounting holes
- Customized layout available

IP Grade	IP67
Interfaces	USB/PS2
Key travel	2.0mm
Switch life	5 million
Dimension	343.0mm x 105.0mm(Front panel)

Alternatives



Hula pointer version K-TEK-A343-DHP-DWP



Black titanium electroplated on SS surface optional
K-TEK-A343-OTB-BT-DWP



Touchpad version available
K-TEK-A343TP-DWP




Mountable desktop version
K-TEK-A343-MTB-MDT-DWP



- Sealing to IP67, 71Keys
- Robust design, vandal proof structure
- An excellent tactile feeling for fast data input
- SUS304 Brushed stainless steel surface
- With IP68 optical trackball at 800DPI
- With waterproof gasket
- Top panel mount with threaded bolts
- Customized layout available

IP Grade	IP67
Interfaces	USB/PS2
Key travel	2.0mm
Switch life	5 million
Dimension	361.0mm x 125.0mm(Front panel)

Alternatives

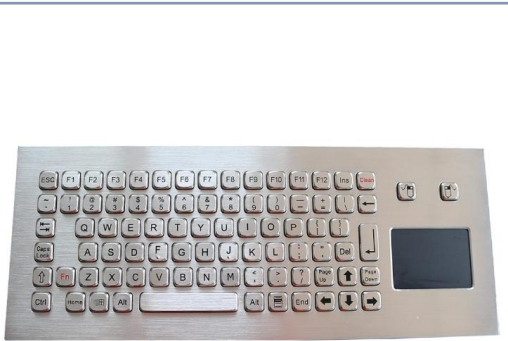

K-TEK-A361TP-FN-DWP



Black titanium electroplated on
SS surface optional
K-TEK-A361-OTB-FN-BT-DWP



With FN keys optional
K-TEK-A361-OTB-FN-DWP



Desktop version optional
K-TEK-A361-OTB-FN-DT-DWP




- Sealing to IP67, 71Keys
- Robust design, vandal proof structure
- Stable and accurate data input
- SUS304 Brushed stainless steel surface
- With IP68 optical trackball at 800DPI
- With waterproof gasket
- Top panel mount with threaded bolts
- Customized layout available

IP Grade	IP67
Interfaces	USB/PS2
Key travel	0.45mm
Switch life	1 million
Dimension	361.0mm x 125.0mm(Front panel)


Alternatives



Back view

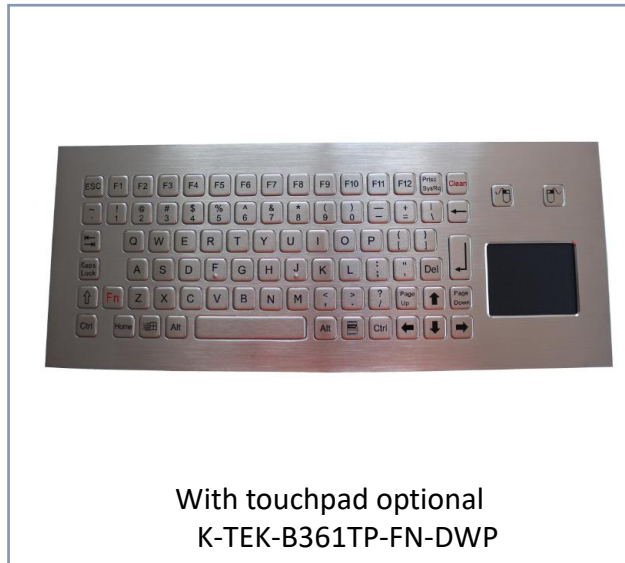

With touchpad optional
K-TEK-B361TP-FN-DWP

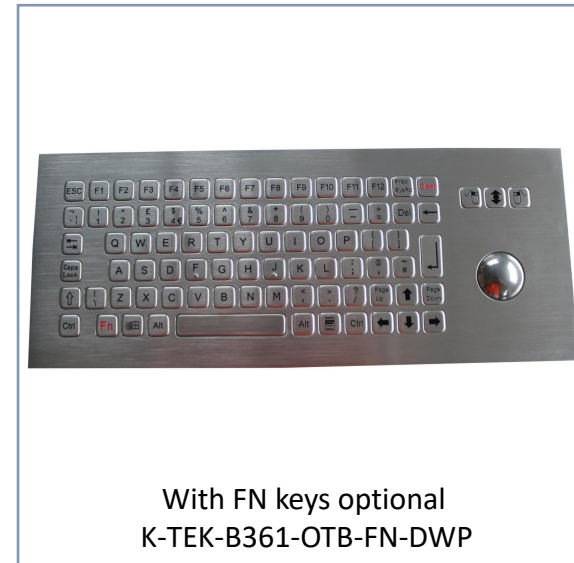

With FN keys optional
K-TEK-B361-OTB-FN-DWP




Desktop version optional
K-TEK-B361-OTB-FN-DT-DWP



- Sealing to IP67, 90Keys
- Robust design, vandal proof structure
- An excellent tactile feeling for fast data input
- SUS304 Brushed stainless steel surface
- With F1,F2....F12 function keys
- With IP68 optical trackball at 800DPI
- With waterproof gasket
- Rear panel mount with mounting holes
- Customized layout available

IP Grade	IP67
Interfaces	USB/PS2
Key travel	2.0mm
Switch life	5 million
Dimension	392.0mm x 135.0mm(Front panel)

Alternatives

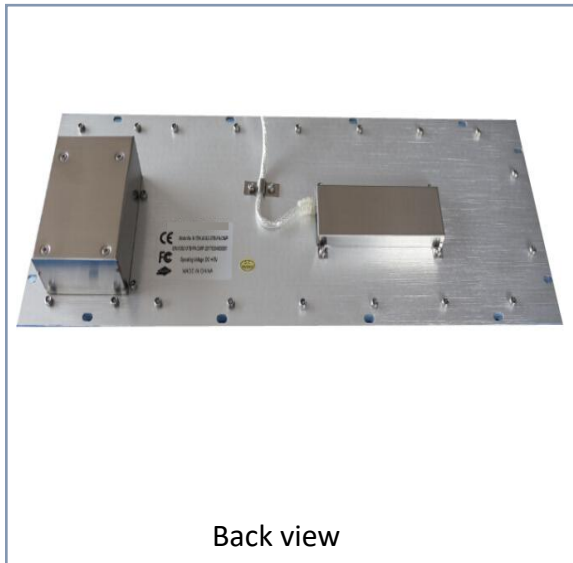

Back view



Without FN keys optional
K-TEK-A392-OTB-DWP




K-TEK-A392TP-FN-DWP



- Sealing to IP67, 75Keys
- Robust design, vandal proof structure
- An excellent tactile feeling for fast data input
- SUS304 Brushed stainless steel surface
- With IP68 optical trackball at 800DPI
- With waterproof gasket
- Top panel mount with threaded bolts
- Customized layout available

IP Grade	IP67
Interfaces	USB/PS2
Key travel	2.0mm
Switch life	5 million
Dimension	400.0mm x 124.0mm(Front panel)

Alternatives

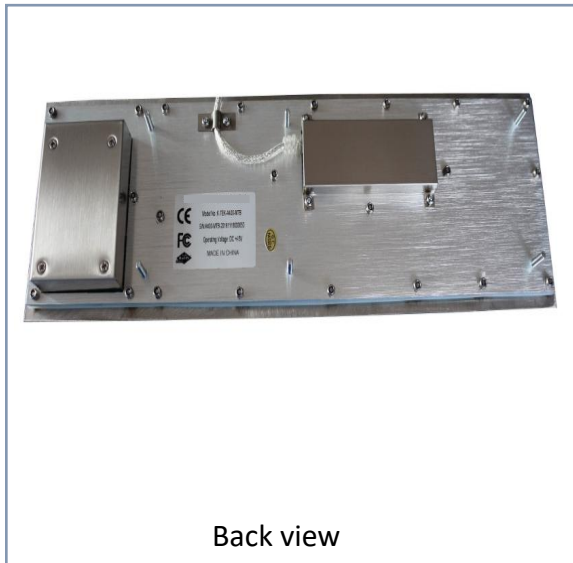

Back view



With touchpad optional
K-TEK-A400TP-DWP



Desktop /Mountable desktop version
K-TEK-A400-OTB-DT-DWP
K-TEK-A400-OTB-MDT-DWP

K-TEK-A420-OTB-KP-FN-DWP



- Sealing to IP67, 104Keys
- Robust design, vandal proof structure
- SUS304 Brushed stainless steel surface
- With F1,F2....F12 function keys
- With numeric keypad
- With IP68 optical trackball at 800DPI
- With waterproof gasket
- Top panel mount with threaded bolts
- Customized layout available

IP Grade	IP67
Interfaces	USB/PS2
Key travel	2.0mm
Switch life	5 million
Dimension	420.0mm x 145.0mm(Front panel)

Alternatives

With touchpad version available
K-TEK-A420TP-KP-FN-DWP

Short stroke with flat keys optional
K-TEK-B420-OTB-KP-FN-DWP

Short stroke with flat keys and touchpad
K-TEK-B420TP-KP-FN-DWP


K-TEK-A380-50-MTB-FN



- Sealing to IP65, 80Keys
- Robust design, vandal proof structure
- An excellent tactile feeling for fast data input
- SUS304 Brushed stainless steel surface
- With IP65 50mm mechanical trackball at 400DPI
- Top panel mount with threaded bolts
- Customized layout available

IP Grade	IP65
Interfaces	USB/PS2
Key travel	2.0mm
Switch life	5 million
Dimension	380.0mm x 145.0mm(Front panel)

Alternatives

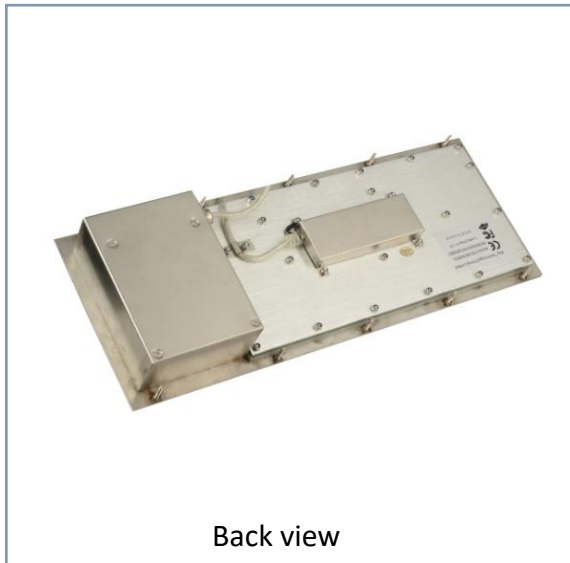

Back view



Close-up pic for trackball



Desktop /Mountable desktop version
 K-TEK-A380-50-MTB-FN-DT
 K-TEK-A380-50-MTB-FN-MDT




- Sealing to IP65, 66Keys
- Robust design, vandal proof structure
- An excellent tactile feeling for fast data input
- SUS304 Brushed stainless steel surface
- Rear panel mount with mounting holes
- Customized layout available
- Red or blue backlit color optional

IP Grade	IP65
Interfaces	USB/PS2
Key travel	2.0mm
Switch life	5 million
Dimension	272.0mm x 105.0 mm (Front panel)


Alternatives




Back view

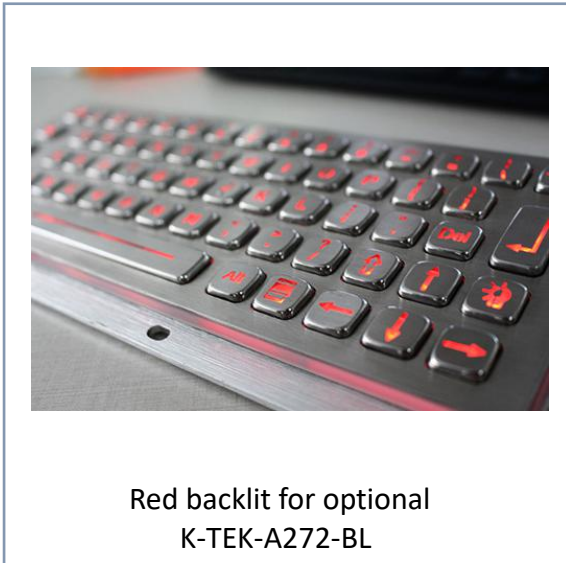

Red backlit for optional
K-TEK-A272-BL

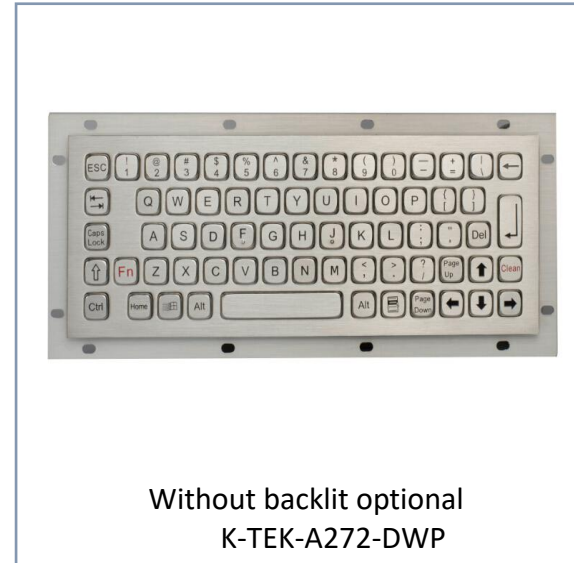

Without backlit optional
K-TEK-A272-DWP

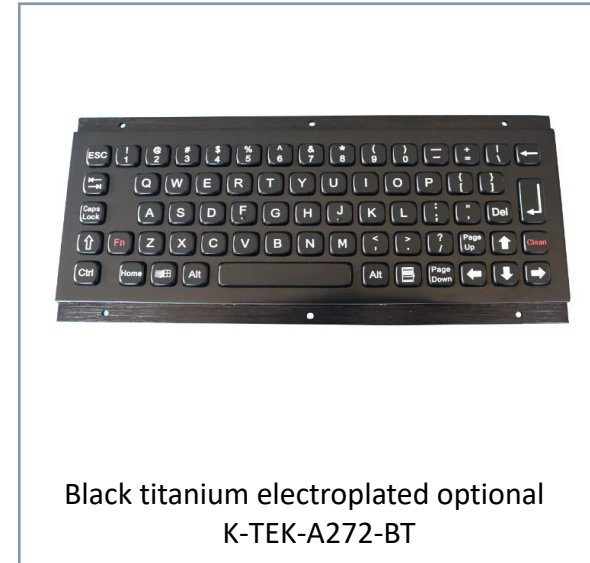

Black titanium electroplated optional
K-TEK-A272-BT



- Sealing to IP65, 87Keys
- Robust design, vandal proof structure
- An excellent tactile feeling for fast data input
- SUS304 Brushed stainless steel surface
- F1,F2.....F12 keys on upper line
- Standard red backlit included
- Top panel mount with threaded bolts
- Customized layout available

IP Grade	IP65
Interfaces	USB/PS2
Key travel	2.0mm
Switch life:	5million
Dimension	308.0mm x 145.0mm (Front panel)

Alternatives



Back view



Without backlit for optional
K-TEK-A308-FN



Desktop Version
K-TEK-A308-FN-BL-DT



- Sealing to IP67, 69 keys
- Integrated with IP68 38mm optical trackball
- With adjustable blue industrial backlight included
- Rear panel mount solution with mounting holes
- Black titanium electroplated on front SS plate and keys
- Combination 12 FN keys on top line

IP Grade	IP67
Interfaces	USB/PS2
Key travel	2.0mm
Switch life	5 million
Dimension	343.0mm x 105.0mm (top panel)

Alternatives



Back veiw



K-TEK-A343TP-BL-DWP



K-TEK-A343-OTB-BT-DWP





K-TEK-A343-OTB-DWP



- Sealing to IP67, 70 Keys
- Robust design, vandal proof structure
- An excellent tactile feeling for fast data input
- SUS304 Brushed stainless steel surface
- Integrated with sealed and tough touchpad
- Top panel mount with threaded bolts
- With waterproof gasket
- Customized layout and backlight color available

IP Grade	IP67
Interfaces	USB/PS2
Key travel	2.0mm
Switch life	5 million
Dimension	361.0mm x 125.0mm (top panel)

Alternatives

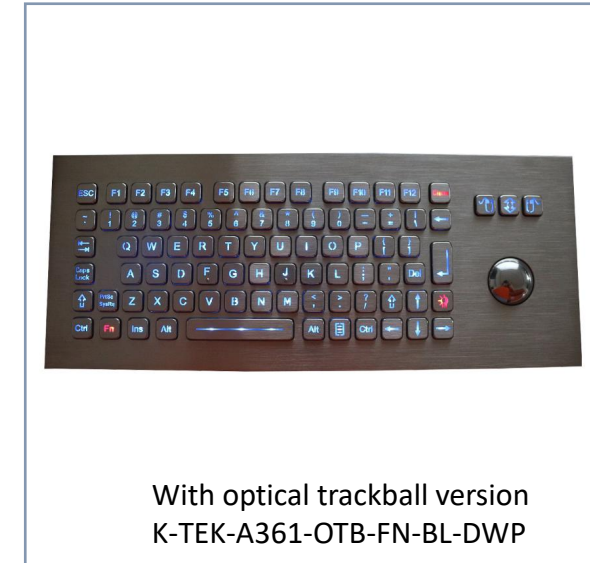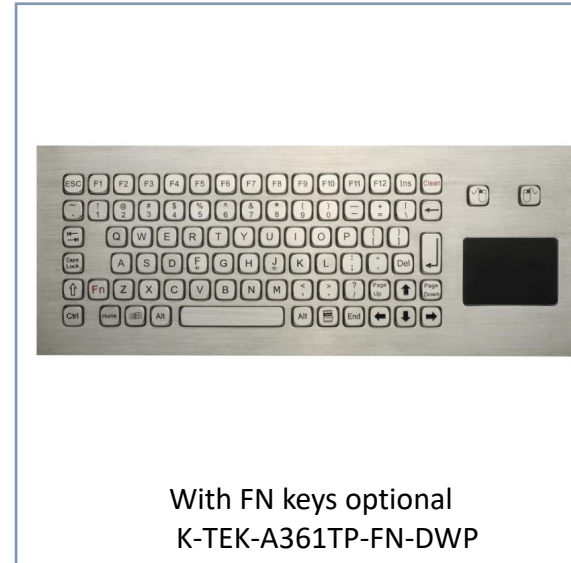



- Sealing to IP67, 71 Keys
- Ultra thin design
- With 25mm optical trackball at 800DPI
- Red/blue/white/green backlit optional
- Short stroke for stable and accurate data input
- Rear panel mount with mounting holes
- With waterproof gasket
- Customized layout available

IP Grade	IP67
Interfaces	USB/PS2
Key travel	0.45mm
Switch life:	1 million
Dimension	255.0mm x 90.0mm(Front panel)


Alternatives



Back view



With FN keys integrated
K-TEK-B255-OTB-FN-DWP

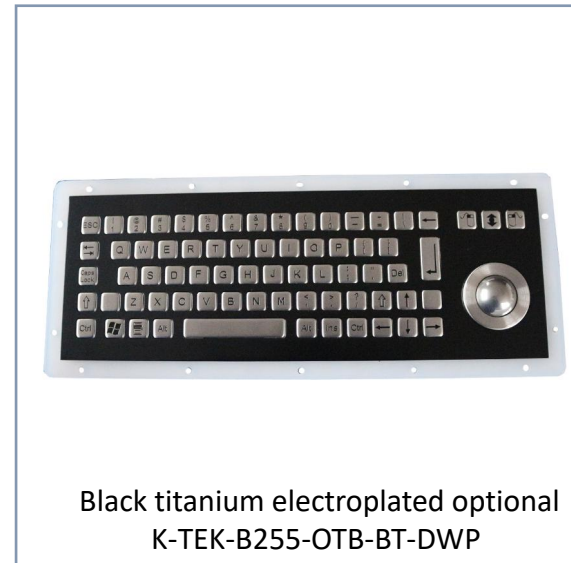

Black titanium electroplated optional
K-TEK-B255-OTB-BT-DWP




Without backlight version
K-TEK-B255-OTB-DWP




- Sealing to IP67, 68Keys
- Ultra thin, thickness 7.4mm only
- Integrated with sealed and tough touchpad
- Red/blue/white/green backlit optional
- Short stroke for stable and accurate data input
- Rear panel mount with mounting holes
- With waterproof gasket
- Customized layout available

IP Grade	IP67
Interfaces	USB/PS2
Key travel	0.45mm
Switch life:	1 million
Dimension	255.0mm x 90.0mm(Front panel)

Alternatives

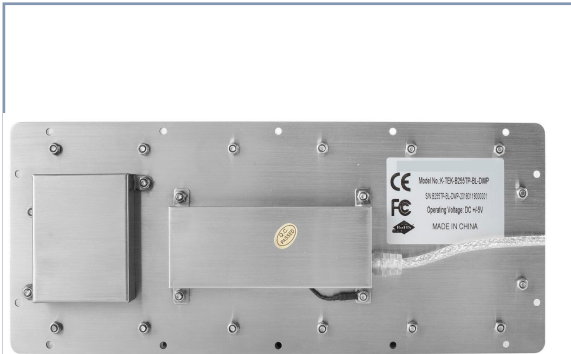

Back view

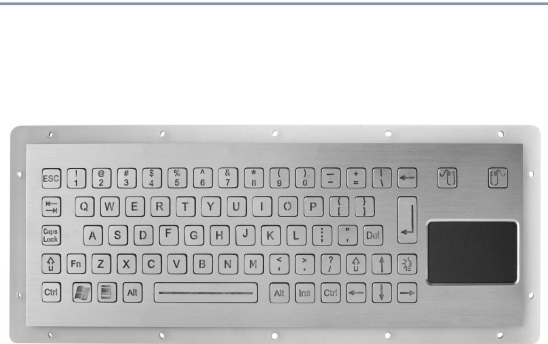

Non-backlit optional
K-TEK-B255TP-UT-DWP



Black titanium electroplated optional
K-TEK-B255TP-UT-BT-DWP



DWP Technology
Washable by any liquid

K-TEK-B312-OTB-KP-FN-BL-DWP



- Sealing to IP67, 104 Keys
- With numeric keypad and FN keys
- With IP68 25mm optical trackball at 800DPI
- Red/blue/white/green backlit optional
- Short stroke for stable and accurate data input
- Rear panel mount with mounting holes
- With waterproof gasket
- Customized layout available

IP Grade	IP67
Interfaces	USB/PS2
Key travel	0.45mm
Switch life:	1 million
Dimension	312.0mm x 105.0mm(Front panel)

Alternatives



Back view



Non-backlit for optional
K-TEK-B312-OTB-KP-FN-DWP




K-TEK-B312TP-KP-FN-BL-UT-DWP



- Sealing to IP67, 83Keys
- With FN keys (F1,F2....F12)
- Red/blue/white/green backlit optional
- Integrated with sealed and tough touchpad
- Short stroke for stable and accurate data input
- Top panel mount with threaded studs
- With waterproof gasket
- Customized layout and backlight color available

IP Grade	IP67
Interfaces	USB/PS2
Key travel	0.45mm
Switch life:	1 million
Dimension	361.0mm x 145.0mm(Front panel)

Alternatives

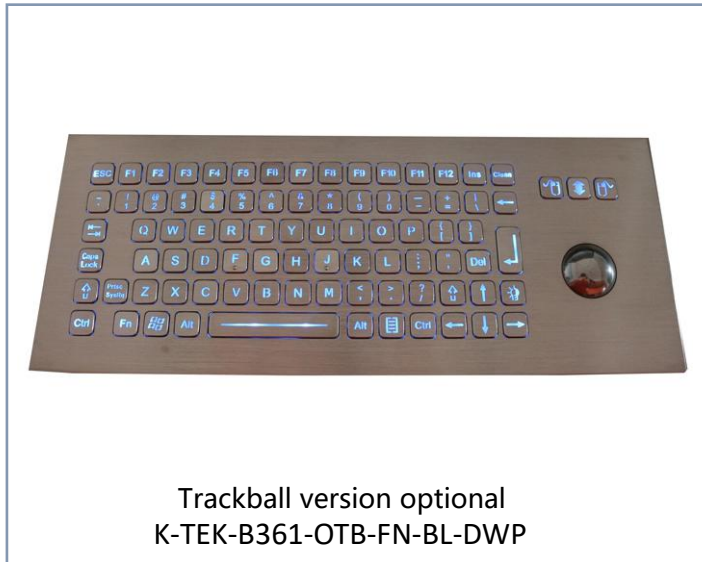




- Sealing to IP65, 69Keys
- Robust design, vandal proof structure
- An excellent tactile feeling for fast data input
- SUS304 Brushed stainless steel surface
- With IP65 chameleon trackball at 400DPI
- Rear panel mount with mounting holes
- Customized layout and backlight color available

IP Grade	IP65
Interfaces	USB/PS2
Key travel	2.0mm
Switch life	5 million
Dimension	343.0mm x 105.0mm (Front panel)

Alternatives

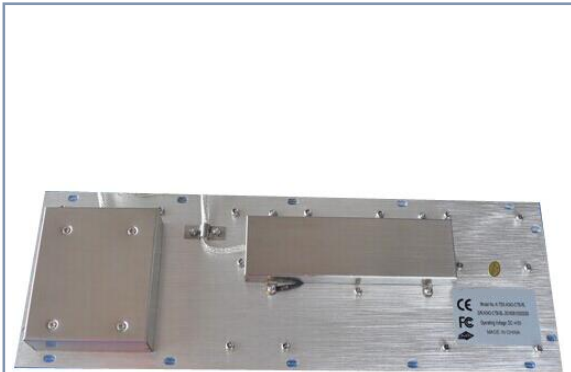

Back veiw



IP68 Optical trackball at 800DPI optional
K-TEK-A343-OTB-BL



Black titanium electroplated optional
K-TEK-A343-CTB-BL-BT




Touchpad version for optional
K-TEK-A343TP-BL



- Sealing to IP65, 84Keys
- Robust design, vandal proof structure
- An excellent tactile feeling for fast data input
- SUS304 Brushed stainless steel surface
- With numeric keypad
- With IP65 chameleon trackball at 400DPI
- Rear panel mount with mounting holes
- Customized layout available

IP Grade	IP65
Interfaces	USB/PS2
Key travel	2.0mm
Switch life	5 million
Dimension	392.0mm x 110.0mm (Front panel)

Alternatives

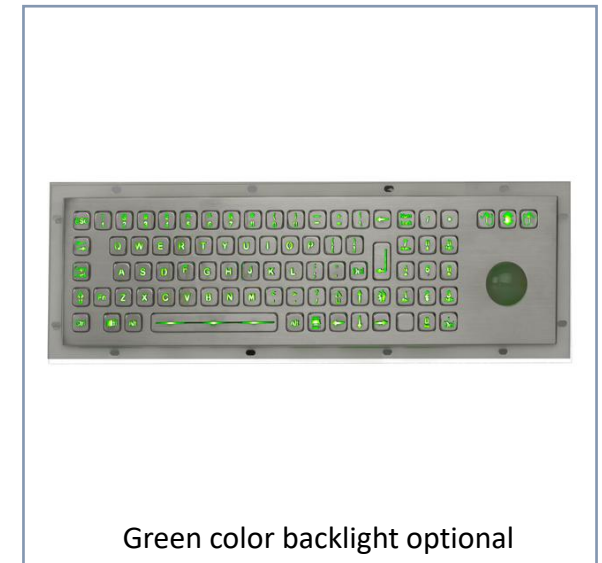

Vehicle-mounted Keyboards

Factory's Vehicle-mounted Keyboards are mainly targeted for vehicle applications.

Features as below:

- Integrated with ruggedized tough touchpad
- With 12 FN keys
- Scissors switch/Optical axis key switch/Membrane key switch technology with long-life span for fast and accurate data input
- With adjustable RED/WHITE backlight included
- With FN+Clean keys to freeze keyboard when cleaning
- Mountable super flat desktop version with robust ABS polycarbonate case with VESA/APMS mounting holes
- Wired or bluetooth version optional
- Working Temperature of -20°C to +60°C







- IP68 ruggedized plastic vehicle keyboard
- With IP65 rated tough and sealed touchpad
- Optical axis key switch technology
- Fast and light typing experiences
- Integrated with a tough touchpad
- Accurate cursor position
- FN+Clean keys to freeze keyboard when cleaning
- Adjustable white backlit included
- High and low operation temperature compatibility
- Mountable super flat desk top version

IP Grade	IP68
Interfaces	USB/PS2
Key travel	3.0mm
Backlit color	White
Dimension	295.40mm x 198.00mm x 25.00mm

Alternatives

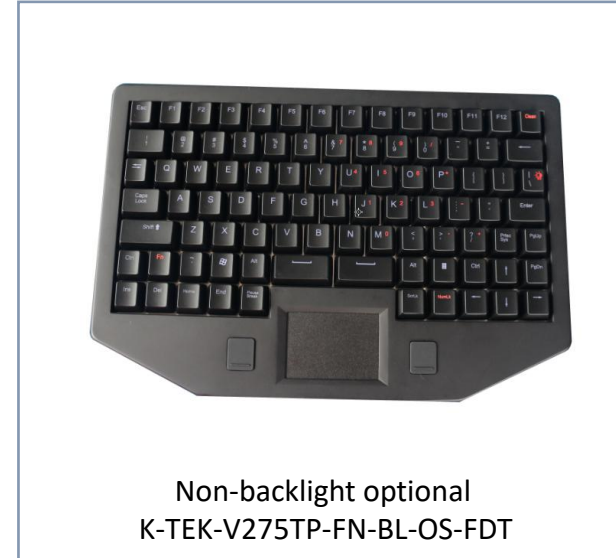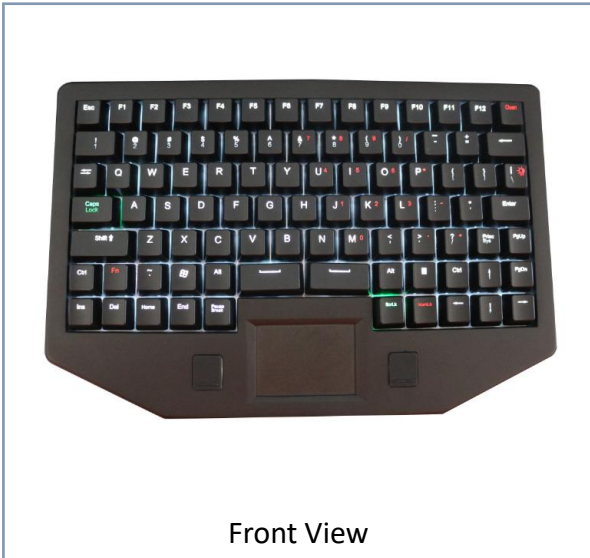



- IP65 ruggedized plastic vehicle keyboard with touchpad
- Scissors switch technology with light typing experience
- FN+Clean keys to freeze keyboard when cleaning
- Adjustable white or red backlit included
- Drain hole on the back to prevent damage of liquids
- Mountable flat desk top with VESA/APMS holes
- Panel mounted version available
- Ease of customized languages
- Working temperature: -20° C to +60° C

IP Grade	IP65
Interfaces	USB/Bluetooth
Key travel	1.2mm
Backlit color	White/Red
Dimension	297.50mm x 192.00mm x 22.50mm

Alternatives



Bluetooth version



Rectangular desktop version



Panel mount version



Desktop version back view



- IP65 ruggedized plastic vehicle keyboard with touchpad
- Scissors switch technology
- Fast and light typing experience
- Accurate cursor position
- FN+Clean keys to freeze keyboard when cleaning
- Adjustable white or red backlit included
- Top panel mounted version, desktop version optional
- Customized layouts available
- Working temperature: -20° C to +60° C

IP Grade	IP65
Interfaces	USB/Bluetooth
Key travel	1.2mm
Backlit color	White/Red
Dimension	285.0mm x 179.69mm x 6.0mm

Alternatives




Bluetooth version



White backlight



Desktop version

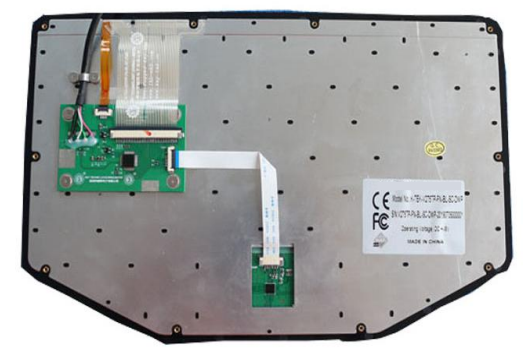

Back View



- IP65 ruggedized plastic vehicle keyboard
- With IP65 rated tough and sealed touchpad
- Scissors switch technology
- Fast and light typing experience
- Meet MIL-STD-461G and MIL-STD-810F
- FN+Clean keys to freeze keyboard when cleaning
- Adjustable white or red backlit included
- Drain hole on the back to prevent damage of liquids
- Mountable flat desk top version with VESA/APMS holes

IP Grade	IP65
Interfaces	USB/Bluetooth
Key travel	1.2mm
Backlit color	White/Red
Dimension	297.5mm x 192.0mm x 22.5mm


Alternatives



Bluetooth version



White backlight

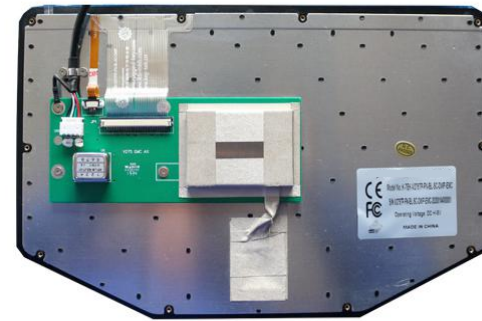

Panel mount version



Desktop version back view

K-TEK-M275TP-FN-BL-MS-FDT



- IP68 ruggedized silicone rubber vehicle keyboard
- With IP65 rated tough and sealed touchpad
- Industrial membrane key switch technology
- FN+Clean keys to freeze keyboard when cleaning
- Adjustable red backlit included
- Durable-coating for mechanical & chemical resistance
- VESA mountable super flat desk top version
- Red backlight included for dim condition

Ruggedized Rubber Keyboard

IP Grade	IP68
Interfaces	USB/PS2
Key travel	1.2mm
Backlit color	Red
Dimension	295.00mm x 191.03mm x18.55mm

Alternatives



Front View



Back View



Red backlight scissors switch version
K-TEK-V275TP-FN-BL-SC-FDT

Medical Antimicrobial Waterproof Rubber Mice/Keyboards

The factory's silicone rubber Mice/keyboards are designed for hospital systems, medical offices, dental and laboratories etc. These kind of mice/keyboards can prevent spreading illness to medical staff and patients because of its antimicrobial material and waterproof design.

Features as below:

- Easy to clean
- Used with gloves for medical staff
- Hygienic white color(black optional) to let users know when should be disinfected
- Durable coating & anti-microbial keyboard surface withstands to most chemicals and liquids
- Wide operation temperature from $-20^{\circ}\text{C} \sim +60^{\circ}\text{C}$
- Backlit optional for dim working environment
- FN + CLEAN keys to lock the keyboard during cleaning process
- Totally sealed with one-piece rubber to meet IP68 waterproof
- Can be tailored with or without touchpad/trackball
- Panel mount or desktop version for your choice
- Customized layout available
- Certified to IEC60601-1-2





- Sealing to IP68
- Optical mouse for fast moving
- Antimicrobial surface withstand to most chemicals/liquid
- 5-buttons designed for right & left clicking
- and scrolling up and down
- Black or white color optional

IP Grade	IP68
Interfaces	USB/PS2
Diameter	/
Mouse buttons	5
Dimension	64.0mm x 126.0mm x 34.0mm (L x W x H)

Close-up



Back view of the item



Combo keyboard K-TEK-M399KP-FN-DT



- Sealing to IP68
- Optical mouse for fast moving
- Antimicrobial surface withstand to most chemicals/liquid
- 5-buttons designed for right & left clicking and scrolling up and down
- Black or white color optional

IP Grade	IP68
Interfaces	USB
Diameter	/
Mouse buttons	5
Dimension	103.5mm x 59.0mm x 36.5mm(L x W x H)

Alternatives



K-TEK-M64-OMS-DT



Combo medical keyboard K-TEK-M380KP-FN-BL-DT



- IP68 silicone wireless keyboard
- Antimicrobial hygienic material
- With F1,F2...F12 FN keys
- With mini wireless receiver integrated
- With numeric keys on right side
- Customized layout available
- Desktop version

IP Grade	IP68
Interfaces	Wireless
Color available	Black/White
Backlit color	Without
Dimension	378.0mm x 132.0mm x 10.0mm (L x W x H)


Alternatives



Back View



Mini wireless receiver

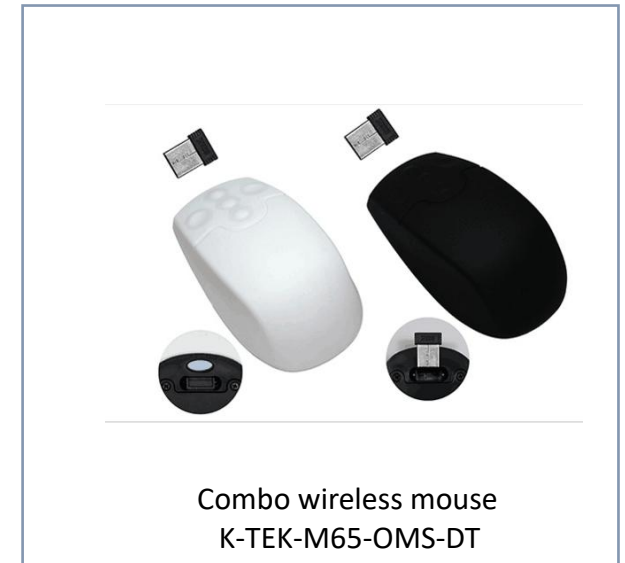

Combo wireless mouse
K-TEK-M65-OMS-DT

K-TEK-M343TP-FN-DT




- 92keys IP68 silicone keyboard
- Antimicrobial hygienic material
- With sealed and tough touchpad
- With F1,F2...F12 FN keys
- Customized layout available
- Backlight optional
- Desktop version

IP Grade	IP68
Interfaces	USB/PS2
Color available	Black/White
Key type	1.5mm long stroke
Dimension	343.0mm x 228.0mm x 10.0mm (L x W x H)

Alternatives



Back View

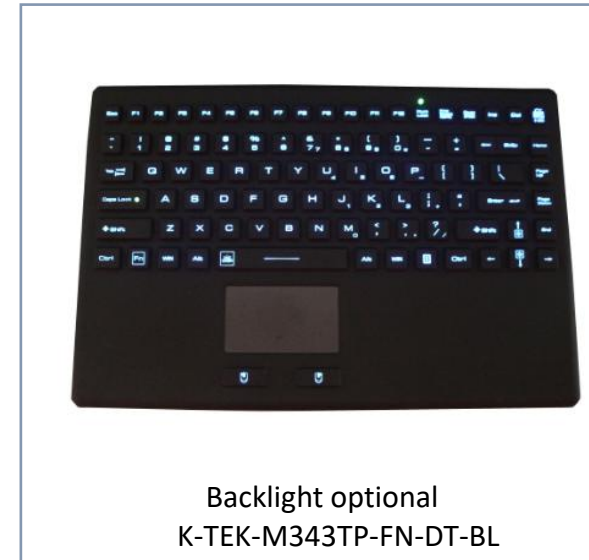

Backlight optional
K-TEK-M343TP-FN-DT-BL


K-TEK-M382TP-FN-DT-BL



- IP68 silicone rubber keyboard
- Antimicrobial hygienic material
- With 12 FN keys
- Integrated with sealed touchpad
- Non-backlight version available
- Customized layout available
- Industrial level

Buttons	92
Interfaces	USB/PS2
Color available	Black/White
Backlit color	Blue
Dimension	382.0mm x 130.0mm x 11.0mm (L x W x H)

Alternatives

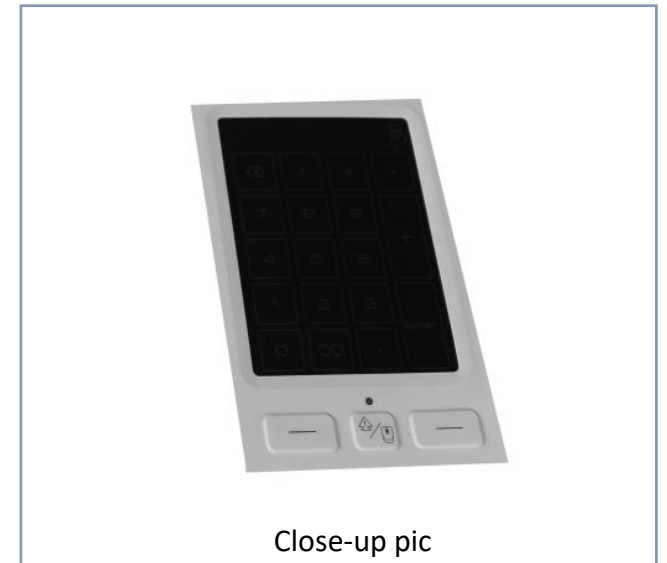

K-TEK-M375KP-FN-DT



- IP68 sealed and ruggedized rubber keyboard
- Antimicrobial hygienic material
- With 12 FN keys
- Customized layout available
- FN+Clean keys to freeze keyboard when cleaning
- Military level/Industrial level optional
- Ruggedized design with tough PCB

IP Grade	IP68
Interfaces	USB/PS2
Color available	Black/White
Key type	1.5mm long stroke
Dimension	379.0mm x 142.8mm x 15.5mm (L x W x H)

Alternatives



K-TEK-M380KP-FN-DT-BL



- IP68 silicone rubber keyboard
- With 12 FN keys
- Antimicrobial hygienic material
- With adjustable blue backlight
- Customized layout available
- Certified with IEC60601-1-2
- Desktop version

IP Grade	IP68
Interfaces	USB/PS2
Color available	Black/White
Backlit color	Blue
Dimension	380.0mm x 130.0mm x 10.0mm (L x W x H)

Alternatives



Back View



Black color optional



Combo mouse K-TEK-M67-OMS-DT

K-TEK-M399TP-KP-FN-DT



- IP68 ruggedized silicone rubber keyboard
- With IP65 rated tough touchpad
- Customized layout available
- FN+Clean to freeze keyboard when cleaning
- Antimicrobial material for medical or industrial application
- Backlight version optional
- Desktop version

IP Grade	IP68
Interfaces	USB/PS2
Color available	Black / White
Dimension	405.0mm x 155.0mm x 20.0mm (L x W x H)

Alternatives




Back View



Non-mouse optional
K-TEK-M399KP-FN-DT



With Red backlight optional
K-TEK-M399TP-KP-FN-DT-BL

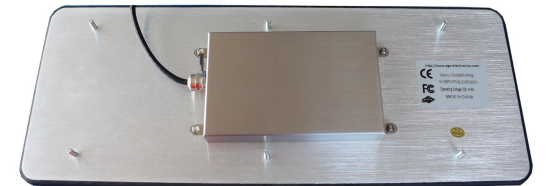



Panel mounting solution optional
K-TEK-M399TP-KP-FN



- IP67 ruggedized silicone rubber keyboard
- Customized layout available
- Clean key to freeze keyboard when cleaning
- Antimicrobial material for medical or industrial application
- Backlight version optional
- Panel mounted solution, desktop version optional

IP Grade	IP67
Interfaces	USB/PS2
Color available	Black / White
Dimension	405.0mm x 155.0mm (L x W)

Alternatives

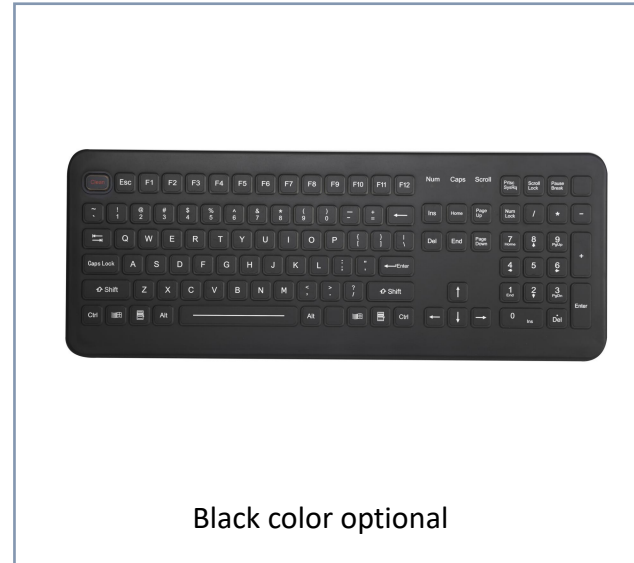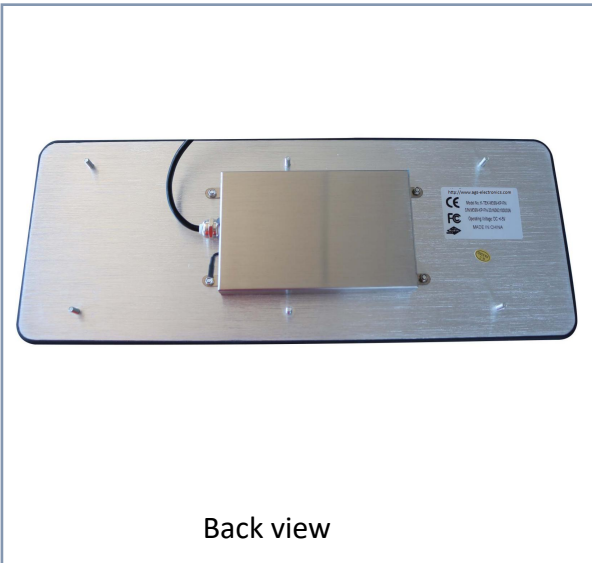

K-TEK-M369TP-KP-FN-DT-BL




- IP68 silicone rubber keyboard
- With 24 FN keys
- Blue or red backlight available
- Customized layout available
- Industrial level/medical level
- Desktop version
- Ease of customized languages

IP Grade	IP68
Interfaces	USB/PS2
Color available	Black/White
Backlit color	Blue/red
Dimension	369.0mm x 136.5mm x 10.5mm (L x W x H)


Alternatives



Back View

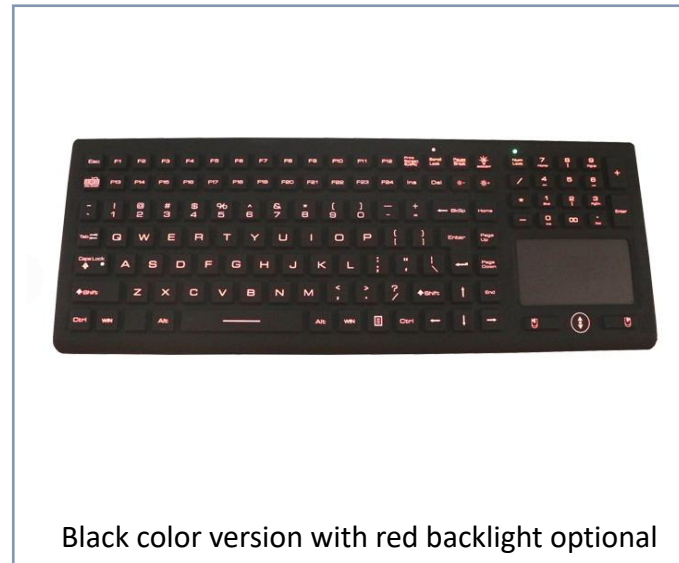

Black color version with red backlight optional

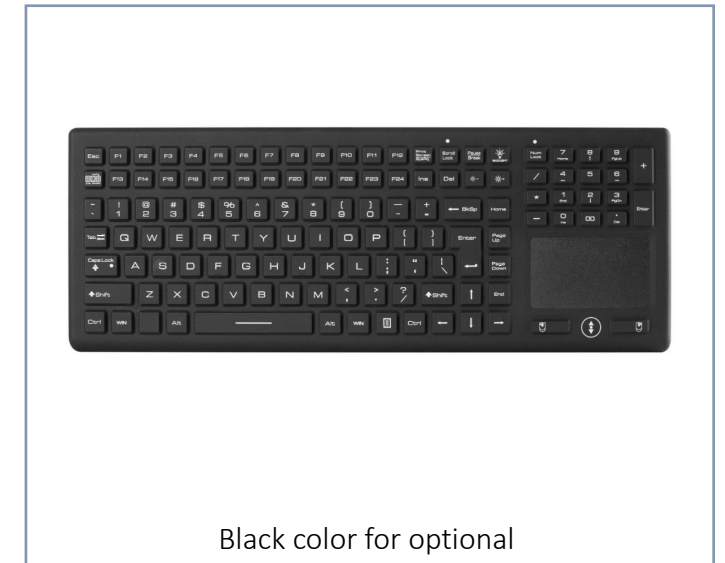

Black color for optional



K-TEK-M288-HP-FN-BL-DT



- IP68 silicone rubber keyboard
- With 10 FN keys
- With adjustable backlight
- With Rugged Force sensing resistor
- Customized layout available
- Desktop version

IP Grade	IP68
Interfaces	USB/PS2
Color available	Black/White
Backlit color	Blue
Dimension	288.0mm x 149.0mm x 10.0mm (L x W x H)

Alternatives

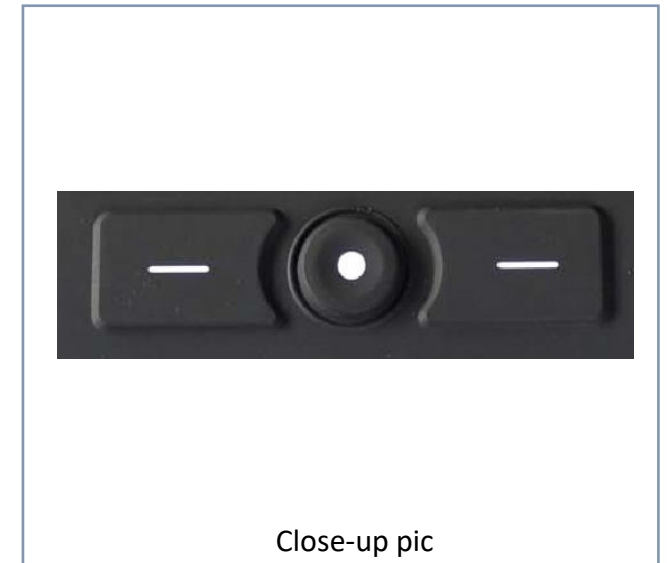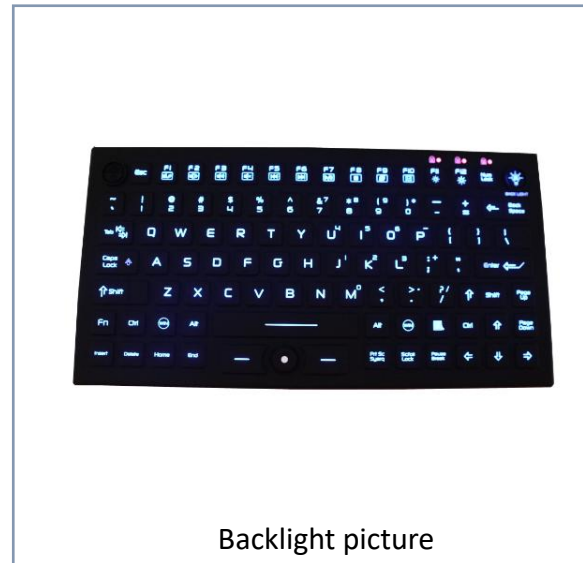

K-TEK-M408TP-KP-FN-DT




- IP68 silicone rubber keyboard
- With 12 FN keys
- Integrated with sealed touchpad
- Integrated with numeric keys
- Blue backlight version optional
- Customized layout available
- Industrial level
- Desktop version

Keys	109
Interfaces	USB
Color available	Black/White
Dimension	408.0mm x 138.0mm x 12.0mm (L x W x H)

Alternatives



Back View

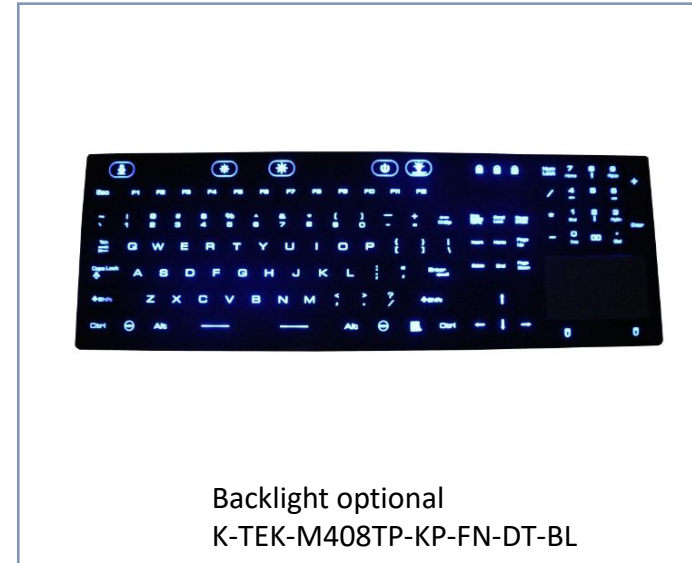

Backlight optional
K-TEK-M408TP-KP-FN-DT-BL

K-TEK-M415TP-FN-DT-WF

Ruggedized Silicone Rubber Keyboard



- IP68 silicone wireless keyboard
- With 12 FN keys
- With mini wireless receiver integrated
- Integrated with sealed touchpad
- Customized layout available
- Desktop version

Keys	110
Interfaces	Wireless
Color available	Black/White
Backlit color	NO
Dimension	415.0mm x 132.0mm x 10.0mm (L x W x H)

Alternatives



Back View



black color optional



Mini wireless receiver/Battery

Industrial/Military Level Ruggedized Silicone Rubber Mice/Keyboards

Factory's ruggedized military level silicone Mice/keyboards are EMC/EMI approved according to recognized military standards, which meets MIL-STD-461G with EMC (Electro Magnetic Compatibility) etc. & MIL-STD-810F (shock, vibration, humidity) etc. Detailed info:

Meet MIL-STD-461G with EMC (Electro Magnetic Compatibility) etc.:

CE101 25Hz - 10kHz Conducted Emissions, Audio Frequency Currents, Power leads

CE102 10kHz -10MHz Conducted Emissions, Radio Frequency Potentials, Power leads

CS101 25Hz - 150kHz Conducted Susceptibility, Power Leads

CS106 Conducted Susceptibility, Transients, Power Leads

CS112 Electrostatic Discharge Susceptibility

CS114 4kHz -400MHz Conducted Susceptibility, Bulk Cable injection

CS115 Conducted Susceptibility, Bulk Cable injection, Impulse Excitation

CS116 10kHz - 100MHz Conducted Susceptibility, Damped Sinusoidal Transients, Cables and Power Leads

RE101 25Hz -100kHz Radiated Emissions, Magnetic Field

RE102 10kHz - 18GHz Radiated Emissions, Electric Field

RS101 25Hz - 100kHz Radiated Susceptibility, Magnetic Field

RS103 10kHz - 40GHz Radiated Susceptibility, Electric Field

MIL-STD-810F (wide temperature, shock, vibration, humidity).

Features as below:

- Durable & fully sealed one-piece silicone cover
- EMC/EMI approved
- Force sensing resistor pointer/touchpad integrated
- Wide operation temperature from $-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$
- NVIS backlit optional
- Easy to integrate
- Dependability
- High electromagnetic compatibility
- Strong anti-interference ability
- Environmental adaptability
- High anti-vibration and impact resistance





- With 38mm mechanical trackball
- Meets MIL-STD-461G with EMC & MIL-STD-810F
- Adjustable white backlight included
- Fn keys on the top line for easy operation
- Top panel mount with 4 sinking holes
- Military level, Wide temperature of -40 to +60°C

IP Grade	keyboard: IP67 trackball: IP52
Interfaces	Aviation plug or USB
Keys	87 keys
Key life	5 millions
Dimension	465.0 mm*165.0mm (L x W)


Close-up



Back View



K-TEK-M134-38-MTB-AVB-151B

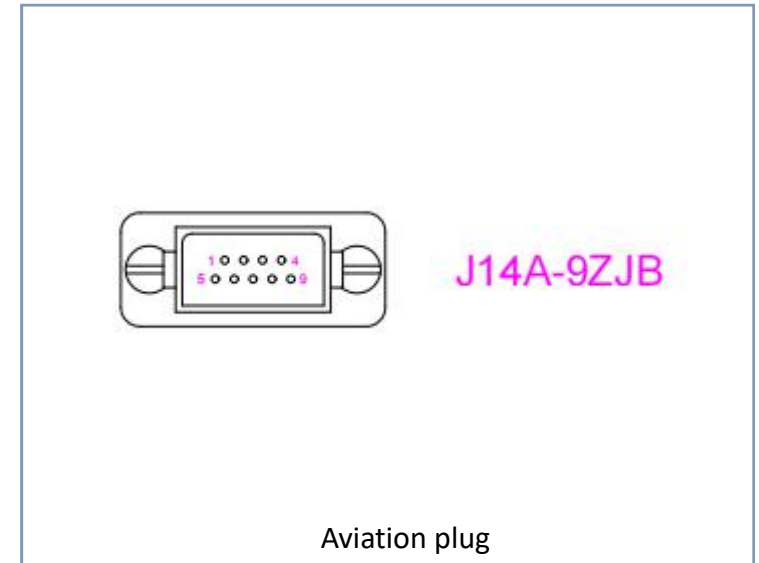


Aviation plug



- Sealing to IP67
- Adjustable industrial backlight for optional
- Fn keys on the top line for easy operation
- Military level, industrial level optional
- Rear panel mount with mounting holes
- Wide temperature of -40 to +80°C

IP Grade	IP67
Interfaces	USB/PS2
Keys	69 keys
Key life	5 millions
Dimension	182.5 mm*93.0mm (L x W)

Close-up

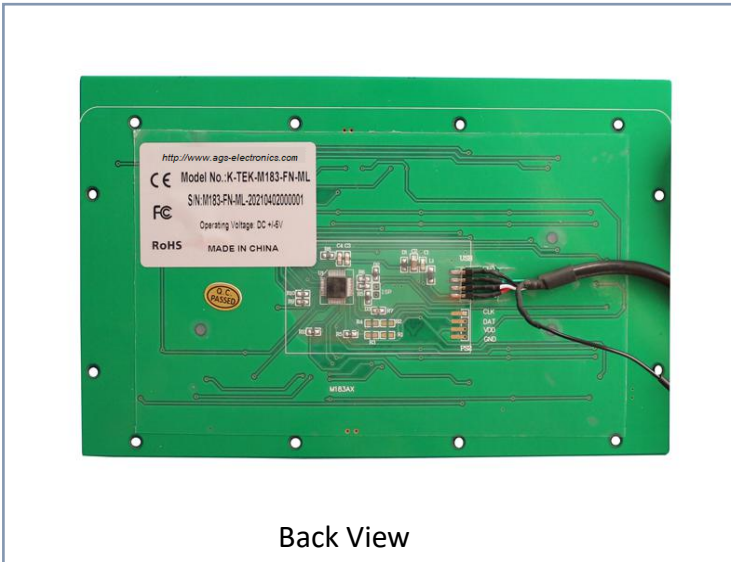

K-TEK-M315KP-FN-MS-BL

Ruggedized Silicone Rubber Keyboard



- Sealing to IP67, 102 keys
- FN keys on top line for easy operation
- Rear panel mount solution
- Membrane key switch technology with super light tactile
- Adjustable industrial white/red backlight included
- Integrated with numeric keypad

IP Grade	IP67
Interfaces	PS2, USB available
Key life	5 millions
Key type	1.20mm
Dimension	315.0mm*108.0mm (L x W)

Alternatives



Back View



K-TEK-M315KP-FN-MS-BL-NV-151B+M73TP



- Integrated with sealed and tough touchpad
- Rear panel mounted solution
- Meets MIL-STD-461G and MIL-STD-810F
- White backlight integrated
- Military level with wide temperature -40°C - +85°C
- With strong anti-interference and stability, low radiation

IP Grade	IP67
Interfaces	PS2, USB available
Key life	5 millions
Key type	1.50mm
Dimension	330.0mm*130.0mm (L x W)

Alternatives



White backlight



Back View



K-TEK-M276TP-FN-BL-ML-EMC-FDT

K-TEK-M270-FN-MS-BL-NV-151B

Ruggedized Silicone Rubber Keyboard




- Compact format design
- Meets MIL-STD-461G with EMC & MIL-STD-810F
- Adjustable industrial white backlight included
- Industrial level optional
- 12 FN keys on the top line
- Wide temperature of -40 to +80°C
- Domestic brand for whole keyboard and touchpad

IP Grade	IP67
Interfaces	USB
Color available	Black
Key type	1.50mm
Dimension	270.0mm x 113.0mm(L x W)

Alternatives



Back View

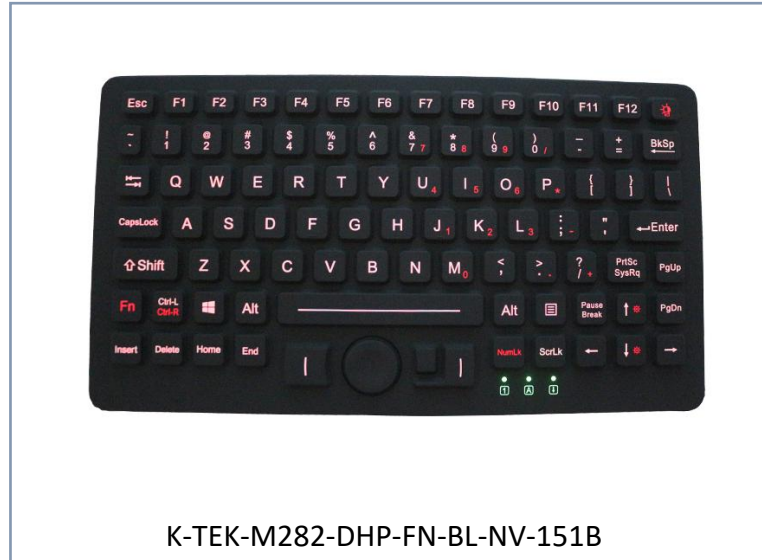

K-TEK-M282-DHP-FN-BL-NV-151B




K-TEK-M270-FN-MS-BL-NV-151B+M73TP



- Military grade with strong anti-interference, low radiation
- MIL-STD-461G with EMC & MIL-STD-810F
- Adjustable white/red backlight included
- With a separate domestic military-grade wide temperature touchpad
- Industrial level optional

IP Grade	IP67
Interfaces	PS2
Wide temperature	-40°C - 85°C
Key type	1.50mm
Dimension	Keyboard: 284.0mm*109.0mm (L x W) Touchpad: 68.0mm * 49.0mm (L x W)

Alternatives

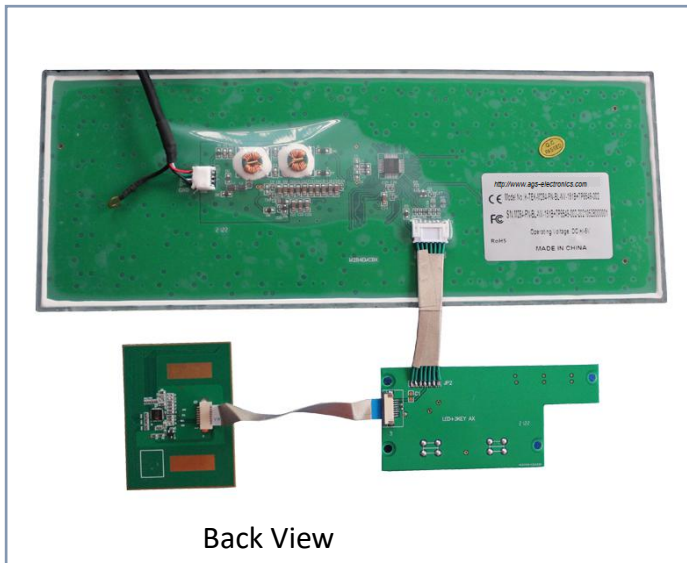

K-TEK-M312TP-FN-BL-NV-151B-DT

Ruggedized Silicone Rubber Keyboard



- Integrated with sealed and tough touchpad
- FN+Clean keys to freeze keyboard when cleaning
- White/red/blue or green color backlight optional
- With strong anti-interference, stability and low radiation
- Meets MIL-STD-461G and MIL-STD-810F
- With extremely good tactile feeling
- Inclined mountable desk top version with VESA mounting holes

IP Grade	IP67
Interfaces	Aviation plug or USB2.0
Wide temperature	-40°C - 85°C
Key type	1.50mm
Dimension	312.0mm x 215.1mm x 22.0~40.4mm (L x W x H)

Close-up



Back View





- Sealing to IP67
- Industrial membrane key switch technology
- Adjustable industrial white backlight included
- Aviation plug or USB2.0 interface available
- Panel mounted solution with sinking holes
- With Touchpad and Force Sensing Resistor pointing device

IP Grade	IP67
Interfaces	Aviation plug or USB2.0
Operating temperature	-20°C - 50°C
Key type	1.20mm
Dimension	464.0mm x 182.0mm(L x W)

Close-up



Back View





- Sealing to IP67
- Meets MIL-STD-461G and MIL-STD-810F
- Integrated with sealed and tough touchpad
- Red or white color backlight optional
- Top panel mount solution
- Industrial level optional
- Customized layout available
- With strong anti-interference, stability and low radiation

IP Grade	IP67
Interfaces	USB
Wide temperature	-40°C - 85°C
Key type	1.5 mm
Dimension	275.0mm x 169.70mm (L x W) (Front panel)

Alternatives




K-TEK-M425-LTB-FN-MS-BL



- IP67 dynamic silicone rubber keyboard
- With a conventional mouse with middle wheel, left/right buttons
- With IP54 rating 34mm 1200DPI laser trackball
- With adjustable white backlight included
- Membrane key switch technology with light tactile
- Black titanium electroplated on aluminum housing
- Top panel mount solution with 4 sinking holes
- Rugged stainless steel backplate optional

IP Grade	IP67 + IP54
Interfaces	Aviation plug or USB2.0
Key stroke	1.2mm
Backlit color	White/Red
Dimension	425.0mm x 150.0mm (Front panel)

Alternatives

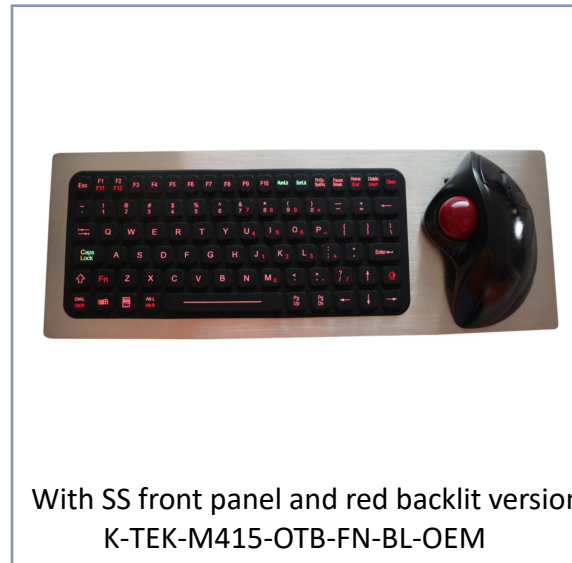



- Sealing to IP67
- Durable silicone cover
- Customized layout available
- Rear panel mount with mounting holes
- USB or PS2 or dot matrix interface available

IP Grade	IP67
Interfaces	Matrix/USB/PS2
Color available	Black
Key type	2.0mm
Dimension	18.0mm x 96.0mm(Front panel)

Close-up



Back View



Close-up pic




- Sealing to IP65
- Durable and rugged silicone cover
- 9 keys/12 keys for optional
- Customized layout available
- Dot matrix interface
- With industrial backlight

IP Grade	IP65
Interfaces	Matrix
Color available	Black
Backlit color	White
Dimension	62.0mm x 139.0mm(Front panel)


Alternatives



Back View

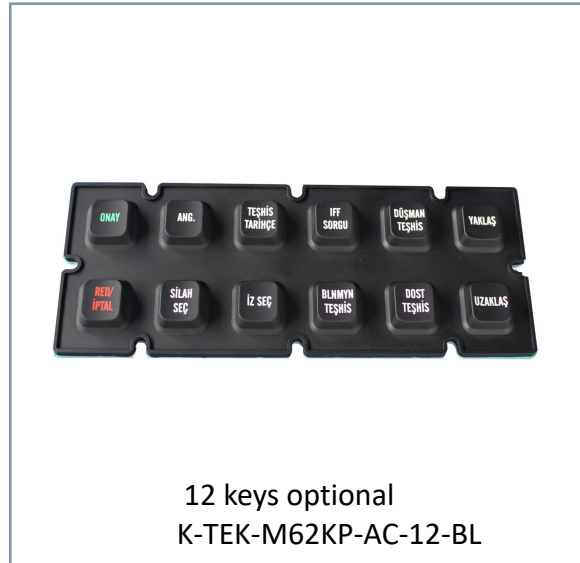

12 keys optional
K-TEK-M62KP-AC-12-BL

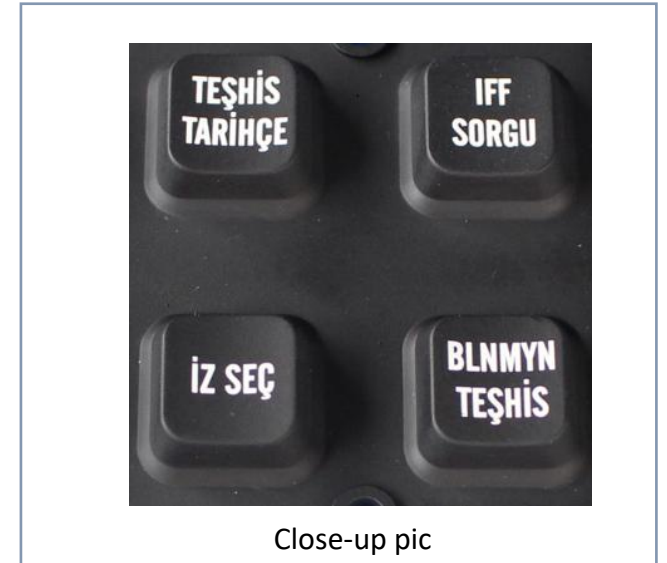

Close-up pic

K-TEK-M110TP-FN-ML-SS


Ruggedized Silicone Rubber Function Keypad



- Sealing to IP65
- Durable and rugged silicone cover
- 49 buttons, layout can be customized
- Integrated with touchpad and
- Force sensing resistor with 4 arrow buttons
- White or black color optional
- Military level with wide temperature compatible
- Stainless steel backplate with mounting holes

IP Grade	IP65
Interfaces	USB/PS2
Color available	Black or white
Dimension	110.0mm x 135.0mm(Front panel)

Close-up

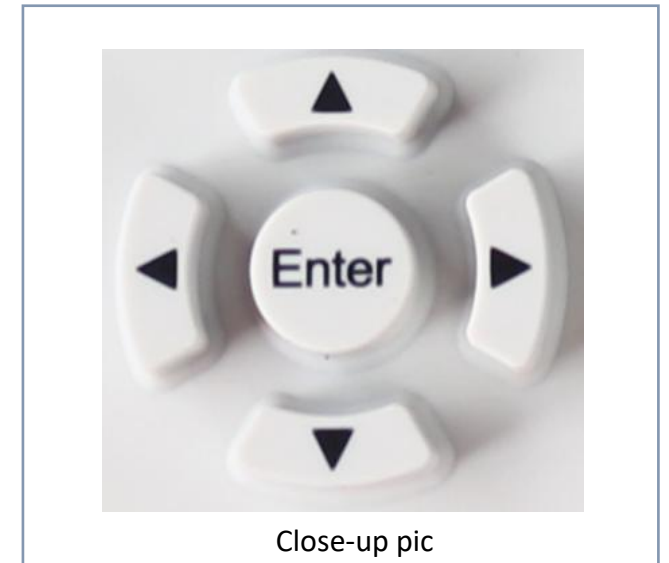




- Sealing to IP67
- Durable and rugged silicone cover
- With IP68 optical trackball at 800DPI
- With numeric keys
- Customized layout available
- Rear panel mount with mounting holes

IP Grade	IP67
Interfaces	USB/PS2
Color available	Black
Key type	1.5mm
Dimension	130.0mm x 78.0mm(Front panel)

Alternatives

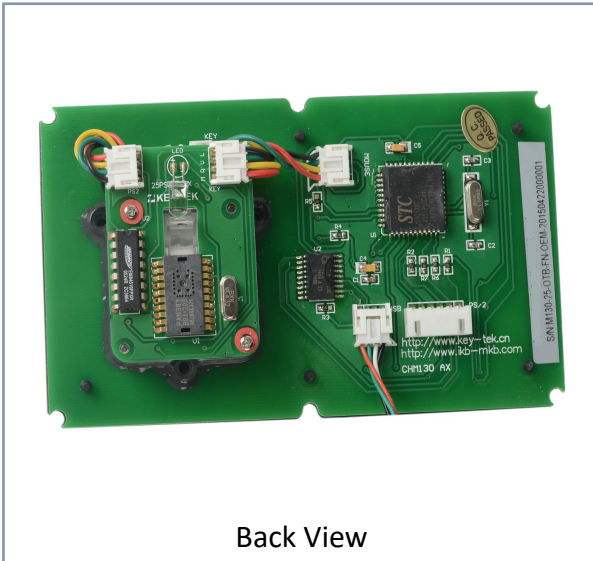

Back View



Resin optical trackball optional



Close-up pic


K-TEK-M160-HP-KP-SS-DWP



- Sealing to IP67, 22 keys.
- Compact format design
- Integrated with Force sensing resistor pointer
- Durable silicone cover
- Panel mount with mounting holes around
- Clean key to lock the keyboard during cleaning process
- 3 mouse keys

IP Grade	IP67
Interfaces	USB/PS2/RS232
Keys	22
Mounting	Panel mount
Dimension	140.0mm x 105.0mm (Front panel)

Alternatives

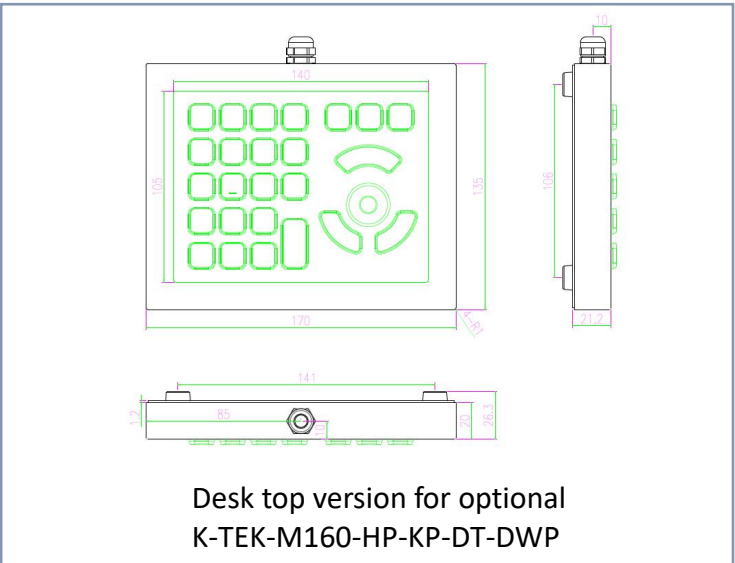



- IP67 ruggedized silicone rubber keyboard
- Ultra thin design with thickness 9.1mm only
- Customized layout available
- FN+Clean keys to freeze keyboard when cleaning
- Military level
- Design to meet EMC/EMI

IP Grade	IP67
Interfaces	USB/PS2
Color available	Black
Key type	1.5 mm
Dimension	222.0mm x 100mm x 9.1mm (L x W x H)

Alternatives




Back View



PS2/USB interfaces available




Close-up pic

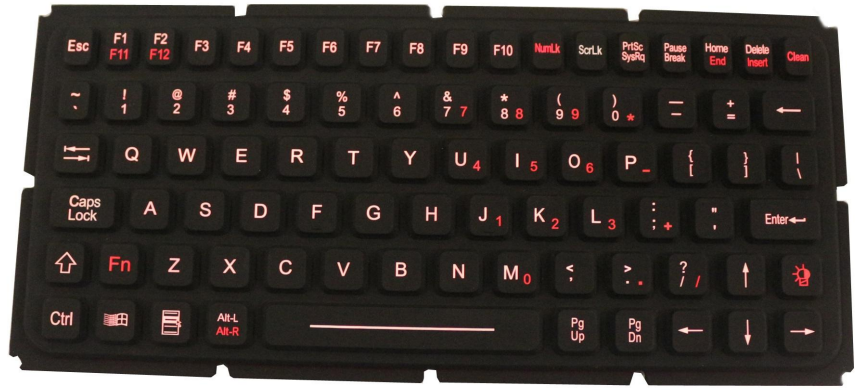

- IP67 ruggedized silicone rubber keyboard
- Customized layout available
- FN+Clean keys to freeze keyboard when cleaning
- Industrial level optional
- Adjustable 4 level backlit brightness
- Rear panel mount with mounting holes
- Design to meet MIL-STD-461G and MIL-STD-810F

IP Grade	IP67
Interfaces	USB/PS2
Color available	Black
Backlit color	Red/White/Green/Blue
Dimension	270.0mm x 113.0mm(Front panel)

Alternatives

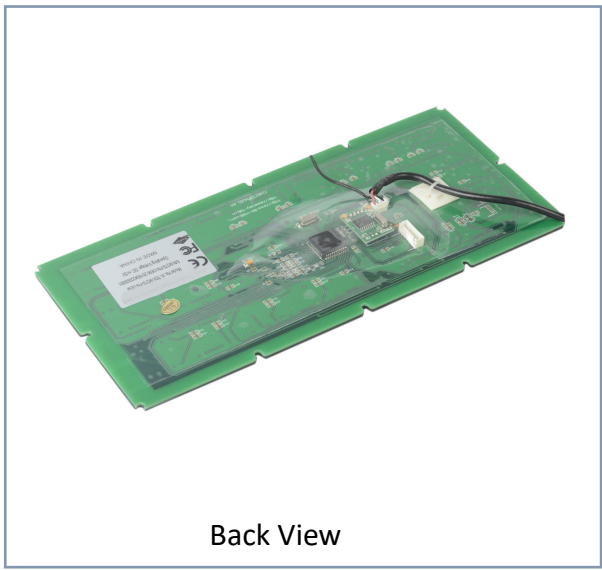

Back View



Non-backlit optional
K-TEK-M270-FN-IL-OEM



Desktop optional
K-TEK-M270-FN-DT-IL



Close-up pic



- IP67 ruggedized silicone rubber keyboard
- Industrial membrane key switch technology
- FN+Clean keys to freeze keyboard when cleaning
- Military level MIL-STD-461G and 810F optional
- Adjustable 4 level white backlit brightness
- Rear panel mount with aluminum back plate with mounting holes, desktop version optional

IP Grade	IP67
Interfaces	USB/PS2
Key travel	1.2mm
Backlit color	Red/White optional
Dimension	270mm*113mm (Front panel)


Alternatives



Back View



Carbon-on-gold key switch technology
type K-TEK-M270-FN-IL-BL-OEM

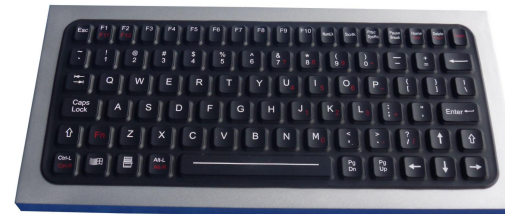

Desktop optional
K-TEK-M270-FN-DT-IL



Close-up pic


K-TEK-M400TP-FN-BL-AL-FDT



- IP67 dynamic silicone rubber keyboard
- Membrane key switch technology with light tactile
- With IP65 sealed touchpad and FN keys
- With adjustable white backlight included
- Customized layout available
- black titanium electroplated on aluminum housing
- Movable desk top version, panel mount optional

IP Grade	IP67
Interfaces	USB/PS2
Key stroke	1.2mm
Backlit color	White
Dimension	400mm x 150mm

Alternatives

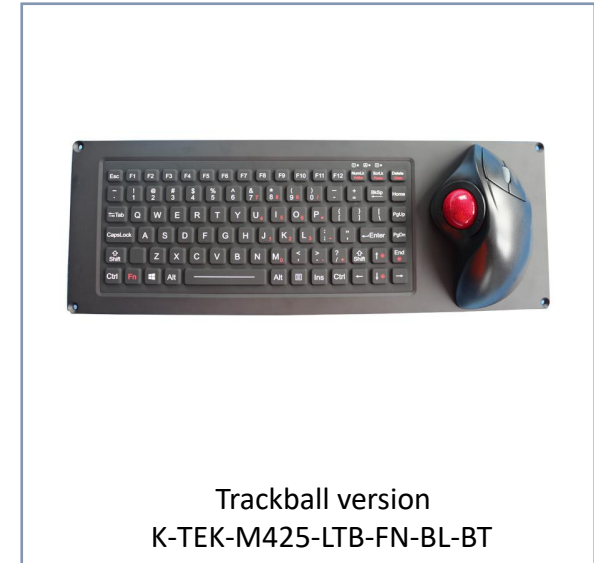




- IP67 ruggedized silicone rubber keyboard
- Customized layout available
- FN+Clean keys to freeze keyboard when cleaning
- 4 levels backlit brightness adjustable
- Industrial level or Military level optional
- Different backplate optional
- Top panel mount with glue sealing
- Ideal for rugged laptop/military PC etc. applications

IP Grade	IP67
Interfaces	USB/PS2
Color available	Black
Backlit color	Red
Dimension	283.00mm x 177.70mm (L x W)

Alternatives

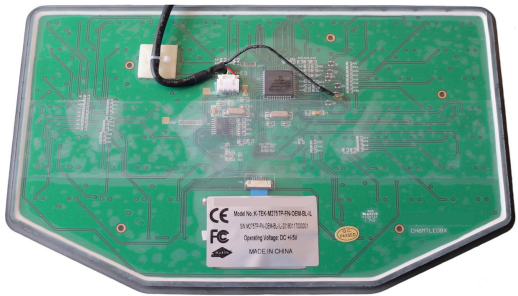

Back View



Stainless steel backplate optional
K-TEK-M275TP-FN-BL-IL-SS



Desktop version optional
K-TEK-M275TP-FN-BL-IL-FDT




Non-backlight optional
K-TEK-M275TP-FN-IL-OEM




- IP67 ruggedized silicone rubber keyboard
- With sealed and tough industrial touchpad
- Customized layout available
- FN+Clean keys to freeze keyboard when cleaning
- Military level, EMC/EMI certificated
- Meet MIL-STD-461G & MIL-STD-810F
- Anti-interference, electromagnetic compability
- 4 levels backlit brightness adjustable, NVIS optional

IP Grade	IP67
Interfaces	USB/PS2
Color available	Black
Backlit color	Red/White
Dimension	275.00mm x 168.00mm (L x W)

Alternatives

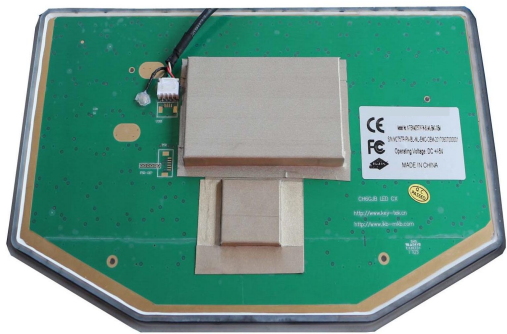

Back View

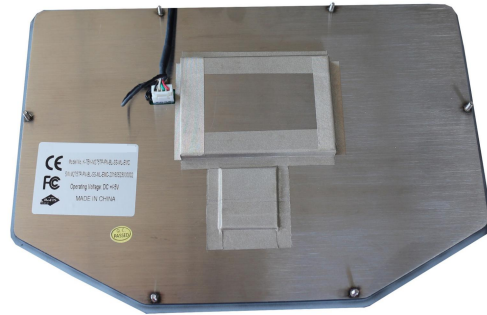

Stainless steel backplate optional
K-TEK-M275TP-FN-BL-ML-EMC-SS



Desktop version optional
K-TEK-M275TP-FN-BL-ML-EMC-FDT



Rectangle version
K-TEK-M275TP-FN-ML-SQ-EMC-OEM

K-TEK-M276KP+M18FK

Ruggedized Silicone Rubber Keyboard



- IP67 ruggedized silicone rubber keyboard
- With separate FN keys
- Customized layout available
- Rear panel mount with mounting holes

IP Grade	IP67
Interfaces	USB/PS2
Color available	Black
Key type	1.5mm
Dimension	280.0mm x 80.0mm (Front panel)


Close-up



Back View



Main part

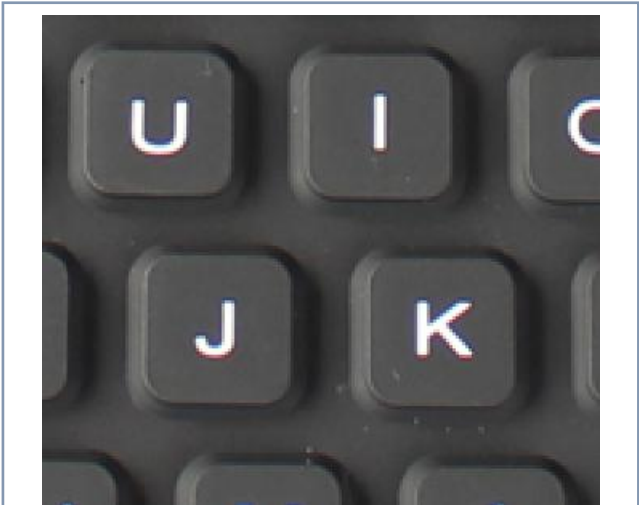

Close-up pic

K-TEK-M275-FN-BL-ML-UT-OEM



- IP67 ruggedized silicone rubber keyboard
- Ultra thin design with thickness 5.2mm only
- Customized layout available
- FN+Clean keys to freeze keyboard when cleaning
- Military level
- Adjustable 4 level backlit included, NVIS optional
- Design to meet EMC/EMI

IP Grade	IP67
Interfaces	USB/PS2
Color available	Black
Backlit color	Red/White/Green/Blue
Dimension	275.0mm x 104.0mm(Front panel)

Alternatives





- IP67 silicone rubber keyboard
- Integrated with Force Sensing Resistor (FSR)
- With 12 FN keys
- With adjustable NVIS red backlight optional
- Customized layout available
- Meet MIL-STD-461G & MIL-STD-810F
- Panel mount solution
- With tough & sealed touchpad optional

IP Grade	IP67
Interfaces	USB/PS2
Color available	Black
Backlit color	Red/White/Green/Blue
Dimension	280.4mm x 152.0mm(Front panel)


Alternatives




Back View



Desktop version optional
K-TEK-M276HP-FN-BL-ML-EMC-FDT

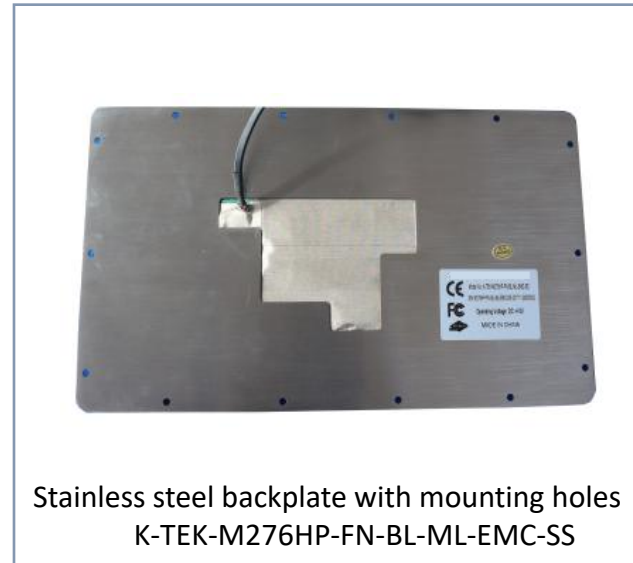

Stainless steel backplate with mounting holes
K-TEK-M276HP-FN-BL-ML-EMC-SS

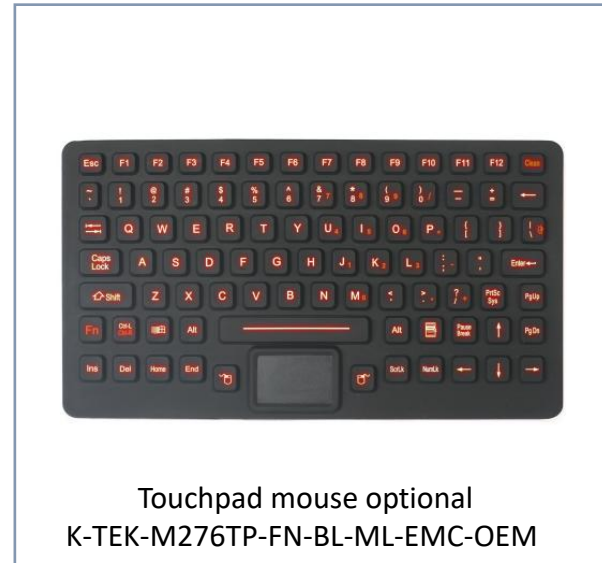

Touchpad mouse optional
K-TEK-M276TP-FN-BL-ML-EMC-OEM

K-TEK-M284-FN-BL-NV-151B




- IP67 ruggedized silicone rubber keyboard
- With 12 FN keys
- With adjustable white backlight
- Customized layout available
- Meet MIL-STD-461G & MIL-STD-810F
- Panel mount solution
- With integrated external touchpad or mouse buttons optional

IP Grade	IP67
Interfaces	USB
Color available	Black
Backlit color	White
Dimension	284.00mm x 109.00mm (L x W)

Alternatives



Back View

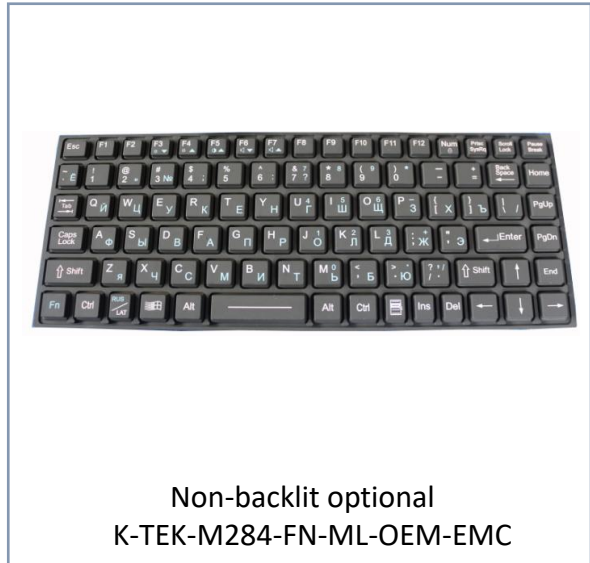

Non-backlit optional
K-TEK-M284-FN-ML-OEM-EMC



K-TEK-M284-FN-BL-ML-OEM-EMC




- IP67 ruggedized silicone rubber keyboard
- With 12 FN keys
- Customized layout available
- FN+Clean keys to freeze keyboard when cleaning
- Military level/Industrial level optional
- With rugged aluminium backplate

IP Grade	IP67
Interfaces	USB/PS2
Color available	Black
Key type	1.5mm
Dimension	300.0mm x 105.0mm(Front panel)

Close-up



Back View

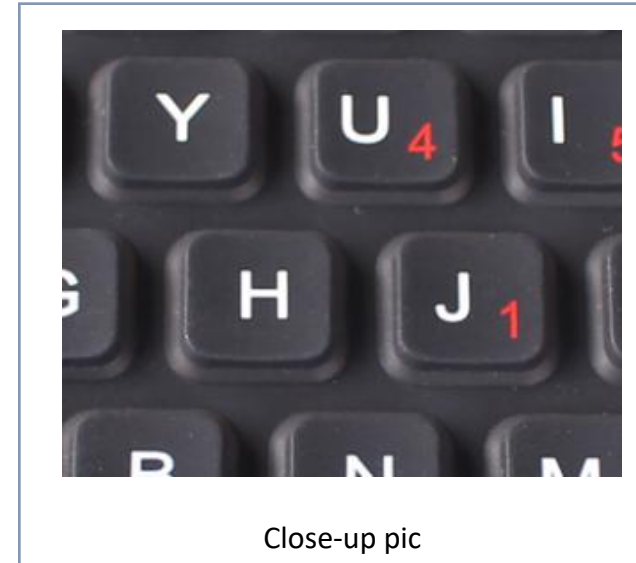


Close-up pic



- IP67 dynamic ruggedized silicone rubber keyboard
- Integrated with Force Sensing Resistor pointer(FSR)
- With 24 FN keys
- With adjustable NVIS red backlight optional
- Customized layout available
- Meet MIL-STD-461G & MIL-STD-810F
- Rear panel mount solution
- Rugged stainless steel backplate version optional

IP Grade	IP67
Interfaces	USB
Color available	Black
Backlit color	Red/White/Green/Blue
Dimension	365.0mm x 154.0mm x 8.8mm (L x W x H)

Alternatives

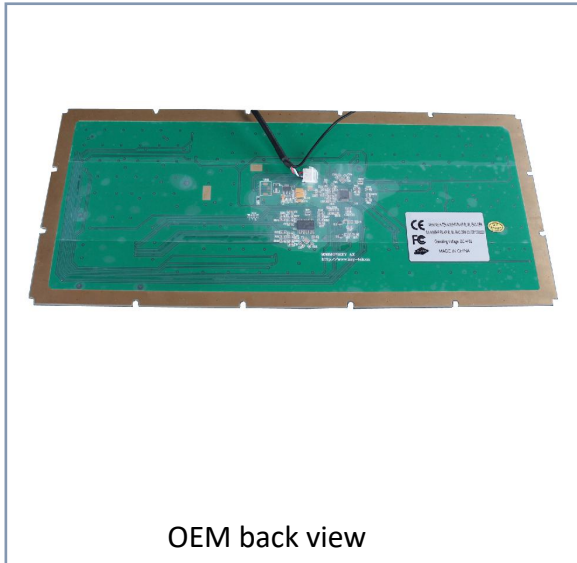

OEM back view



Non-backlit version
K-TEK-M365-HP-KP-FN-ML-EMC-OEM



Close-up pic of FSR



- IP68 ruggedized silicone rubber keyboard
- With 16mm optical trackball at 800DPI
- With aluminium housing sealed
- With adjustable NVIS backlight optional
- Customized layout available
- FN+Clean keys to freeze keyboard when cleaning
- Military level/Industrial level optional

IP Grade	IP68
Interfaces	USB/PS2
Color available	Black
Backlit color	Red
Dimension	368.0mm x 142.90mm x (18.0mm-31.0mm) (L x W x H)

Alternatives






- IP68 ruggedized silicone rubber keyboard
- With 24 FN keys
- Customized layout available
- FN+Clean keys to freeze keyboard when cleaning
- Military level/Industrial level optional
- With stainless steel housing sealed around
- Desktop version

IP Grade	IP68
Interfaces	USB/PS2
Color available	Black
Key type	1.5mm
Dimension	376.0mm x 170.0mm x (16.0-25.0mm) (L x W x H)

Alternatives

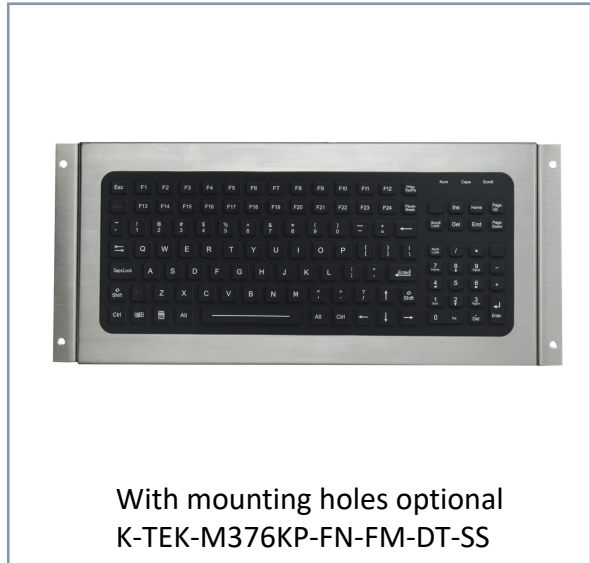



K-TEK-M378KP-FN-BL-IL-OEM



- IP67 ruggedized silicone rubber keyboard
- With 24 FN keys
- With adjustable NVIS backlight optional
- Customized layout available
- FN+Clean keys to freeze keyboard when cleaning
- Military level optional
- Rear panel mount with mounting holes

IP Grade	IP67
Interfaces	USB
Color available	Black
Backlit color	Red/White/Green/Blue/Yellow
Dimension	365.0mm x 153.8mm(Front panel)

Alternatives

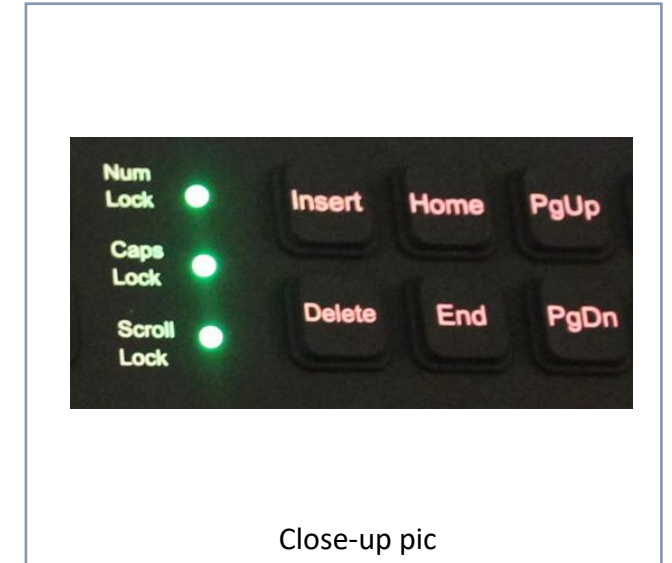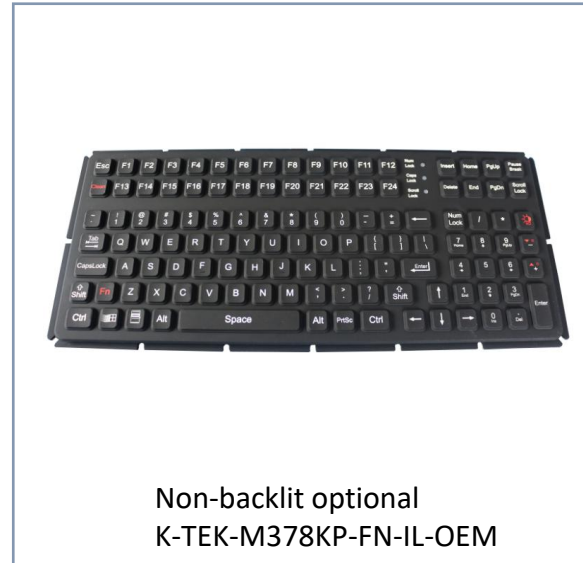



- IP67 ruggedized silicone rubber keyboard
- Integrated sealed & tough touchpad
- With 24 FN keys
- Three mounting solutions for optional
- Customized layout available
- FN+Clean keys to freeze keyboard when cleaning
- Military level/Industrial level optional
- Carbon-on-gold key switch
- Backlight/Non backlight optional

IP Grade	IP67
Interfaces	USB/PS2
Color available	Black
Mouse buttons	2
Dimension	379.0mm x 169.0mm(Front panel)

Alternatives



Available with Red backlight version
K-TEK-M379TP-KP-FN-BL-IL-OEM



OEM version
K-TEK-M379TP-KP-FN-IL-OEM



ABS frame with stainless steel bolts
K-TEK-M379TP-KP-FN-IL




Rugged Stainless Steel Plate
K-TEK-M379TP-KP-FN-IL-SS




- IP67 ruggedized silicone rubber keyboard
- Integrated IP68 25mm optical trackball at 800DPI
- With 24 FN keys
- Four mounting solutions for optional
- Customized layout available
- FN+Clean keys to freeze keyboard when cleaning
- Military level/Industrial level optional
- Backlit/Non backlight optional
- Carbon-on-gold key switch

IP Grade	IP67
Interfaces	USB/PS2
Color available	Black
Mouse buttons	2
Dimension	389.3mm x 179.2mm(Front panel)

Alternatives

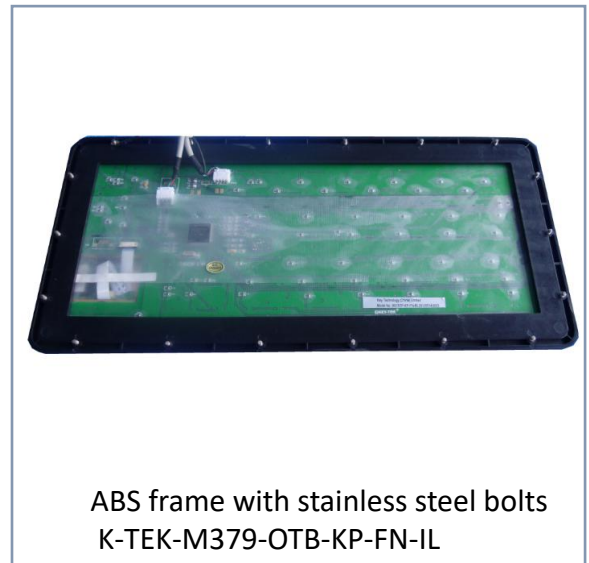

K-TEK-M390TP-KP-FN-BL-DT

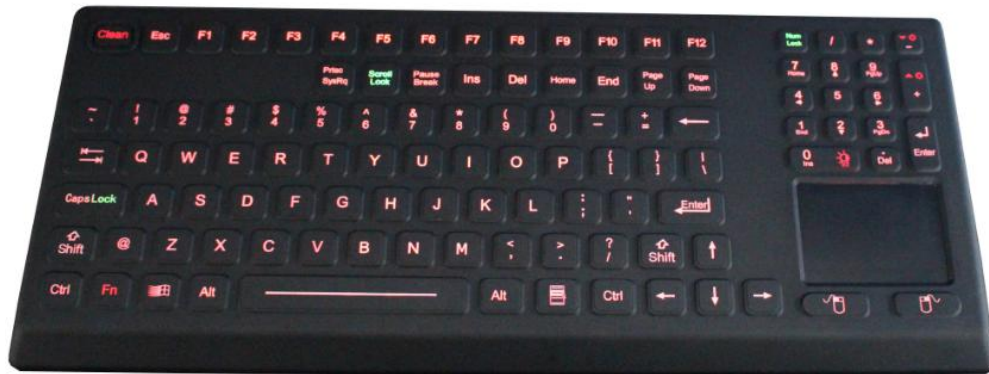

- IP68 ruggedized silicone rubber keyboard
- With 12 FN keys
- With red backlight for dim environments
- Customized layout available
- Military level/Industrial level optional
- All-in-one keyboard
- Desktop version

IP Grade	IP68
Interfaces	USB/PS2
Color available	Black
Backlit color	Red
Dimension	390.0mm x 154.0mm x 19.0mm (L x W x H)

Alternatives



Back View



K-TEK-M379TP-KP-FN-DT



Non-backlight optional
K-TEK-M390TP-KP-FN-DT



K-TEK-M396-OTB-KP-FN-BL-DT



- IP68 ruggedized silicone rubber keyboard
- With 16mm IP68 optical trackball at 800DPI
- Customized layout available
- FN+Clean keys to freeze keyboard when cleaning
- Military level/Industrial level optional
- Desktop version with VESA mounting holes
- Touchpad version available

IP Grade	IP68
Interfaces	USB/PS2
Color available	Black
Backlit color	Red
Dimension	399.0mm x 148.8mm x (20.0mm-37.90mm) (L x W x H)

Alternatives

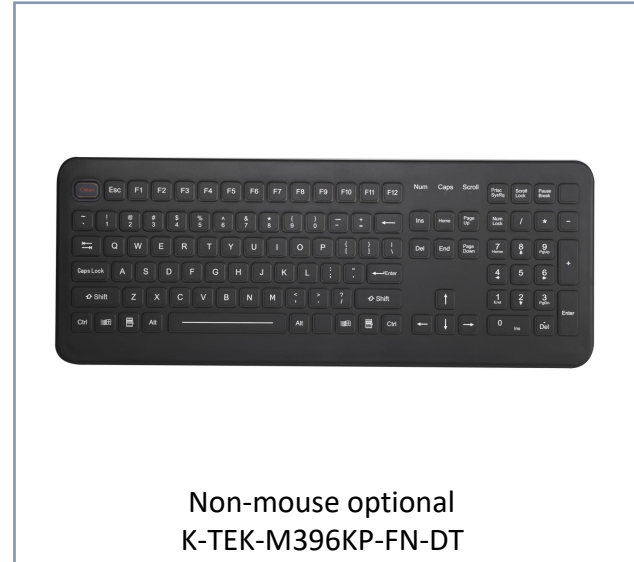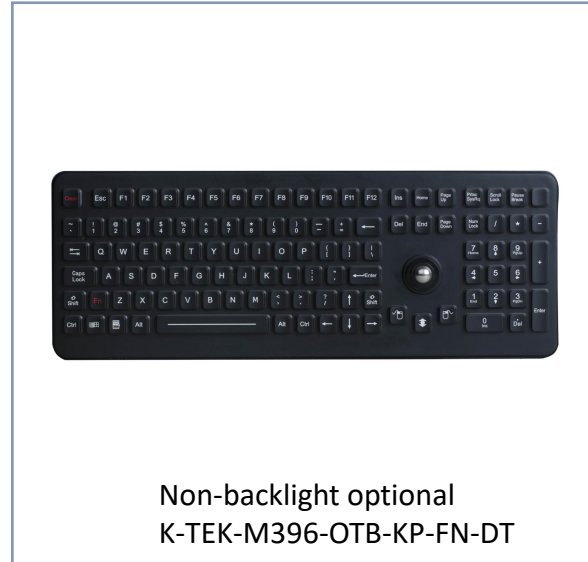


K-TEK-M396HP-KP-FN-BL-ML-EMC-OEM



- IP67 dynamic silicone rubber keyboard
- Integrated with Force Sensing Resistor (FSR)
- With 12 FN keys
- With adjustable NVIS red backlight optional
- Customized layout available
- Meet MIL-STD-461G & MIL-STD-810F
- Panel mount solution
- Rugged stainless steel backplate optional

IP Grade	IP67
Interfaces	USB
Color available	Black
Backlit color	Red/White/Green/Blue
Dimension	396.0mm x 146.0mm (Front panel)

Alternatives

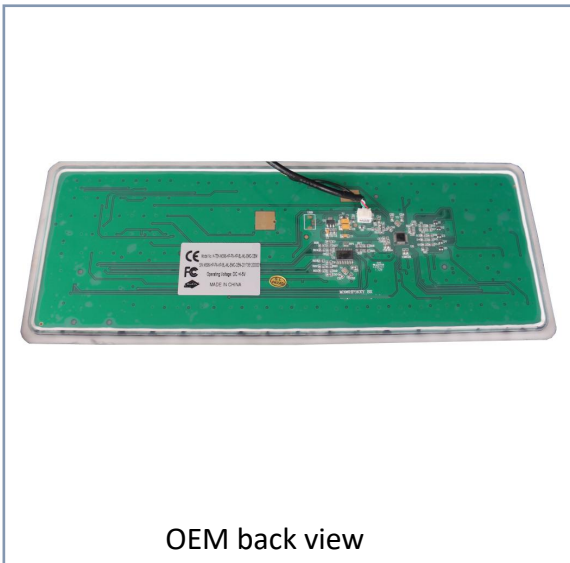

OEM back view




K-TEK-M396HP-KP-FN-BL-ML-EMC-DT




Close-up for FSR

Ruggedized Membrane Keypads/Keyboards

ral, oil and gas,

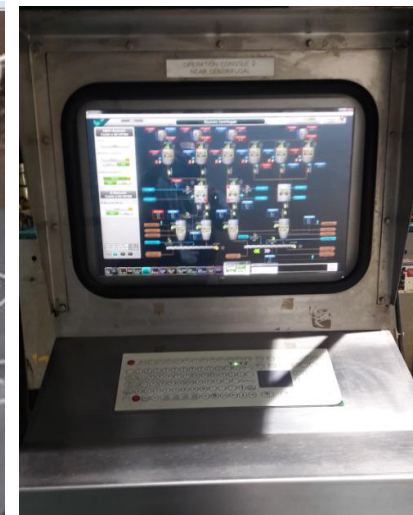

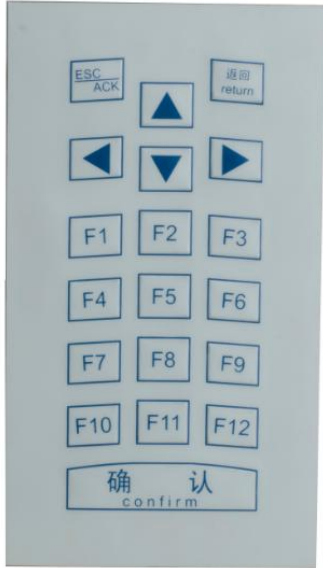


- Sealing to IP67, 19Keys
- Ideal for dusty/powder application
- Anti-microbial, durable and scratch-proof
- Top panel mount with threaded bolts
- Customized layout available

IP Grade	IP67
Interfaces	Dot Matrix/USB
Key travel	0.45mm
Switch life	1 million
Dimension	80.0mm x 143.0mm (Front panel)


Alternatives



Back View

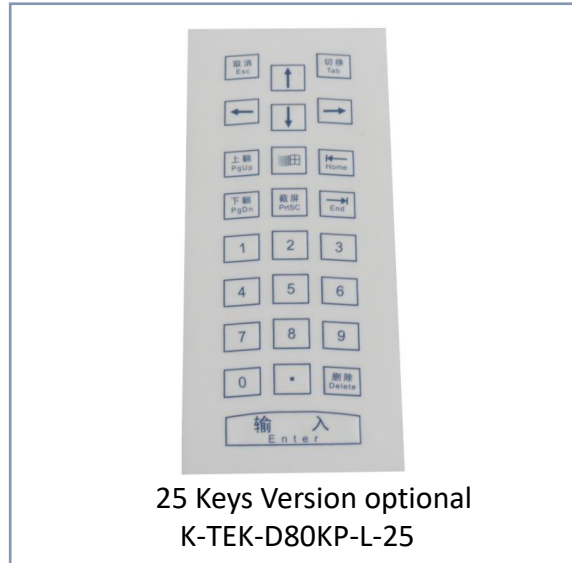

25 Keys Version optional
K-TEK-D80KP-L-25

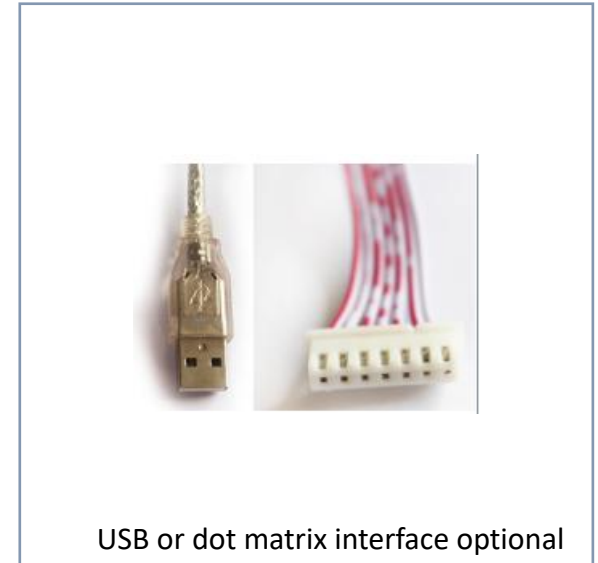



USB or dot matrix interface optional



- Sealing to IP67, 16 Keys
- Ideal for dusty/powder application
- Anti-microbial, durable and scratch-proof
- Top panel mount with threaded bolts
- Customized layout available

IP Grade	IP67
Interfaces	Dot Matrix
Key travel	0.45mm
Switch life	1 million
Dimension	100.0mm x 100.0mm (Front panel)

Alternatives

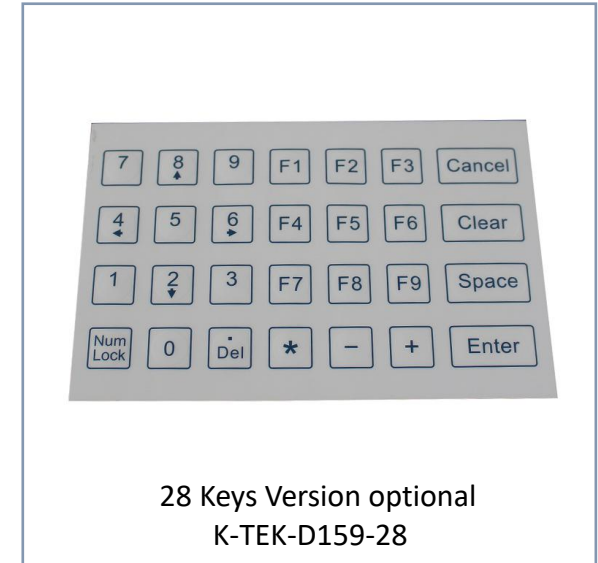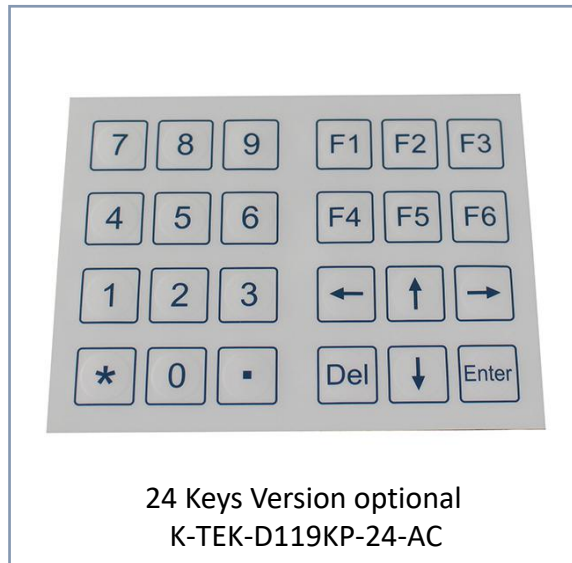

K-TEK-D182-OTB-KP-FN-SW




- Sealing to IP65, 38Keys
- Ideal for dusty/powder application
- With 25mm IP68 optical trackball at 800DPI
- Industrial PCB with Omron switch technology
- Top panel mount with threaded bolts
- Customized layout available

IP Grade	IP67
Interfaces	USB/PS2
Key travel	0.45mm
Switch life	5 million
Dimension	182.0 x 135.0mm (top panel)

Alternatives



K-TEK-D200-FN

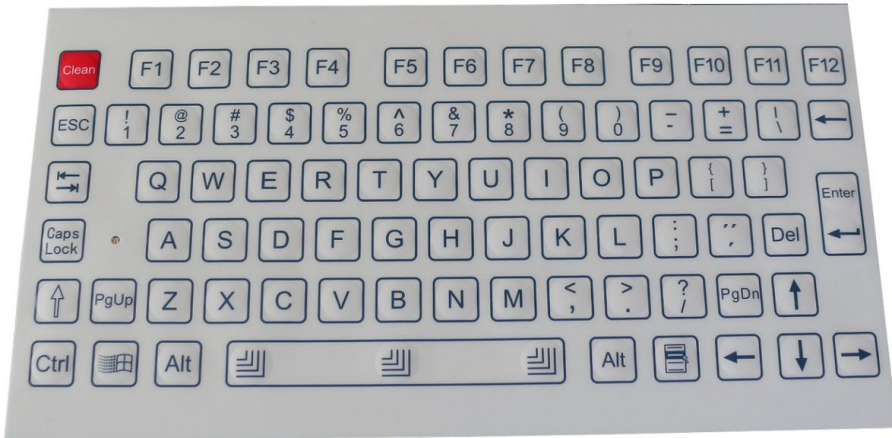


- Sealing to IP67, 78Keys
- Ideal for dusty/powder application
- With F1.F2....F12 FN keys
- Anti-microbial, durable and scratch-proof
- Clean key to lock keyboard when cleaning
- Top panel mount with threaded bolts
- Customized layout available
- Black or white color optional

IP Grade	IP67
Interfaces	USB/PS2
Key travel	0.45mm
Switch life	1 million
Dimension	220.30mm x 95.0mm (Front panel)


Alternatives



Back view

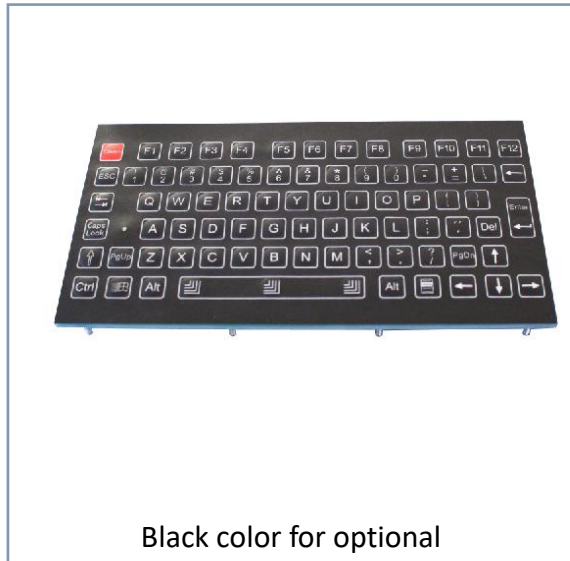

Black color for optional

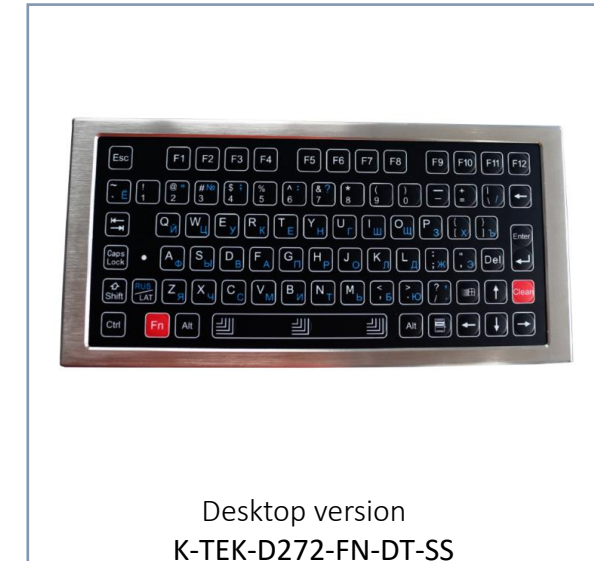


Desktop version
K-TEK-D272-FN-DT-SS



- Sealing to IP67, 47 Keys
- Ideal for dusty/powder application
- Tiny/compact size
- Anti-microbial, durable and scratch-proof
- Top panel mount with threaded bolts
- Customized layout available
- White or black color optional

IP Grade	IP67
Interfaces	USB/PS2
Key travel	0.45mm
Switch life	1 million
Dimension	224.0mm x 110.0mm (Front panel)


Close-Up

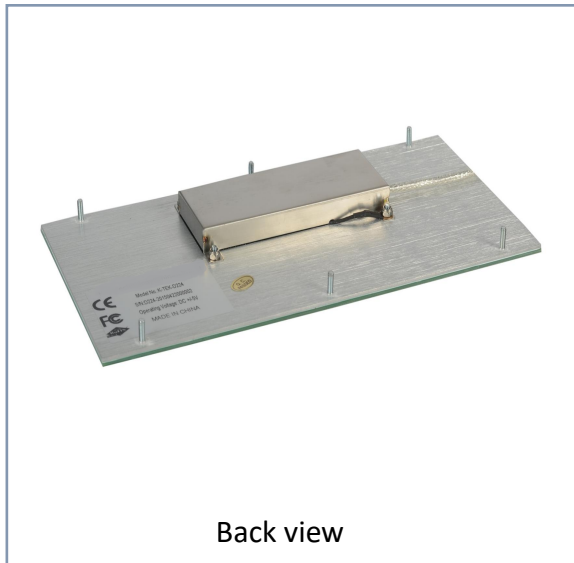

Back view




Black color for optional

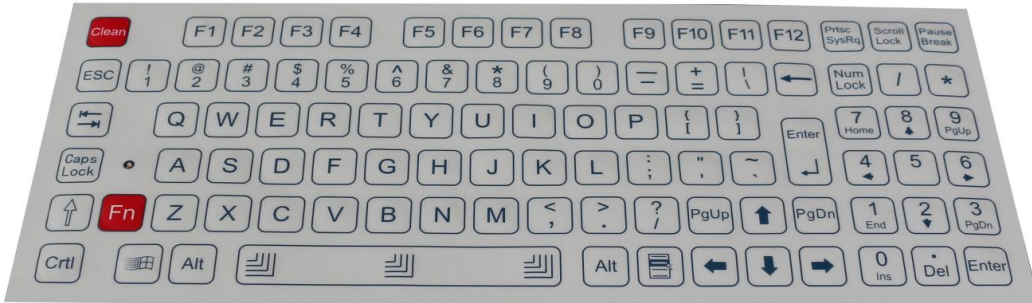

- Sealing to IP67, 97Keys
- Ideal for dusty/powder application
- With Fn keys and numeric pad
- Anti-microbial, durable and scratch-proof
- FN+Clean key to lock keyboard when cleaning
- Top panel mount with threaded bolts
- Customized layout available

IP Grade	IP67
Interfaces	USB/PS2
Key travel	0.45mm
Switch life	1 million
Dimension	320.0mm x 125.0mm (Front panel)

Close-Up

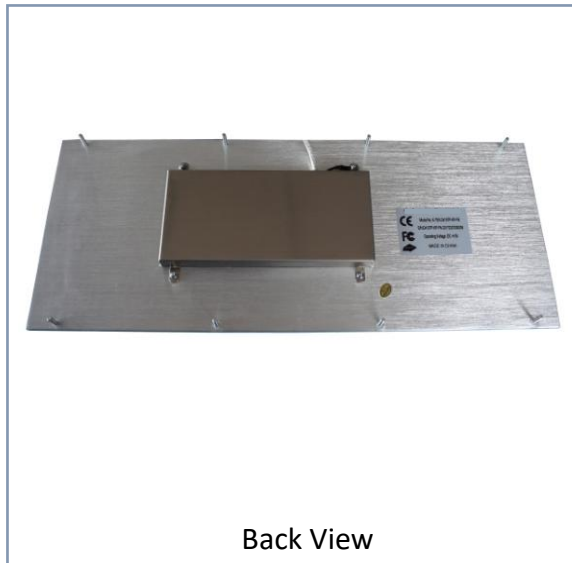

Back View



FN + Clean Keys to lock the keyboard



- Sealing to IP67, 107Keys
- Ideal for dusty/powder application
- With sealed and tough touchpad
- With 12 FN keys and numeric keypad
- Anti-microbial, durable and scratch-proof
- FN+Clean key to lock keyboard when cleaning
- Top panel mount with threaded bolts
- Customized layout available
- Black or white color optional

IP Grade	IP67
Interfaces	USB/PS2
Key travel	0.45mm
Switch life	1 million
Dimension	321.0mm x 139.0mm (Front panel)

Alternatives



Back View



IP68 Optical trackball with 800DPI optional
K-TEK-D321-OTB-KP-FN



Desktop version
K-TEK-D321TP-KP-FN-DT



Without touchpad version
K-TEK-D321KP-FN




- Sealing to IP67, 84Keys
- Ideal for dusty/powder application
- With 38mm IP68 optical trackball at 800DPI
- Industrial PCB with Omron switch technology
- Top panel mount with threaded bolts
- Customized layout available
- Black/white color optional

IP Grade	IP67
Interfaces	USB/PS2
Key travel	0.45mm
Switch life	5 million
Dimension	333.0mm x 150.0mm (Front panel)


Alternatives



Back View

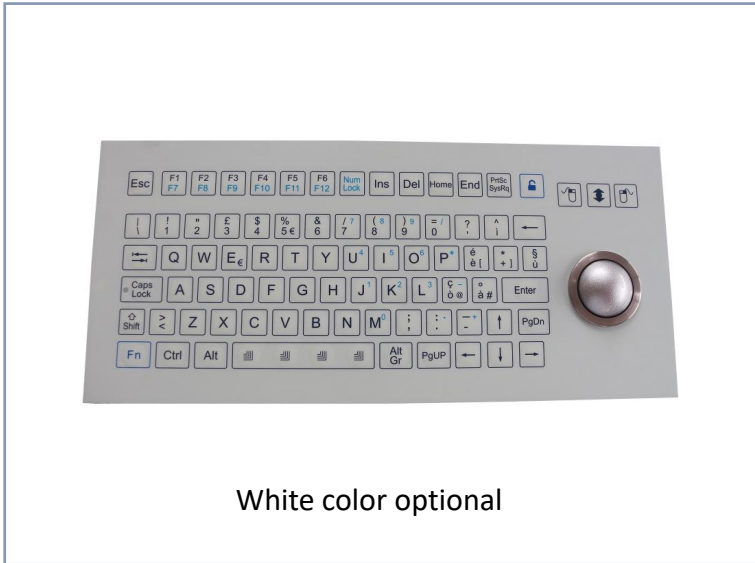

White color optional

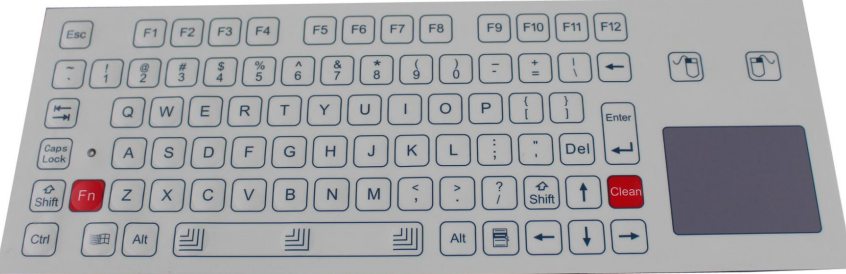

- Sealing to IP67, 81Keys
- Ideal for dusty/powder application
- Sealed with IP65 touchpad
- FN+Clean key to lock keyboard when cleaning
- Top panel mount with threaded bolts
- Customized layout available

IP Grade	IP67
Interfaces	USB/PS2
Key travel	0.45mm
Switch life	1 million
Dimension	343.0mm x 125.0mm (Front panel)

Alternatives



Back View



With IP68 optical trackball for optional K-TEK-D343-25-OTB-FN



Desktop version for optional K-TEK-D343TP-FN-DT


K-TEK-D396TP-KP-FN-DT-SW



- Sealing to IP68, 108Keys
- Ideal for dusty/powder application
- Sealed with IP65 tough touchpad
- Inclined desktop & VESA mounting holes
- FN+Lock key to lock keyboard when cleaning
- Industrial PCB with Omran switch technology
- Customized layout available
- Touchpad/trackball mouse optional

IP Grade	IP68
Interfaces	USB/PS2
Key travel	0.45mm
Switch life	5 million
Dimension	399.0mm x 148.8mm x (20.0mm - 37.9mm) (L x W x H)

Alternatives

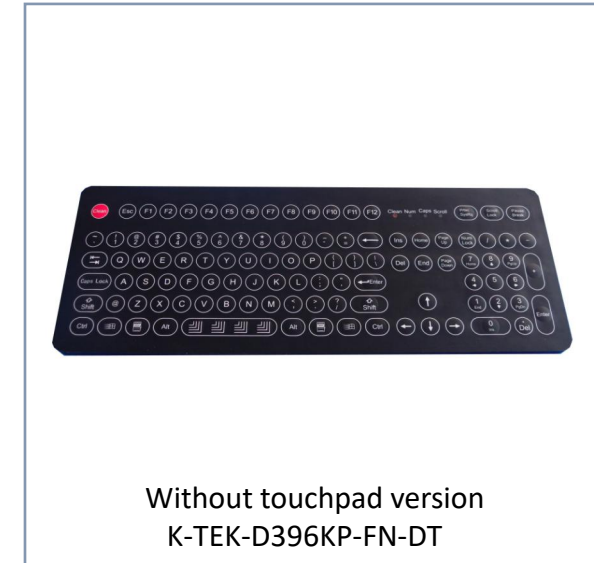



- Sealing to IP68, 108Keys
- Ideal for dusty/powder application
- Sealed with IP65 tough touchpad
- Anti-microbial, durable and scratch-proof
- FN+Clean key to lock keyboard when cleaning
- Desktop version
- Customized layout available
- Black or white color optional

IP Grade	IP68
Interfaces	USB/PS2
Key travel	0.45mm
Switch life	1 million
Dimension	399.0mm x 150.0mm x 19.3mm (L x W x H)

Alternatives



Back View



Top panel mounted version
K-TEK-D399TP-KP-FN



Black version
K-TEK-D399TP-KP-FN-DT



Without touchpad version
K-TEK-D399KP-FN-DT



- Sealing to IP67, 108Keys
- Ideal for dusty/powder application
- Sealed with IP65 tough touchpad
- With 12 FN keys and numeric keys
- Anti-microbial, durable and scratch-proof
- FN+Lock keys to lock keyboard when cleaning
- Top panel mount with threaded bolts
- Customized layout available
- Industrial PCB with Omron switch technology

IP Grade	IP67
Interfaces	USB/PS2
Key travel	0.45mm
Switch life	5 million
Dimension	410.0mm x 160.0mm (Front panel)

Alternatives



Back View



IP68 Optical trackball at 800DPI optional
K-TEK-D410-OTB-KP-FN-SW



White color optional
K-TEK-D410TP-KP-FN



Without touchpad version
Metal dome version
K-TEK-D410KP-FN



- Sealing to IP67, 108Keys
- OMRON micro key switch technology
- Full functionality all-in-one keyboard
- Extremely good and light tactile feeling
- Flush mounted solution with mounting studs Ideal for medical, marine, food & beverage application
- With industrial white backlight to fit for dim condition

IP Grade	IP67
Interfaces	USB/PS2
Key travel	0.45mm
Backlight color	white
Dimension	410.0mm x 160.0mm (top panel)

Alternatives



Back View



Trackball version
K-TEK-D410-OTB-KP-FN-SW



Non- backlight version
K-TEK-D410TP-KP-FN-SW




White color membrane available



- Sealing to IP67, 108Keys
- Ideal for dusty/powder application
- Sealed with IP68 washable optical trackball
- With 12 FN keys and numeric keys
- Anti-microbial, durable and scratch-proof
- FN+Lock keys to lock keyboard when cleaning
- Top panel mount with threaded bolts
- Customized layout available
- Industrial PCB with Omron switch technology

IP Grade	IP67
Interfaces	USB/PS2
Key travel	0.45mm
Switch life	5 million
Dimension	410.0mm x 160.0mm (Front panel)


Alternatives

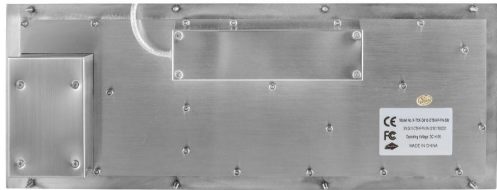

Back View



IP67 touchpad version
K-TEK-D410-OTB-KP-FN-SW

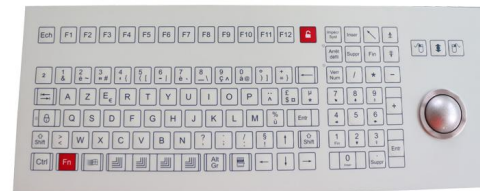

White color optional



Without trackball version
Metal dome version
K-TEK-D410KP-FN

Marine/Navy Mice&keyboards with backlit

Factory's Marine/Navy keyboards are designed and built for the Marine/Navy applications.

- Strong polymer keys

It ensures the keyboard's resistance to willful destruction, vandal-proof, against corrosion, weather-proof under hostile environments. Key-tops are laser-etched or high quality ink print in legends and characters for easy readability, long life to prevent lettering rub-off. Operational life of more than 10 million cycles per key.

- Dynamic waterproof

These are made with patented technology which is known as DWP version. DWP is the core and mature technology which earned a good reputation from our overseas customers. They are designed to meet: IP67 rated for DWP panel mount keyboards, IP68 rated for DWP desk top keyboards.

- Black titanium electroplated

Marine keyboards' top surface or housing are with high quality scratch-proof black titanium electroplated, the vast majority of navigation customers choose all black design.

- NVIS-compliant adjustable industrial backlighting Optional


The Red/blue backlight with adjustable 4 brightness levels makes this keyboard ideal for military, aviation or vehicle applications where night vision goggles are necessary.

- Ease of customizing with multiple languages

To accommodate foreign or custom variants.

- Integrated mouse device

Trackball/Touchpad/Trackball/Force Sensing Hula pointer optional.

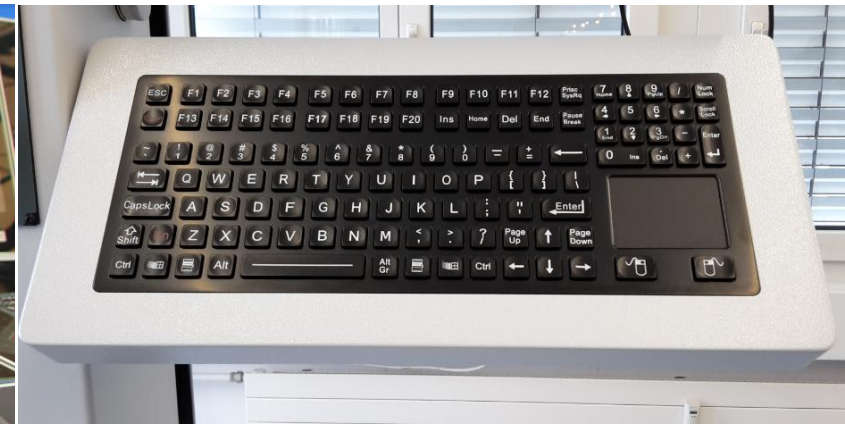




K-TEK-M390-MTB-AVB-FN-BL-NV-151B-DWP



- With 38mm mechanical trackball module at 400DPI
- Meet MIL-STD-461G & MIL-STD-810F
- Application temperature: -40°C - +85°C
- Strong durable polymer key caps
- Red/white backlight optional
- No rust risk and anti-salt spray corrosion
- Extremely good and super light tactile feeling
- Touchpad optional
- Top panel mount solution, desktop version optional

IP Grade	IP67
Interfaces	Aviation plug or USB port
Key travel	1.2mm
Switch life	5 million
Dimension	390.0mm x 145.0mm (top panel)

Alternatives

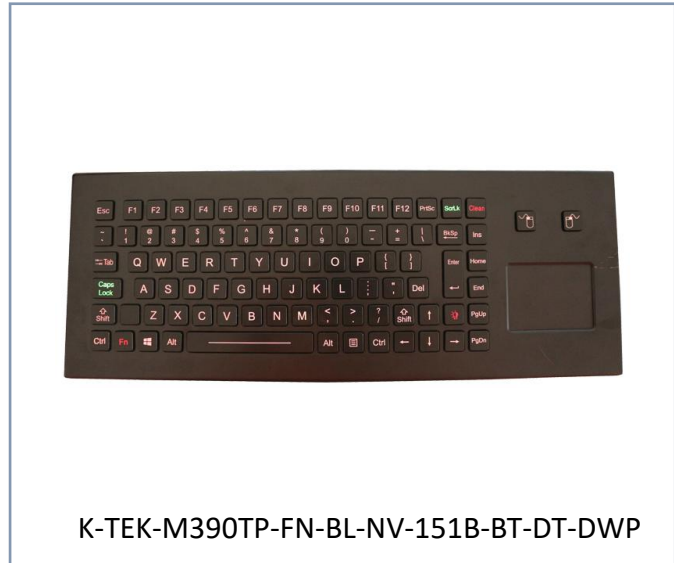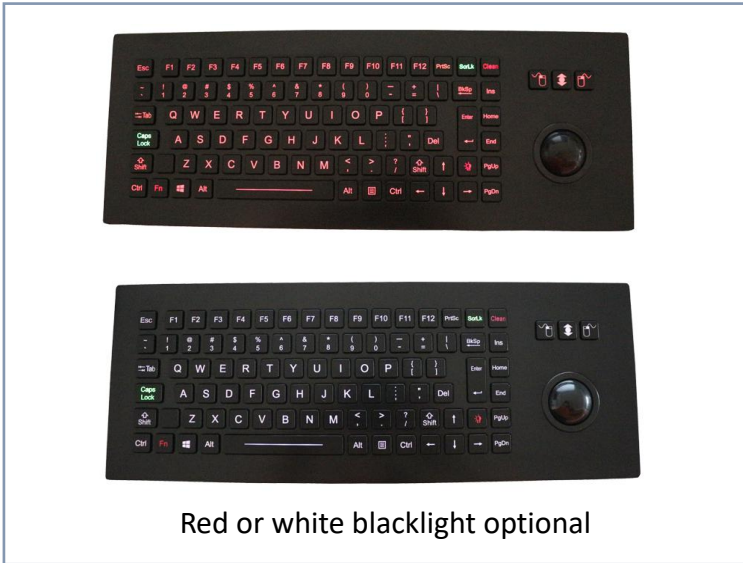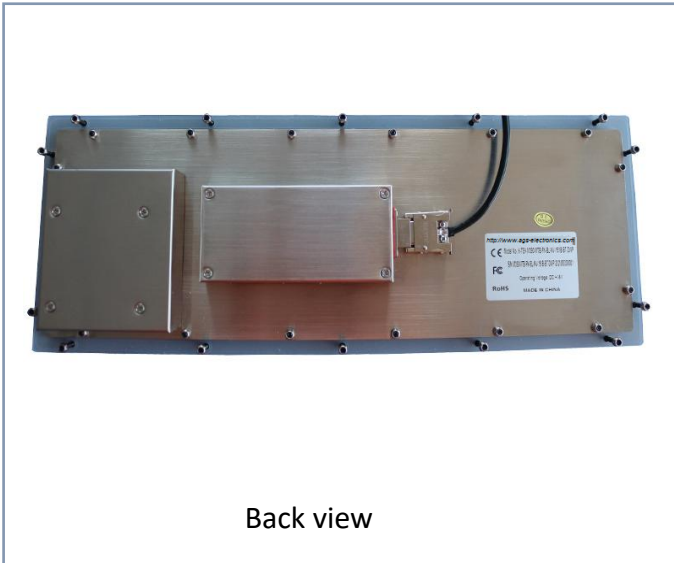

K-TEK-M270-FN-BL-NV-151B-DWP



- Meet MIL-STD-461G & MIL-STD-810F
- Application temperature: -40°C - +85°C
- Strong durable polymer key caps
- White backlight included
- No rust risk and anti-salt spray corrosion
- Extremely good and super light tactile feeling
- Black titanium electroplated to withstand salt spray

IP Grade	IP67
Interfaces	USB
Key travel	1.0mm
Switch life	5 million
Dimension	270.0mm x 110.0mm (top panel)

Alternatives



K-TEK-M334KP-FN-BL-NV-EMC-DWP-151B



- Meet MIL-STD-461G & MIL-STD-810F
- Application temperature: -40°C - +85°C
- Strong durable polymer key caps
- White or red backlight optional
- Aluminum alloy top panel is processed by CNC
- Military level, industrial level optional

IP Grade	IP67
Interfaces	USB 2.0
Key travel	1.0mm
Switch life	5 million
Dimension	334.0mm x 118.0mm (top panel)

Alternatives



K-TEK-M285TP-FN-ML-BL-DWP



- Strong durable polymer key caps
- Adjustable white backlight included
- Aluminum alloy top panel is processed by CNC
- Top panel mounted version
- Military level, Operating temperature -40°C to +80°C
- Customized layout available

IP Grade	IP67
Interfaces	USB
Key travel	1.0mm
Switch life	5 million
Dimension	285.0mm x 179.7mm (L XW)

Alternatives



Back view




K-TEK-M285TP-FN-BL-NV-151B-DWP



- IP67 static waterproof tough touchpad
- 2 backlit mouse buttons for left and right click
- Scratch-proof high quality black titanium electroplated on the top surface
- Panel mount with 2 mounting holes aside
- Customized layout available

IP Grade	IP67
Interfaces	USB/PS2
Key travel	1.50mm
Switch life	5 million
Dimension	140.0mm x 55.0mm (Front panel)

Alternatives

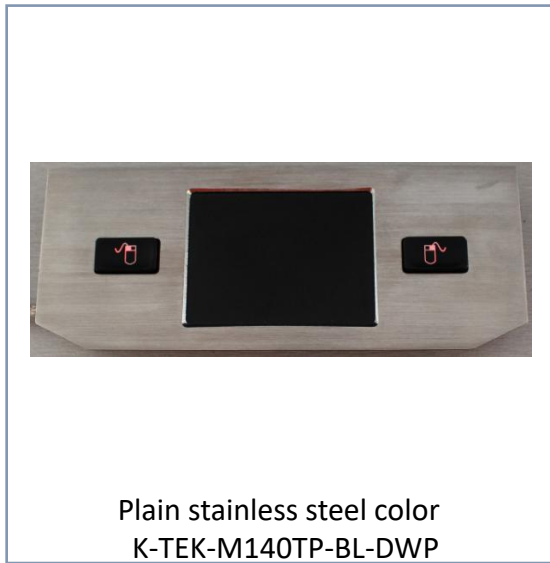




- IP67 waterproof, 16 Keys
- Tiny compact design
- Scratch-proof high quality black titanium electroplated on the top surface
- Top panel mount with threaded bolts
- Customized layout available

IP Grade	IP67
Interfaces	USB/PS2/RS232/dot matrix
Key travel	0.45mm
Switch life	5 million
Dimension	75.0mm x 73.0mm (Front panel)

Alternatives



Back view

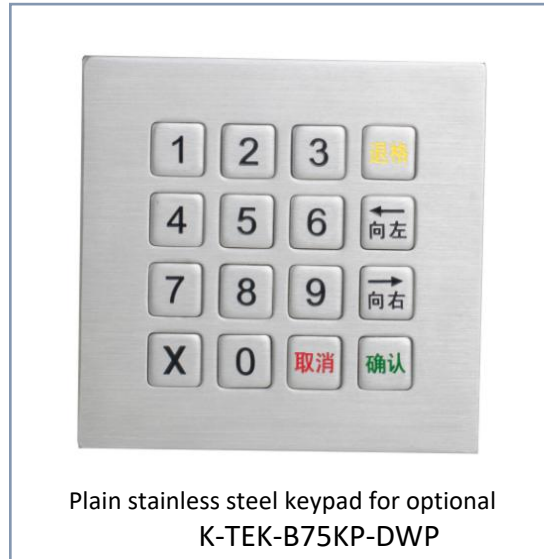

Plain stainless steel keypad for optional K-TEK-B75KP-DWP



PS2/RS232/USB/Dot matrix interface available

K-TEK-B124KP-BL-BT-DWP



- IP67 static waterproof, 16 Keys
- Scratch-proof high quality black titanium electroplated on the top surface
- Top panel mount with threaded bolts
- Customized layout available
- With waterproof gasket
- Industrial blue color backlight included

IP Grade	IP67
Interfaces	USB/PS2/RS232/dot matrix
Key travel	0.45mm
Switch life	5 million
Dimension	124.0mm x 98.0mm (Front panel)

Alternatives



Back view



PS2/RS232/USB/
Dot matrix interface available



K-TEK-M270-BL-BT-ML-DWP



- Sealing to IP67
- No rust risk and anti-salt spray corrosion
- With combined FN keys (F1,F2....F12)
- Strong durable polymer key caps
- Rear panel mount with mounting holes
- Customized layout available
- Military level
- With green backlight

IP Grade	IP67
Interfaces	USB/PS2
Key travel	1.5mm
Switch life	5 million
Dimension	270.0mm x 105.0mm (Front panel)

Alternatives

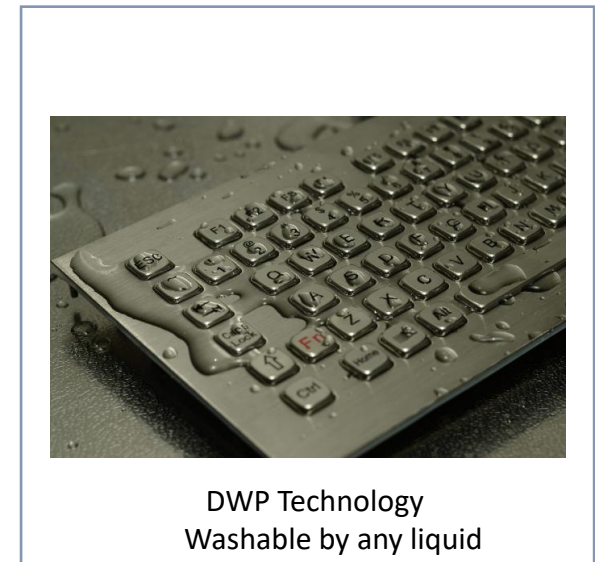
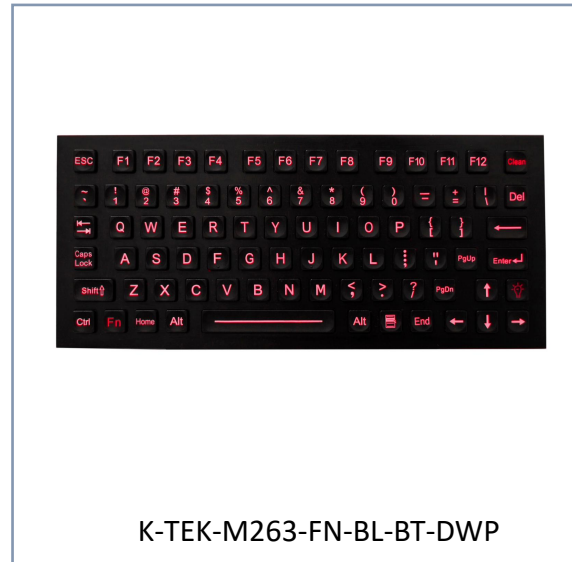




- Sealing with IP65
- No rust risk and anti-salt spray corrosion
- With FN keys (F1,F2....F12)
- Red/blue/white/green backlit optional
- FN+CLEAN to lock the keyboard when cleaning
- Strong durable polymer key caps
- Rear panel mount with mounting holes around
- Customized layout available

IP Grade	IP65
Interfaces	USB/PS2
Key travel	1.5mm
Switch life	5 million
Dimension	298.0mm x 129.5mm (Front panel)

Alternatives

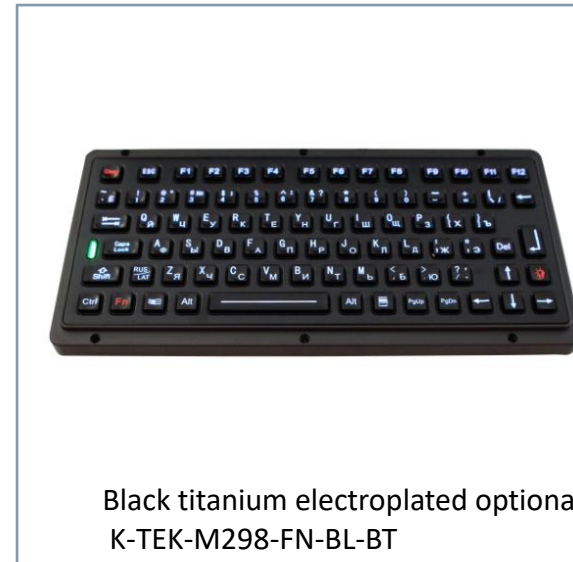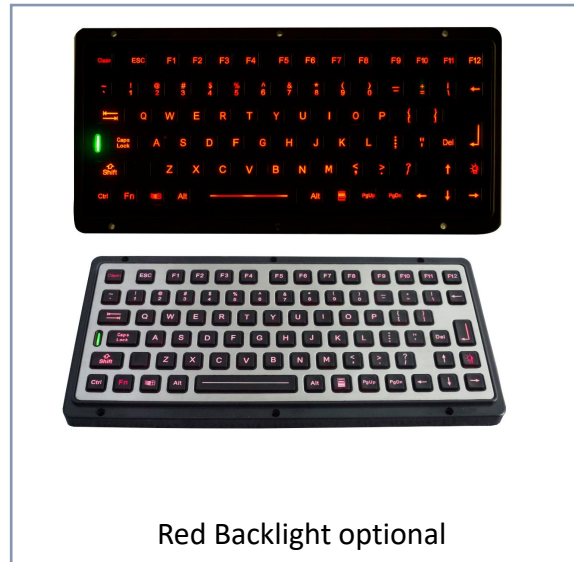




K-TEK-M263-FN-BL-BT-DWP



- Sealing to IP67, 82Keys
- No rust risk and anti-salt spray corrosion
- With FN keys (F1,F2....F12)
- Red/blue/white/green backlit optional
- Strong durable polymer key caps
- Top panel mount with threaded bolts
- Customized layout available

IP Grade	IP67
Interfaces	USB/PS2
Key travel	1.5mm
Switch life	5 million
Dimension	263.0mm x 130.0mm(Front panel)

Close-Up

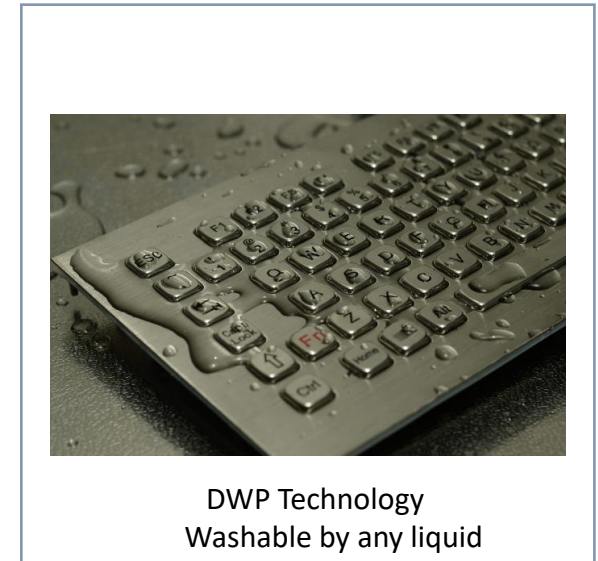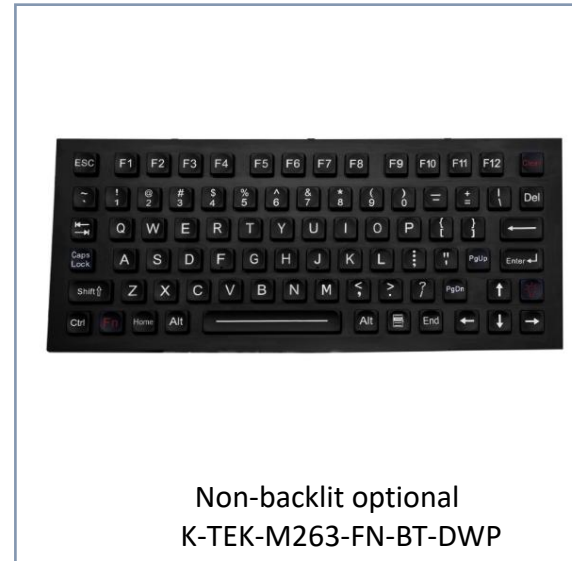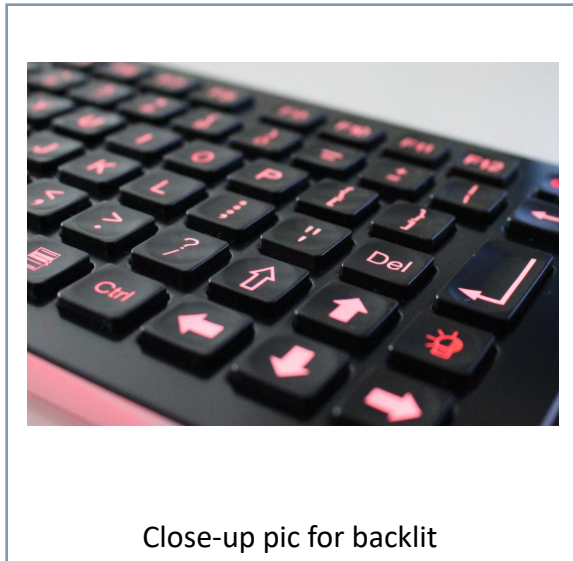

K-TEK-M255TP-FN-BL-BT-DWP



- Sealing to IP67, 84Keys
- With tough and rugged touchpad
- No rust risk and anti-salt spray corrosion
- With FN keys (F1,F2....F12)
- Red/blue/white/green backlit optional
- Strong durable polymer key caps
- Rear panel mount with mounting holes
- Customized layout available

IP Grade	IP67
Interfaces	USB/PS2
Key travel	1.5mm
Switch life	5 million
Dimension	255.0mm x 165.0mm(Front panel)

Alternatives



Back view



Close-up pic for backlit



Non-backlit optional
K-TEK-M255TP-FN-BT-DWP

K-TEK-M343TP-FN-BL-BT-DWP




- Sealing to IP67, 85Keys
- No rust risk and anti-salt spray corrosion.
- With FN keys (F1,F2....F12)
- Red/blue/white/green backlit optional
- Integrated with sealed and tough touchpad
- Strong durable polymer keycaps
- Rear panel mount with mounting holes
- Customized layout available

IP Grade	IP67
Interfaces	USB/PS2
Key travel	1.5mm
Switch life	5 million
Dimension	343.0mm x 125.0mm(Front panel)


Close-Up




Back view

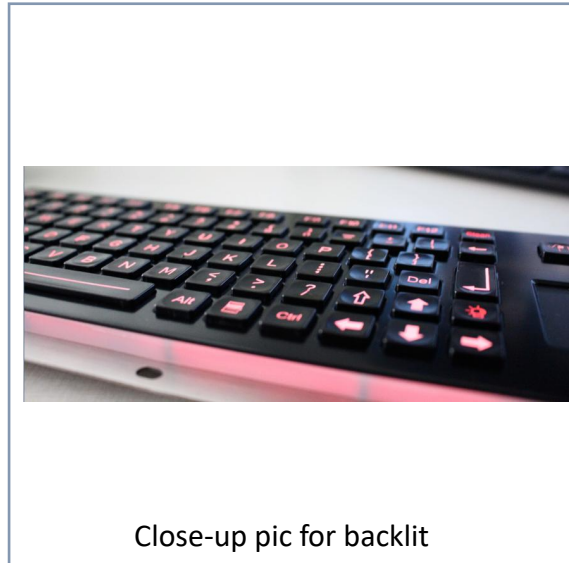

Close-up pic for backlit

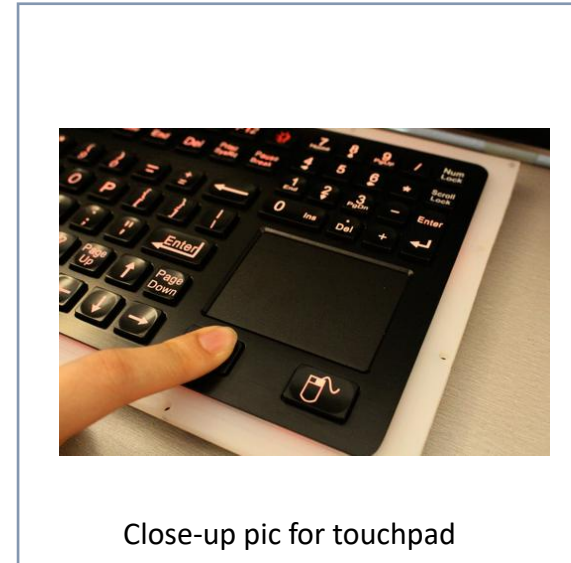

Close-up pic for touchpad

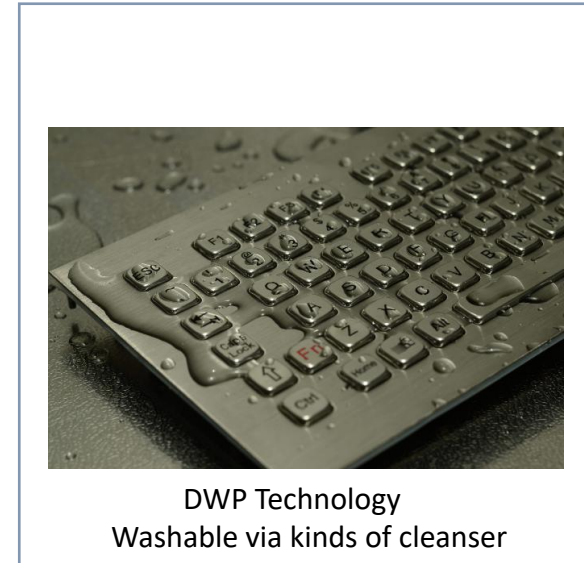

DWP Technology
Washable via kinds of cleanser

K-TEK-M344KP-FN-BL-BT-EMC-DWP



- Sealing to IP67, 100Keys
- No rust risk and anti-salt spray corrosion.
- With number keys and FN keys (F1,F2....F12)
- Red/blue/white/green backlit optional
- Strong durable polymer keycaps
- Rear panel mount with mounting holes
- Customized layout available
- Designed to meet MIL-STD-461G and 810F

IP Grade	IP67
Interfaces	USB/PS2
Key travel	1.5mm
Switch life	5 million
Dimension	344.0mm x 121.0mm (Front panel)

Close-Up



Back view



Plain stainless steel color version optional
K-TEK-M344KP-FN-BL-ML-EMC-DT-DWP



Desktop version
K-TEK-M344KP-FN-BL-BT-ML-EMC-DT-DWP

K-TEK-M360TP-KP-FN-BL-BT-DWP



- Sealing to IP67, 116Keys
- No rust risk and anti-salt spray corrosion
- With numeric keys and 20 FN keys(F1...F20)
- Red/blue/white/green backlit optional
- Integrated with sealed and tough touchpad
- Strong durable polymer key caps
- Rear panel mount with mounting holes
- Customized layout available

IP Grade	IP67
Interfaces	USB/PS2
Key travel	1.5mm
Switch life	5 million
Dimension	360.0mm x 144.0mm(Front panel)

Alternatives



K-TEK-M361-OTB-FN-BL-BT-DWP




- Sealing to IP67, 85Keys
- No rust risk and anti-salt spray corrosion.
- Red/blue/white/green color backlit optional
- With FN keys(F1...F12)
- With IP68 38mm optical trackball at 800DPI
- Strong durable polymer keycaps
- Top panel mount with threaded bolts
- Customized layout available

IP Grade	IP67
Interfaces	USB/PS2
Key travel	1.5mm
Switch life	5 million
Dimension	361.0mm x 145.0mm(Front panel)


Alternatives




Back view

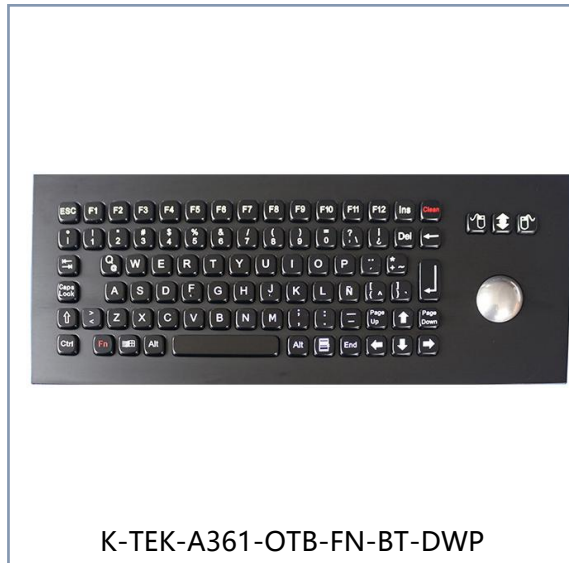

K-TEK-A361-OTB-FN-BT-DWP

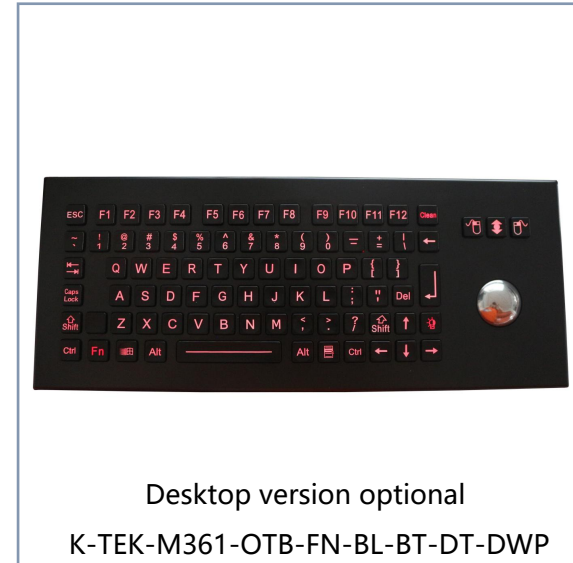

Desktop version optional
K-TEK-M361-OTB-FN-BL-BT-DT-DWP

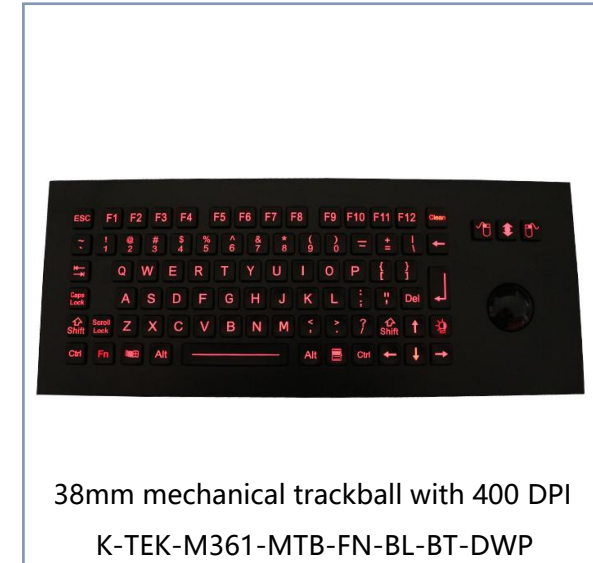

38mm mechanical trackball with 400 DPI
K-TEK-M361-MTB-FN-BL-BT-DWP


K-TEK-M361TP-FN-BL-BT-DWP



- With tough and rugged touchpad
- Top panel mount with threaded bolts
- Strong durable polymer key caps
- No rust risk and anti-salt spray corrosion
- Adjustable red/blue backlight available
- Black titanium electroplated on the top stainless steel plate
- Trackball optional

IP Grade	IP67
Interfaces	USB/PS2
Key travel	2.0mm
Switch life	more than 5 million of operations
Dimension	361.0mm x 145.0mm (front panel)

Alternatives

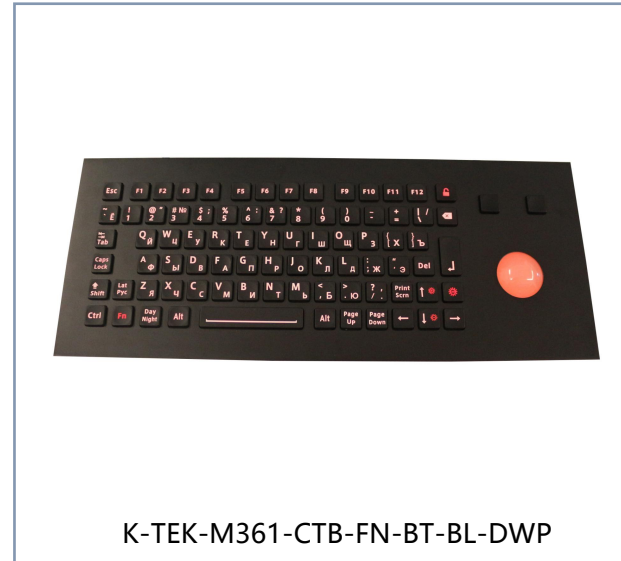


K-TEK-M376TP-FN-BL-IL-DWP



- Sealing to IP67, 88Keys
- No rust risk and anti-salt spray corrosion
- Red/blue/white/green color backlit optional
- With sealed and tough touchpad
- Strong durable polymer key caps
- Top panel mount with threaded bolts
- With waterproof gasket
- Super light and comfortable tactile feeling

IP Grade	IP67
Interfaces	USB/PS2
Key travel	1.5mm
Switch life	5 million
Dimension	376.0mm x 137.0mm(Front panel)

Alternatives

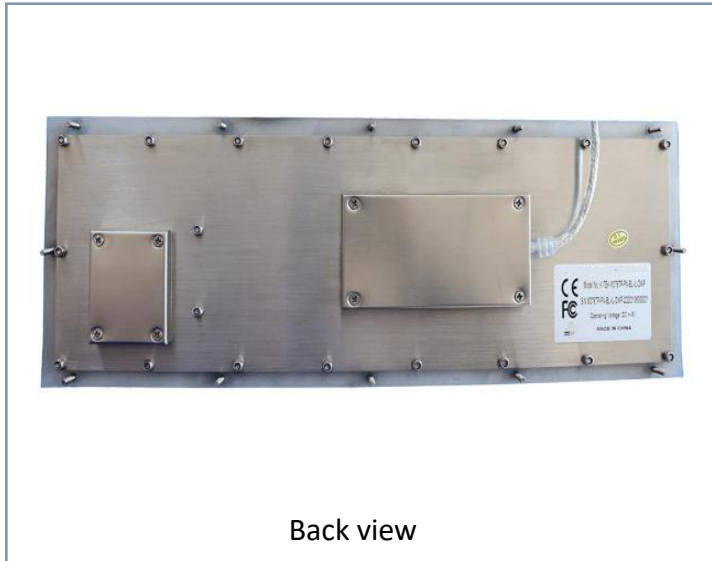

Back view



white color backlighting





DWP Technology
Washable easily by most cleanser



- Sealing to IP67, 76Keys
- No rust risk and anti-salt spray corrosion
- Red/blue/white/green color backlit optional
- With IP68 38mm optical trackball at 800DPI
- Strong durable polymer key caps
- Rear panel mount with mounting holes
- With waterproof gasket
- Customized layout available

IP Grade	IP67
Interfaces	USB/PS2
Key travel	1.5mm
Switch life	5 million
Dimension	369.0mm x 108.0mm(Front panel)

Alternatives

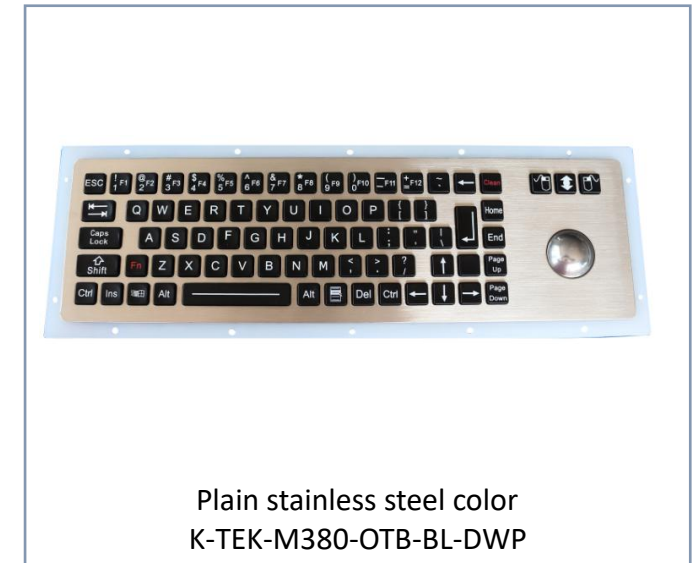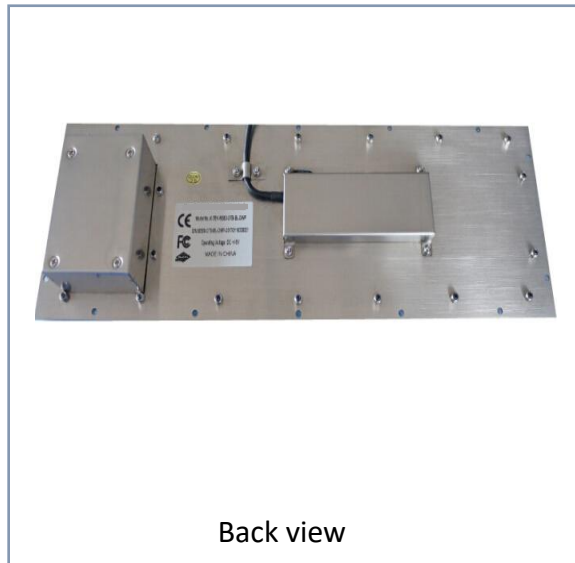


K-TEK-M380TP-FN-BL-ML-EMC-DWP



- Sealing to IP67, 89Keys
- No rust risk and anti-salt spray corrosion
- Red/blue/white/green color backlit optional
- Integrated with sealed and tough touchpad
- Strong durable polymer key caps
- Rear panel mount with mounting holes
- With waterproof gasket
- Meet MIL-STD-461G & MIL-STD-810F

IP Grade	IP67
Interfaces	USB/PS2
Key travel	1.5mm
Switch life	5 million
Dimension	370.9mm x 129.3mm(Front panel)

Alternatives

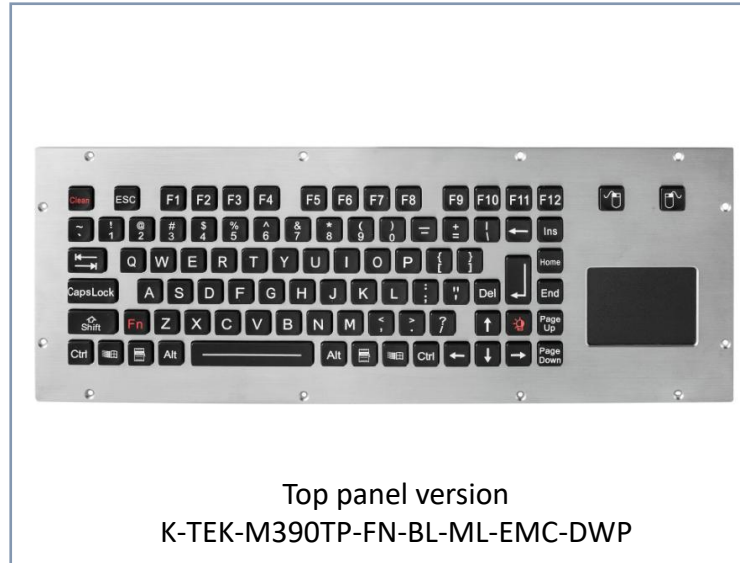


K-TEK-M390TP-FN-BL-EMC-DWP



- Sealing to IP67, 90Keys
- No rust risk and anti-salt spray corrosion
- Red/blue/white color backlit optional
- Integrated with sealed and tough touchpad
- Strong durable polymer key caps
- Top panel mount with mounting studs and 4 sinking holes
- With waterproof gasket
- Meet MIL-STD-461G & MIL-STD-810F

IP Grade	IP67
Interfaces	USB/PS2
Key travel	1.5mm
Switch life	5 million
Dimension	390.9mm x 149.30mm (front panel)

Alternatives

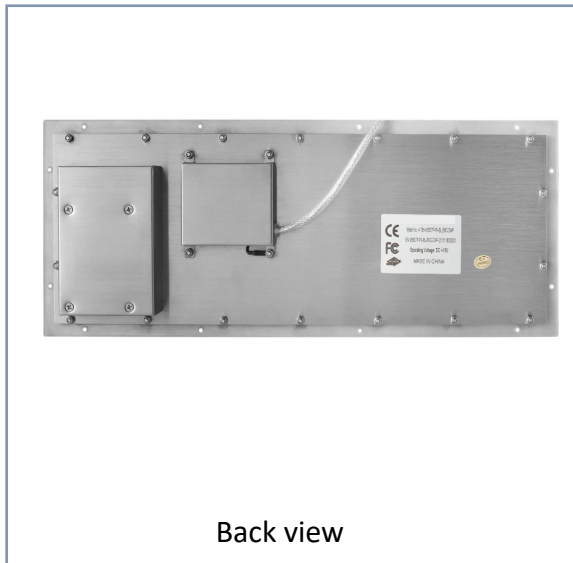




- Sealing to IP65, 103 Keys
- No rust risk and anti-salt spray corrosion
- FN keys on the upper line
- Numeric keys on the right part
- Red/blue/white/green color backlit optional
- Strong durable polymer keycaps
- Rear panel mount with mounting holes
- Customized layout available

IP Grade	IP65
Interfaces	USB/PS2
Key travel	1.5mm
Switch life	5 million
Dimension	398.0mm x 129.5mm (Front panel)


Alternatives



Back view

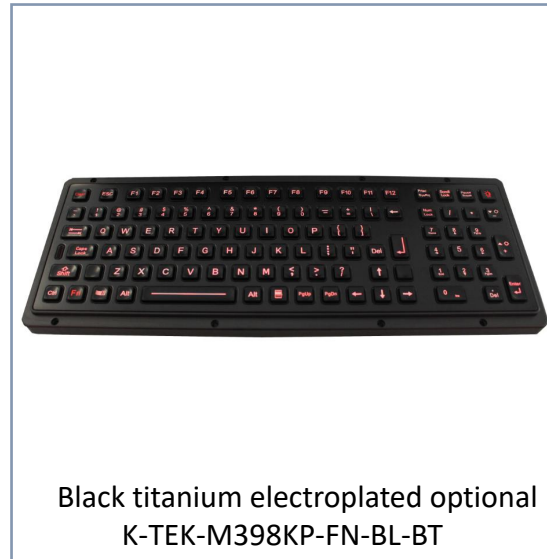

Black titanium electroplated optional
K-TEK-M398KP-FN-BL-BT

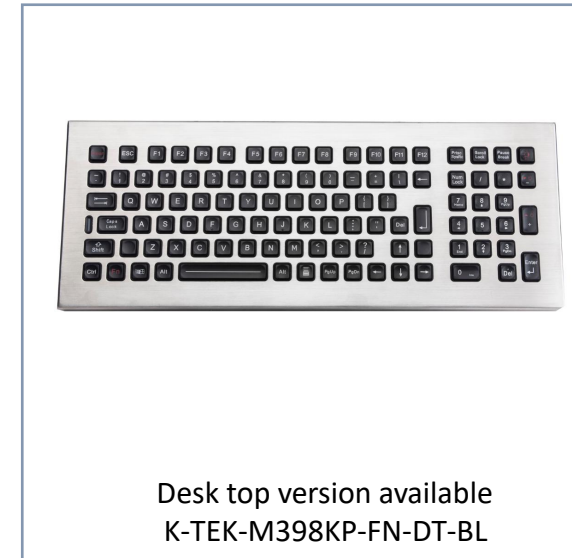


Desk top version available
K-TEK-M398KP-FN-DT-BL



- Sealing to IP65, 106 Keys
- ALL-IN-ONE professional keyboard
- No rust risk and anti-salt spray corrosion
- FN keys on the upper line
- Numeric keys on the right part
- IP65 38mm mechanical trackball at 400DPI
- Red/blue/white/green color backlit optional
- Strong durable polymer keycaps
- Rear panel mount with mounting holes
- Customized layout available

IP Grade	IP65
Interfaces	USB/PS2
Key travel	1.5mm
Switch life	5 million
Dimension	460.0mm x 129.5mm (Front panel)

Alternatives


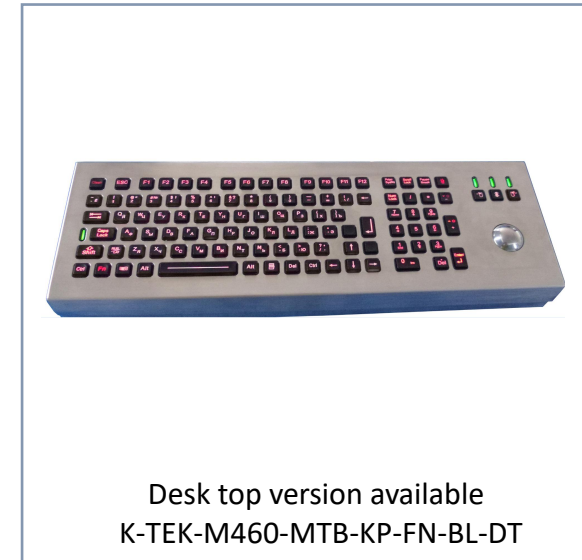




- Sealing with IP65, 106 Keys
- ALL-IN-ONE professional keyboard
- No rust risk and anti-salt spray corrosion
- FN keys on the upper line
- Numeric keys on the right part
- Integrated with a tough touchpad
- Red/blue/white/green color backlit optional
- Strong durable polymer keycaps
- Rear panel mount with mounting holes
- Customized layout available

IP Grade	IP65
Interfaces	USB/PS2
Key travel	1.5mm
Switch life	5 million
Dimension	460.0mm x 129.5mm (Front panel)

Alternatives

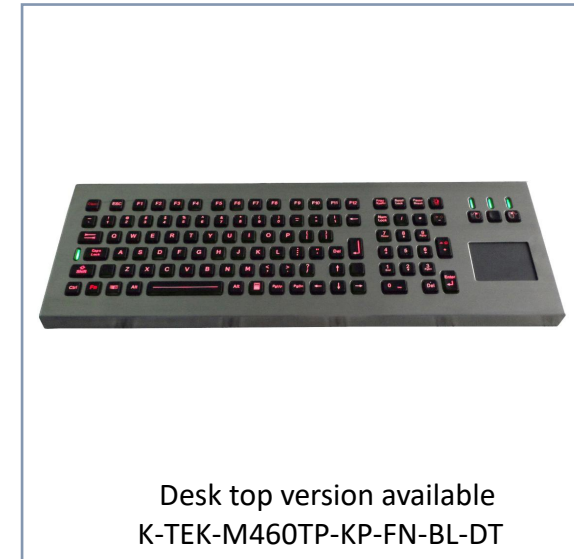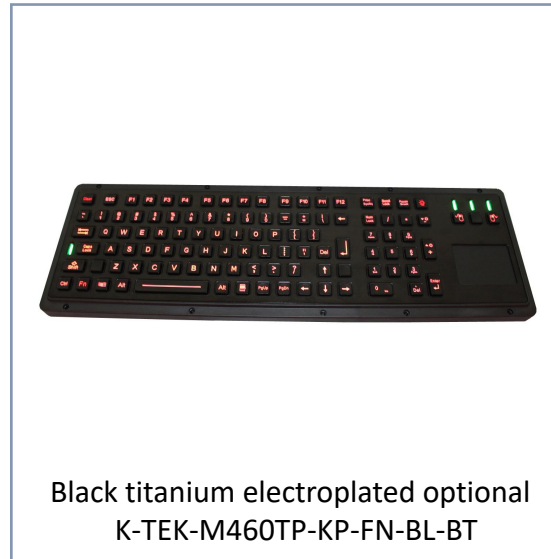




- Sealing with IP65, 84 Keys
- Numeric keys on the right part
- Scratch-proof high quality black titanium electroplated on the top surface
- Integrated with chameleon trackball at 400DPI
- 3 types of stainless steel trackballs/touchpad for optional
- Red/blue/white/green color backlit optional
- Top panel mount with threaded bolts
- Customized layout available

IP Grade	IP65
Interfaces	USB/PS2
Key travel	2.0mm
Switch life	5 million
Dimension	400.0mm x 124.0mm (Front panel)

Alternatives

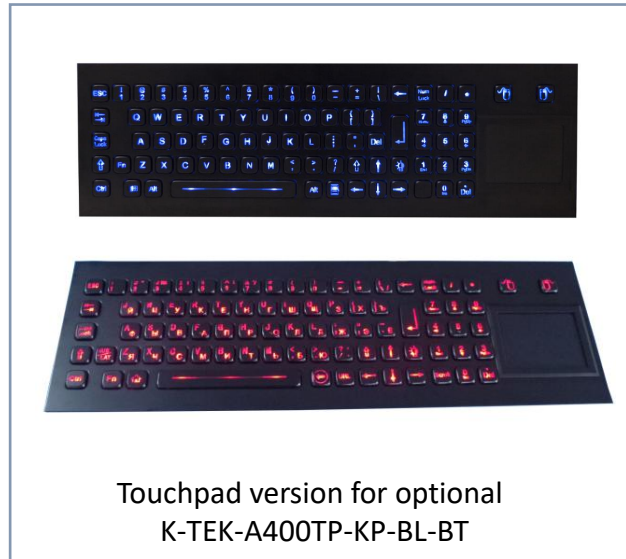




- Sealing with IP67, 101 Keys
- All-in-one keyboard
- Fn keys on the upper line
- Numeric keys on the right part
- Scratch-proof high quality black titanium electroplated to withstand salt spray
- With IP68 optical trackball at 800DPI
- Top panel mount with threaded bolts
- Customized layout available

IP Grade	IP67
Interfaces	USB/PS2
Key travel	2.0mm
Switch life	5 million
Dimension	420.0mm x 145.0mm (Front panel)

Alternatives

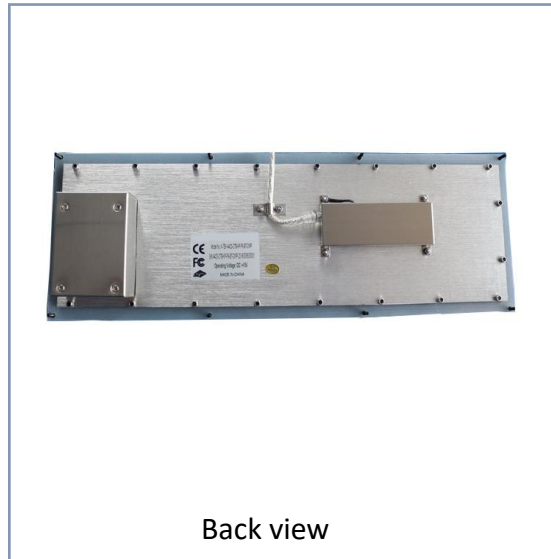

Drawer/Plastic industrial keyboard

Factory offers pushloading drawers for a comfortable installation in 19" racks.

- Dimension: standard 19"1U/ 19"2U available
- Customization service
We provide integration service, please contact us for more details.
- Handle solution
- Slider lock solution
- Locker solution





- Sealing to IP67, silicone rubber Hygienic keyboard drawer
- Integrated numeric keypad and tough touchpad
- FN+Clean keys to freeze keyboard when cleaning
- With black Titanium electroplated stainless steel drawer
- 1U design
- Full functionalities 4-in-1 keyboard
- Ease of customized languages

IP Grade	IP67
Interfaces	PS2, USB available
Color available	Black
Key type	1.50mm
Dimension	482.60mm x 426.0mm x44.0mm(L x W x H)

Alternatives



Back View



K-TEK-M399TP-KP-FN-V02



K-TEK-M399TP-KP-FN

K-TEK-1U-KB-TP-PL



- Designed for 1U /19' rack cabinet
- Integrated with plastic industrial keyboard
- Sealed tough touchpad integrated
- Hot pluggable
- Metal case
- Customized layout and size available
- Stainless steel rack available

IP Grade	IP65
Interfaces	USB/PS2/DB9F
Cable Length	1.8m
Working Temperature	0 °C - 40 °C
Dimension	440.0mm x 355.0mm x 42.5mm (L x W x H)

Alternatives



Side view



Back view



Silicone rubber keyboard optional
K-TEK-M399TP-KP-FN-V01



Stainless steel keyboard and
touchpad optional
K-TEK-A320KP-FN-A83TP-B4-SJ



- Super slim plastic rugged keyboard
- Stand alone desktop version
- With ruggedized and sealed touchpad
- Built-in one USB2.0 Hub
- Customized layout available
- Light and fast typing

Keys	86
Interfaces	USB/PS2
Key travel	0.15mm
Switch life	3 million
Dimension	260.0mm x 210.0mm x 14.5 mm (L x W x H)


Alternatives



Back view



With one USB HUB available

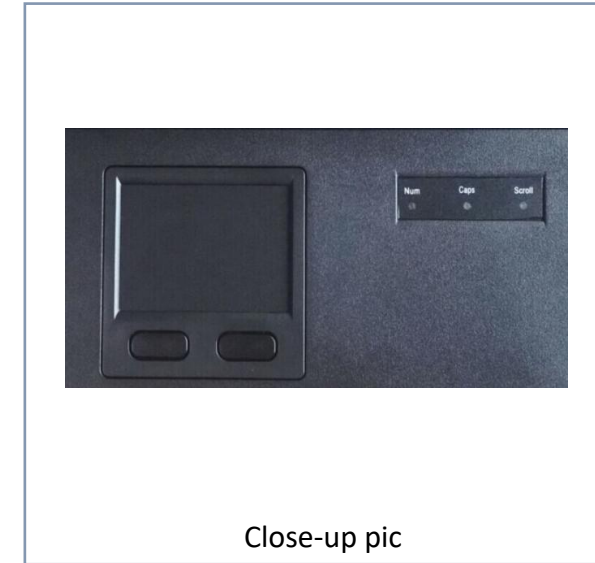

Close-up pic



- Super slim plastic rugged keyboard
- Stand alone desk top version
- With F1.F2....F12 FN keys
- Built-in two USB2.0 Hub
- Advanced version with touchpad optional
- Customized layout available

Keys	88
Interfaces	USB/PS2
Key travel	2.0mm
Switch life	3 million
Dimension	310mm*115mm*8mm (L x W x H)

Alternatives



Back view



K-TEK-C315-OTB-FN-DT



With touchpad for optional
K-TEK-C315TP-FN-DT



- Super slim plastic rugged keyboard
- Stand alone desktop version
- With Mini plastic trackball at 14.0mm diameter
- Optical trackball for fast and accurate cursor position
- Built-in two USB2.0 Hub for your easy connection

Keys	88
Interfaces	USB/PS2
Key travel	2.0mm
Switch life	3 million
Dimension	370.0mm x 138.0mm x 23.0mm (L x W x H)

Alternatives



Side view



More photos with USB/PS2 Cable



With two Hubs



- Super slim plastic rugged keyboard
- Upgrade scissors switch technology
- Stand alone desktop version
- With F1.F2....F12 FN keys
- Integrated sealed and ruggedized touchpad
- With two mouse button for right and left clicking
- Customized layout available
- Trackball optional

Keys	89
Interfaces	USB/PS2
Key travel	2.0mm
Switch life	3 million
Dimension	400.0mm x 135.5mm x 13.0mm (L x W x H)

Alternatives



Back View



Trackball version optional
K-TEK-C400TB-FN-DT




- Super slim plastic rugged keyboard
- Upgraded scissors switch technology
- Stand alone desktop version
- With F1.F2....F12 FN keys
- With numeric keypad
- Integrated sealed and ruggedized touchpad
- Customized layout available

Keys	96
Interfaces	USB
Key travel	2.0mm
Switch life	3 million
Dimension	366.6mm x 124.4mm x 13.4mm (L x W x H)


Alternatives



Back View

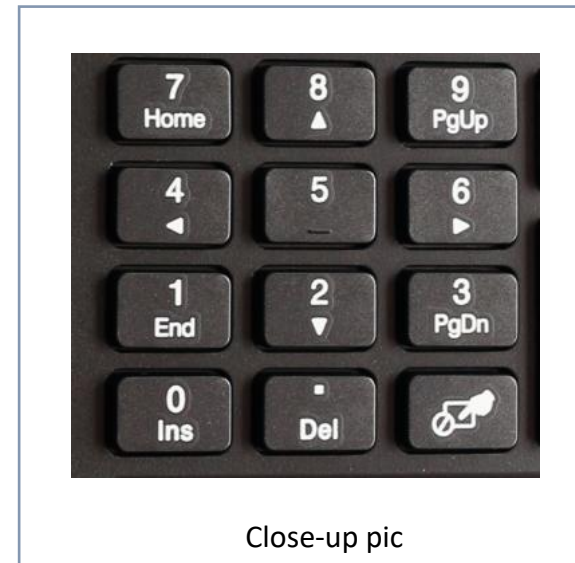

Close-up pic

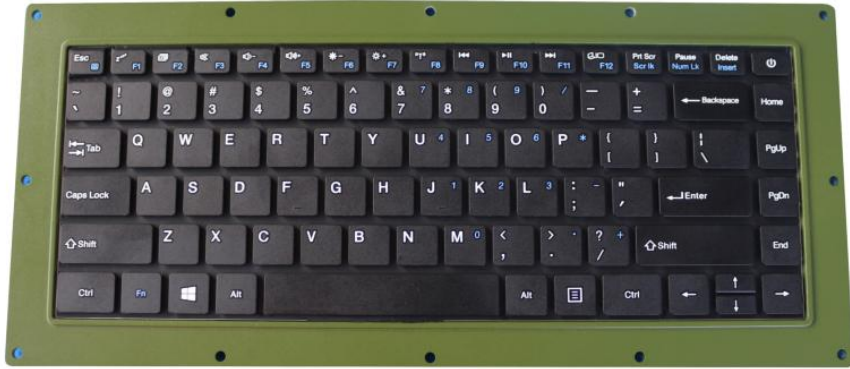

- Sealing to IP65
- Scissors switch technology
- Customized layout available
- Ultra thin design
- Dot matrix interface
- Industrial level or Military level optional
- Different backplate color optional
- Rear panel mounted solution

IP Grade	IP65
Interfaces	Dot matrix/USB
Color available	Black
Backlit color	/
Dimension	301.2mmx117.5mm(Front Panel)

Alternatives



K-TEK-V355KP-FN-SC

Ruggedized Plastic Keyboard



- Sealing to IP54
- Scissors switch technology
- Customized layout available
- Ultra thin design
- With numeric keys and FN keys
- Industrial level
- With mounting holes for rear panel mount

IP Grade	IP54
Interfaces	USB/dot matrix
Color available	Black
Backlit color	/
Dimension	355mm x 125mm (Front Panel)

Alternatives



Back View



K-TEK-V342KP-FN-AC with dot matrix



K-TEK-V300-FN-UT-RP



- Slim plastic rugged keyboard
- Stand alone desktop version
- IP68 rated washable waterproof rated
- With F1.F2....F12 FN keys and numeric keypad
- Long stroke with comfortable and soft-touch typing
- Plug and play

Keys	104
Interfaces	USB
Key travel	2.2±0.2mm
Switch life	5 million
Dimension	439.0mm (L) x 142.0mm (W) x 25.2mm (H)

Alternatives



Back View



Close-up pic


PUBLIC TELEPHONE SET with keypad



- Sealing to IP65
- Robust design, vandal proof structure
- Connector, Hook, keypad, housing for optional
- Magnetic fork or mechanical fork optional

IP Grade	IP65
Interfaces	USB/RJ45/RJ11
Key travel	2.0mm
Switch life	3 million
Dimension	No

Alternatives

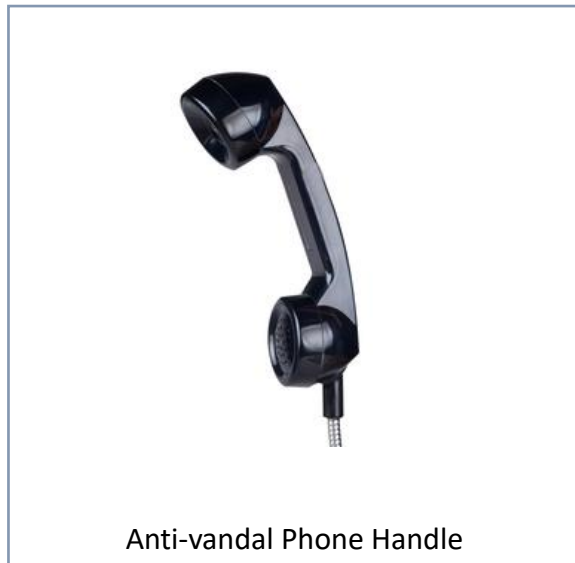

Stay tuned to more new items...



AGS-Electronics, Ph: 505-550-6501 & 505-565-5102

Fx: 505-814-5778, Em: sales@ags-electronics.com

Web: <http://www.ags-electronics.com>

Contact us